

The ACEINNA VG280ZA is a miniature fully-calibrated Vertical Gyroscope designed for demanding embedded applications that require a complete dynamic measurement solution in a robust low-profile package. The VG280ZA provides a standard UART Interface (contact factory for SPI) for cost-effective board-to-board communications.



*UAV Flight Control*



*Uncertified Avionics*


The ACEINNA VG280ZA integrates highly-reliable MEMS 6DOF inertial sensors with extended Kalman filtering in a miniature factory-calibrated module to provide consistent performance through the extreme operating environments in a wide variety of dynamic control and navigation applications. A pin-compatible upgrade (VG380) is also available.

## Features

- Complete 6DOF Inertial System
- Roll/Pitch Outputs
- UART Interface
- Update Rate, 1Hz to 100Hz
- 1KHz Clock Sync Input
- Miniature Package, 24 x 37 x 9.5 mm
- Lightweight < 17 g
- Low Power Consumption < 250 mW
- Wide Temp Range, -40C to +85C
- Pin-compatible with VG380ZA

## Applications

- Unmanned Vehicle Control
- Uncertified Avionics
- Platform Stabilization
- Robotics Control

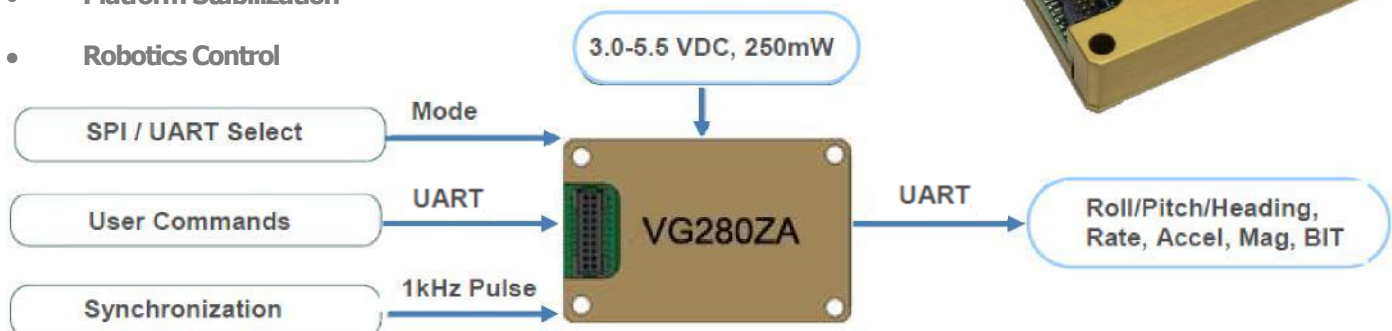

## Performance

## VG280ZA (-200, -400

Attitude	
Range: Roll, Pitch (°)	± 180, ± 90
Accuracy (°)	< 1.0 <sup>4</sup> , < 2.0 <sup>3</sup>
Resolution (°)	< 0.02
Angular Rate	
Range: Roll, Pitch (°/sec)	± 200 (± 400 High Range Model)
Bias Instability (°/hr) <sup>1,2</sup>	< 20
Bias Stability Over Temp (°/sec) <sup>2</sup>	< 0.2
Resolution (°/sec)	< 0.02
Scale Factor Accuracy (%)	< 0.2
Non-Linearity (%FS)	< 0.2
Angle Random Walk (°/√hr) <sup>2</sup>	< 1.5
Bandwidth (Hz)	5-50 (user-configurable)
Acceleration	
Range: X, Y, Z (g)	±4 (± 8 High Range Model)
Bias Instability (mg) <sup>1,2</sup>	< 0.05
Bias Stability Over Temp (mg) <sup>2</sup>	< 15
Resolution (mg)	< 0.5
Scale Factor Accuracy (%)	< 0.2
Non-Linearity (%FS)	< 0.2
Velocity Random Walk (m/s/√hr) <sup>2</sup>	< 0.1
Bandwidth (Hz)	5-50 (user-configurable)

## Specifications


Environment	
Operating Temperature (°C)	-40 to +85
Non-Operating Temperature (°C)	-55 to +105
Enclosure	Aluminum (Gold Anodized)
Electrical	
Input Voltage (VDC)	3.0 to 5.5
Power Consumption (mW)	< 250
Digital Interface	UART (C.F. for SPI)
Output Data Rate	1Hz to 100Hz (user-configurable)
Input Clock Sync	1kHz Sync Pulse
Physical	
Size (mm)	24.15 x 37.7 x 9.5
Weight (gm)	< 17
Interface Connector	20-Pin (10 x 2) 1.0 mm pitch header

## Ordering Information

Model	Description
VG280ZA-200	Vertical Gyroscope (200dps Range)
VG280ZA-400	Vertical Gyroscope (400dps Range)
EVAL-KIT DMU280ZA-200	9DOF STD Range Evaluation Kit
EVAL-KIT DMU280ZA-400	9DOF High Range Evaluation Kit

This product has been developed exclusively for commercial applications. It has not been tested for, and makes no representation or warranty as to conformance with, any military specifications or its suitability for any military application or end-use. Additionally, any use of this product for nuclear, chemical or biological weapons, or weapons research, or for any use in missiles, rockets, and/or UAV's of 300km or greater range, or any other activity prohibited by the Export Administration Regulations, is expressly prohibited without the written consent and without obtaining appropriate US export license(s) when required by US law. Diversion contrary to U.S. law is prohibited. Specifications are subject to change without notice.

<sup>1</sup> Allan Variance Curve, constant temperature. <sup>2</sup> 1-sigma error. <sup>3</sup> RMS error under all dynamics. <sup>4</sup> RMS error under static conditions over full temperature range.

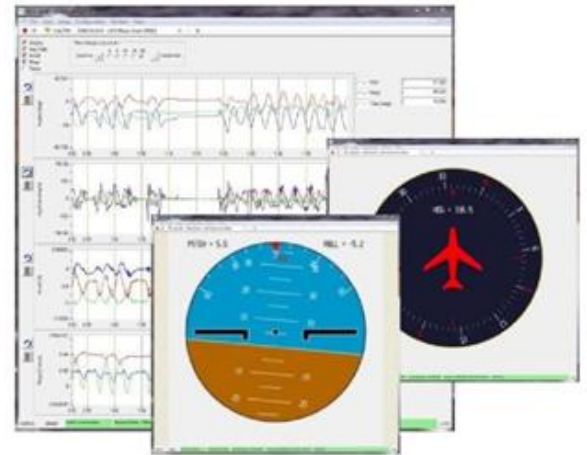

NAV-VIEW provides an easy to use graphical interface to display, record, playback, and analyze all of the VG280ZA System parameters.

NAV-VIEW can also be used to set a wide range of user-configurable fields in the VG280ZA to optimize the system performance for highly dynamic applications.

NAV-VIEW software is available for download from ACEINNA's website at: [www.aceinna.com/support](http://www.aceinna.com/support)

## Other Components

The DMU280ZA evaluation kits include an VG280ZA, evaluation board, and USB cable allowing direct connection to a PC for use with NAV-VIEW display and configuration software.

## Support

For more detailed information please refer to the DMU280ZA Series User's Manual available online at: [www.aceinna.com/support](http://www.aceinna.com/support)