



**VTC Inc.**  
Value the Customer™

# VM201

## LOW-NOISE, FERRITE HEAD, SERVO PREAMPLIFIER

July, 1992

### FEATURES

- IBM - Compatible
- Low Noise 0.7 nV $\sqrt{\text{Hz}}$  Typical
- Wide Bandwidth: 40 MHz
- Wide Supply Range: -7 V to -13.2 V
- Low Output Offset Voltage:  $\pm 50$  mV Typical

### DESCRIPTION

The VM201 is a low-noise, wide-bandwidth differential amplifier. The VM201 has open collector outputs.

### ABSOLUTE MAXIMUM RATINGS

Power Supply Voltages:


$V_{CC}, V_{EE}$ .....	14V
Differential Input Voltage .....	5V
Output Voltage .....	6V
Storage Temperature Range .....	-65 to +150°C
Lead Temperature (Soldering 60 Sec.) .....	260°C
Operating Temperature Range .....	-55°C to +125°C
Junction Temperature .....	150°C
Thermal Characteristics, $\theta_{JA}$ :	
8-lead PDIP, SOIC .....	18°C/W

### RECOMMENDED OPERATING CONDITIONS


DC Power Supply Voltage:

$V_{CC}, V_{EE}$ .....	-7V to -13.2V
Input Signal, $V_{IN}$ .....	25mVp-p
Operating Junction Temperature .....	25° to +125°C

### CONNECTION DIAGRAM

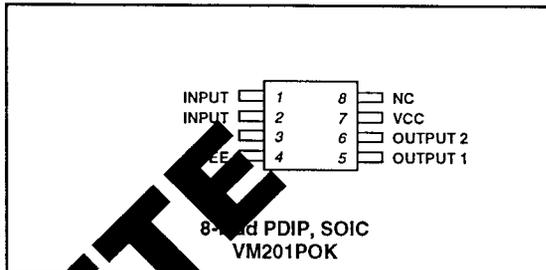

### BLOCK DIAGRAM

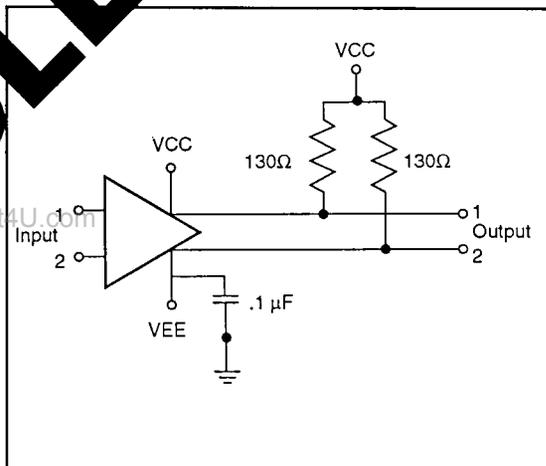

OBSOLETE

**ELECTRICAL CHARACTERISTICS** Unless otherwise specified,  $T_A = 25^\circ\text{C}$ ,  $V_{CC} - V_{EE} = 8.3\text{V}$ .

PARAMETER	SYM	CONDITIONS	MIN	TYP	MAX	UNITS
Differential Voltage Gain	$A_V$	$V_{IN} = 1\text{mVp-p}$ , $f = 1\text{MHz}$	80	100	120	V/V
Gain Variation		100KHz to 10MHz			$\pm 0.5$	dB
Bandwidth	BW	$V_{IN} = 1\text{mVp-p}$	30	40		MHz
Differential Input Voltage	$V_{DIFF}$			7		mVp-p
Undistorted Differential Output	$V_{UDO}$		600			mVp-p
Differential Output Offset Voltage	$V_{OS}$	Input shorted together	-400	$\pm 50$	400	mVp-p
Input Noise Voltage	$e_{in}$	$f = 100\text{KHz}$ to $10\text{MHz}$		0.70	1.2	nV/ $\sqrt{\text{Hz}}$
Common Mode Output Voltage	$V_{OCM}$	Input shorted together Output shorted together	$V_{CC} - 0.5$	$V_{CC} - 0.65$	$V_{CC} - 0.8$	V
Common Mode Rejection Ratio	CMMR	$V_{IN} = 100\text{mVp-p}$ , $f = 1\text{MHz}$	50	70		dB
Power Supply Rejection Ratio	PSSR	$V_{EE} = 100\text{mVp-p}$ , $f = 1\text{MHz}$	60	67		dB
Differential Input Resistance	$R_{IN}$		800	1000	1200	$\Omega$
Differential Input Capacitance	$C_{IN}$			15	25	pF
Power Supply Current	$I_{EE}$	$V_{EE} = -8.3\text{V}$		19	30	mA

**ELECTRICAL CHARACTERISTICS vs SUPPLY VOLTAGE** Unless otherwise specified,  $T_A = 25^\circ\text{C}$ ,  $V_{CC} - V_{EE} = -7.3$  to  $-13.2\text{V}$ .

PARAMETER	SYM	CONDITIONS	MIN	TYP	MAX	UNITS
Differential Voltage Gain	$\Delta A_V$			0.82	1.2	%V
Differential Output Offset Voltage	$\Delta V_{OS}$			0.86	3	mV/V
Common Mode Output Voltage	$\Delta C_{MOV}$			9	15	mV/V
Supply Current	$\Delta I_{EE}$			0.6	1.5	mA/V

**ELECTRICAL CHARACTERISTICS vs TEMPERATURE** Unless otherwise specified,  $T_A = 25^\circ\text{C}$ ,  $V_{CC} - V_{EE} = -8.3$ .

PARAMETER	SYM	CONDITIONS	MIN	TYP	MAX	UNITS
Differential Voltage Gain	$\Delta A_V$	$15^\circ\text{C} \leq T_A \leq 100^\circ\text{C}$		0.11	0.23	% $^\circ\text{C}$
Differential Output Offset Voltage	$\Delta V_{OS}$	$15^\circ\text{C} \leq T_A \leq 100^\circ\text{C}$		0.03	0.5	mV $^\circ\text{C}$
Common Mode Output Voltage	$\Delta C_{MOV}$	$15^\circ\text{C} \leq T_A \leq 100^\circ\text{C}$		0.86	1.5	mV $^\circ\text{C}$
Supply Current	$\Delta I_{EE}$	$15^\circ\text{C} \leq T_A \leq 100^\circ\text{C}$		0.03	0.5	mA $^\circ\text{C}$