

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5 – 3.3V Output / 10A


bel
POWER PRODUCTS

BP06VRPC-10A

VRPC-10A Series

RoHS Compliant

- Nonisolated
- Industry standard pinout
- Fixed frequency
- High efficiency means less power dissipation
- Optimized for cost
- Remote on/off
- Undervoltage lockout
- Over current and short circuit protection

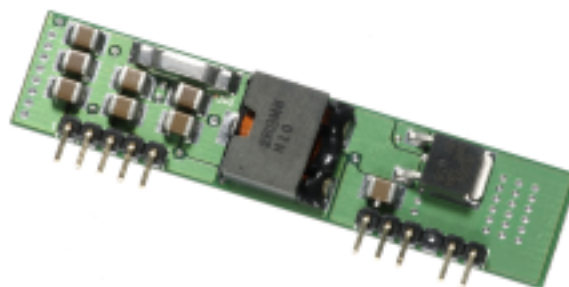

Description

The Bel VRPC-10A series modules are non-isolated, step down DC/DC power converters that operate from a nominal 12V source. These converters are available in a range of output voltages from 1.5V to 3.3V. They are packaged in an industry standard single-in-line footprint and provide a maximum 10A output. Standard features include remote on/off, over current protection and output voltage adjust. Remote sense is an optional feature. These products may be used almost anywhere low-voltage silicon is employed and a 12V source is available. Typical applications include file servers, routers, line cards and other computing and communications equipment.

Applications

- Telecommunications
- Networking
- Computers and peripherals

Options

- Remote sense

Part Number Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number	Part Number Remote Sense Option
3.3V	12V	10A	33W	91%	VRPC-10A330	VRPC-10A33S
2.5V	12V	10A	25W	89%	VRPC-10A250	VRPC-10A25S
1.5V	12V	10A	15W	85%	VRPC-10A150	VRPC-10A15S

Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Continuous Input Voltage	Vin	-0.3		15	V
Output Enable Terminal Voltage	Vouten	-0.3		15	V
Ambient Temperature	Tamb	0		70	°C
Storage Temperature	Tstor	-40		100	°C

Note: Use beyond the maximum ratings may cause a reliability degradation of the DC/DC converter or may permanently damage the device.

Input Specifications

Parameter	Symbol	Min	Typical	Max	Units
Operating Input Voltage	Vin	10.8		13.2	V
Input Current	Iin			3.8	A
No Load Input Current				50	mA
Remote Off Input Current			3	15	mA
Input Reflected Ripple Current ¹				50	mA _{rms}
Input Reflected Ripple Current (P-P) ¹				180	mApk
I ² t Inrush Current Transient			0.08	0.16	A ² s
Turn On Voltage Threshold			9.7		V
Turn Off Voltage Threshold		8.0	8.8	10.0	V

Note: Input capacitance 470µF/16V, ESR = 0.03 Ω max at 100kHz @ 25° C.

1. With simulated source impedance of 500nH, 5Hz to 20MHz.

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5 – 3.3V Output / 10A



BP06VRPC-10A

Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Output Voltage Set Point ¹	3.3V 2.5V 1.5V	Vout	3.247 2.460 1.476	3.3 2.5 1.5	3.353 2.540 1.524	V
Load Regulation	3.3V 2.5V 1.5V			7 5 3	16 10 10	mV
Line Regulation	All			3	10	mV
Regulation Over Temperature 0° - 70° C	3.3V 2.5V 1.5V			5 5 5	46 35 20	mV
Total Output Voltage Regulation	3.3V 2.5V 1.5V			15 10 10	72 55 40	mV
Output Ripple and Noise ²	3.3V 2.5V 1.5V			55 50 45	100 100 100	mVp-p
Output Ripple and Noise ²	3.3V 2.5V 1.5V			17 15 10	25 25 25	mVrms
Output Current Range	All	Iout	0		10	A
Output DC Current Limit	All	Ioutlim	13		22	A
Short Circuit Surge	3.3V 2.5V 1.5V	Ioutsurge		0.35 0.40 0.35	0.7 0.8 0.7	A ² s
Turn on Time	All	Ton		50	80	ms
Overshoot at Turn On	All			0	3	%
Output Capacitance	All	Cout	100		3300	μF

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

1. Vin = 12V, Iout = full load, Ta = 25° C.

2. 0 - 20MHz BW, 0.1μF ceramic cap on output.



NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5 – 3.3V Output / 10A

BP06VRPC-10A

Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Transient Response ³						
ΔV 50% to 100% of Max Load	3.3V			100	150	mV
Settling Time		Ts		40	70	μs
ΔV 100% to 50% of Max Load				100	150	mV
Settling Time		Ts		40	70	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	2.5V			80	150	mV
Settling Time		Ts		30	70	μs
ΔV 100% to 50% of Max Load				80	150	mV
Settling Time		Ts		30	70	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	1.5V			60	150	mV
Settling Time		Ts		30	70	μs
ΔV 100% to 50% of Max Load				60	150	mV
Settling Time		Ts		30	70	μs

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.
 3. di/dt = 0.5A/ μs , Vin = 12VDC, Ta = 25° C, and with a 470 μF aluminum cap on output.

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5 – 3.3V Output / 10A



BP06VRPC-10A

General Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Efficiency ¹	c	η	88 86 82	91 89 85		%
Switching Frequency	All	F _{sw}	180	200	220	kHz
Output Voltage Trim Range	3.3V 2.5V 1.5V		85 70 90		110 120 120	%
Remote Sense Compensation	All				0.5	V
Weight	All			9.5		g

1. Vin=12V, full load and Ta=25° C.




DataSheet4U.com

Control Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Remote On/Off	All	V _{outen}				V
Signal Low (Unit Off)	All		-0.3		0.3	V
Signal High (Unit On)	All		2.8		13.2	V

BP06VRPC-10A

Efficiency Data

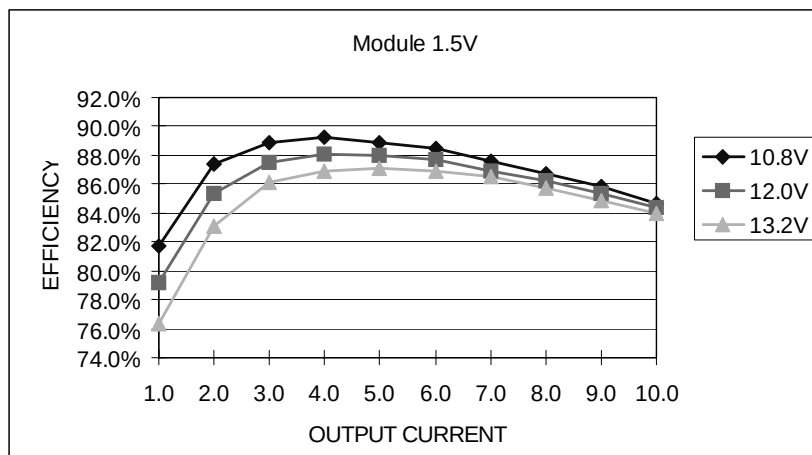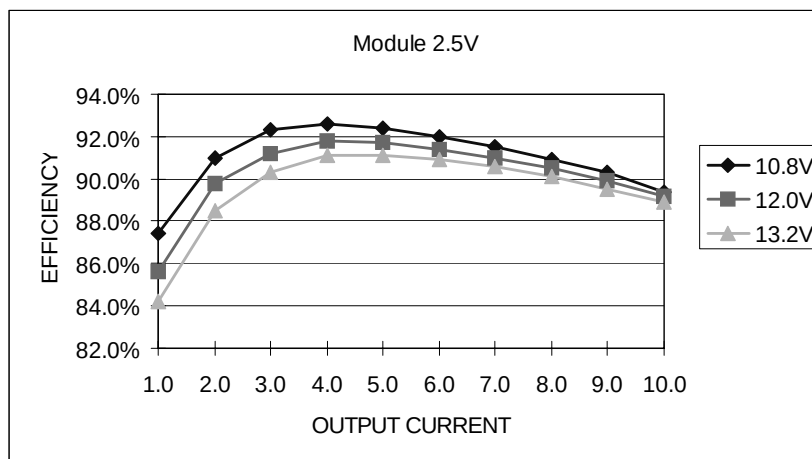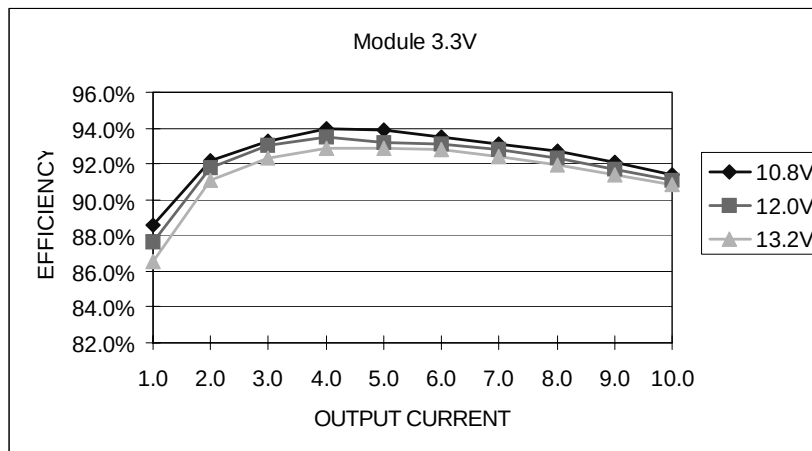


NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5 – 3.3V Output / 10A

bel
POWER PRODUCTS



BP06VRPC-10A

Ripple and Noise

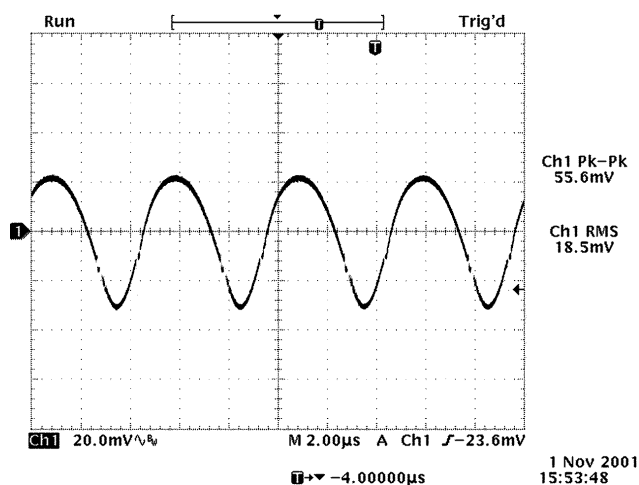
Ripple and noise at full load and 12Vdc input and $T_a=25^\circ\text{C}$

Transient Response

DataSheet4U.com

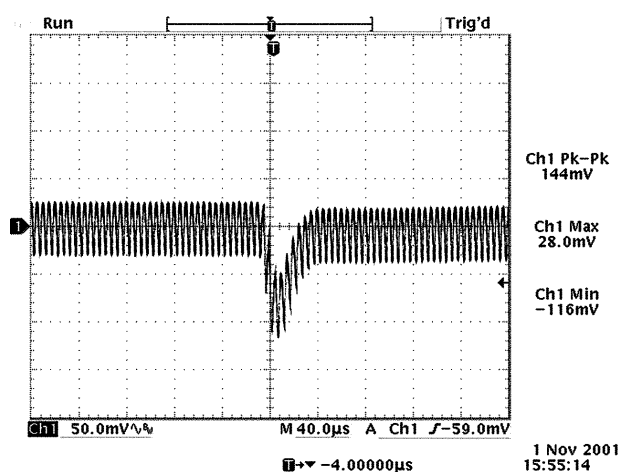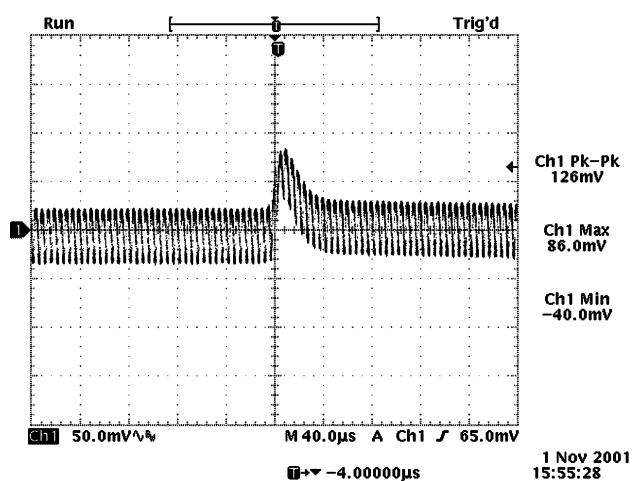Transient response: $di/dt = 0.5\text{A}/\mu\text{s}$, external load capacitance $C_o = 470\mu\text{F}$ (electrolytic)50% to 100% load transients at 12V input and $T_a=25^\circ\text{C}$ 100% to 50% load transients at 12V input and $T_a=25^\circ\text{C}$

Thermal Considerations

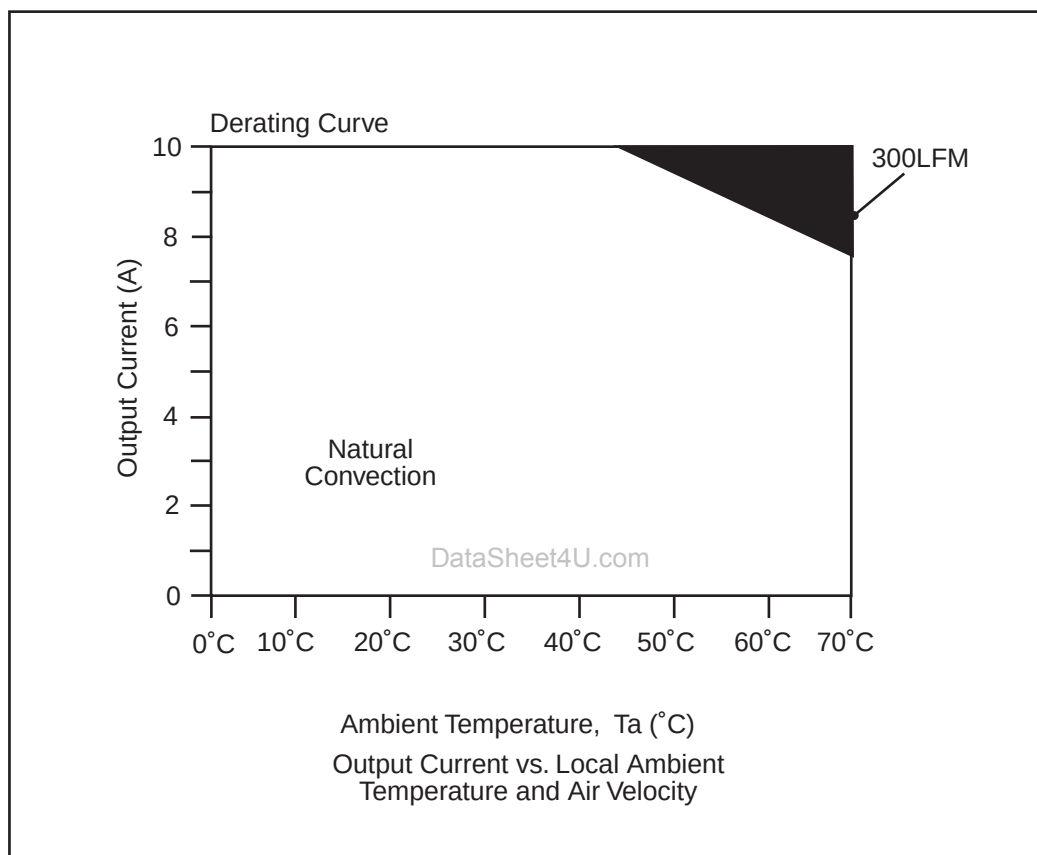


NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5 – 3.3V Output / 10A

bel
POWER PRODUCTS

BP06VRPC-10A


Mechanical

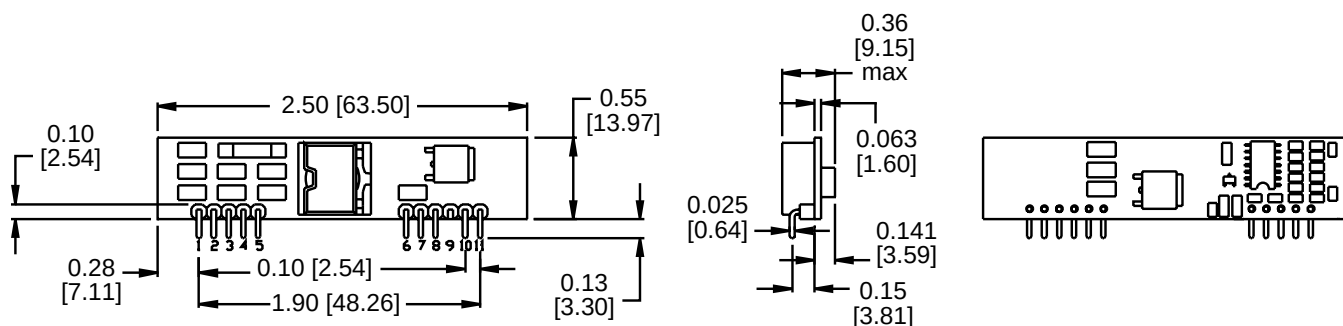

Dimensions are in inches [millimeters].
Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

Pin	Function
1	+Vo
2	+Vo
3*	No Pin
4	+Vo
5	Ground
6	Ground
7	+Vin
8	+Vin
9	No Pin
10	Trim
11	Remote On/Off

DataSheet4U.com

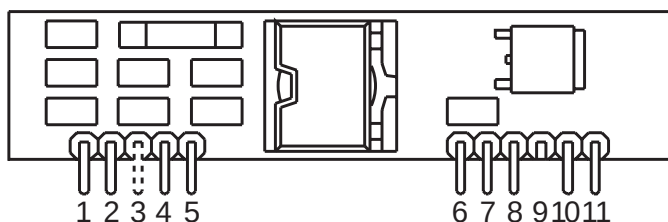

*Pin 3 used for remote sense option.

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240°C.



©2006 Bel Fuse Inc. Specifications subject to change without notice. 06.06

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K. www.DataSheet4U.com
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com