

Features



- N-Channel, 5V Logic Level Control
- Enhancement mode
- Low on-resistance $R_{DS(on)}$ @ $V_{GS}=4.5\text{ V}$
- 100% Avalanche Tested
- Pb-free lead plating; RoHS compliant



Part ID	Package Type	Marking	Tape and reel information
VST013N10MS	TO-220AB	013N10M	50pcs/Tube

V_{DS}	100	V
$R_{DS(on),TYP@ V_{GS}=10\text{ V}}$	11	mΩ
$R_{DS(on),TYP@ V_{GS}=4.5\text{ V}}$	12	mΩ
I_D	75	A

TO-220AB



Maximum ratings, at $T_j=25\text{ °C}$, unless otherwise specified

Symbol	Parameter	Rating	Unit
$V_{(BR)DSS}$	Drain-Source breakdown voltage	100	V
I_S	Diode continuous forward current	$T_C=25\text{ °C}$ 75	A
I_D	Continuous drain current @ $V_{GS}=10\text{ V}$	$T_C=25\text{ °C}$ 75	A
		$T_C=100\text{ °C}$ 53	A
I_{DM}	Pulse drain current tested ①	$T_C=25\text{ °C}$ 300	A
EAS	Avalanche energy, single pulsed ②	132	mJ
P_D	Maximum power dissipation	$T_C=25\text{ °C}$ 150	W
V_{GS}	Gate-Source voltage	±20	V
$T_{STG} T_J$	Storage and operating temperature range	-55 to 175	°C

Thermal Characteristics

Symbol	Parameter	Typical	Unit
$R_{\theta JC}$	Thermal Resistance-Junction to Case	1	°C/W
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	62.5	°C/W

Typical Characteristics

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ T _j = 25°C (unless otherwise stated)						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =100V,V _{GS} =0V	--	--	1	μA
	Zero Gate Voltage Drain Current(T _j =125°C)	V _{DS} =100V,V _{GS} =0V	--	--	100	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V,V _{DS} =0V	--	--	±100	nA
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} =V _{GS} ,I _D =250μA	1.0	--	2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance③	V _{GS} =10V, I _D =40A	--	11	14	mΩ
R _{DS(ON)}	Drain-Source On-State Resistance③	V _{GS} =4.5V, I _D =20A	--	12	15	mΩ
Dynamic Electrical Characteristics @ T _j = 25°C (unless otherwise stated)						
C _{iss}	Input Capacitance	V _{DS} =30V,V _{GS} =0V, f=1MHz	--	3630	--	pF
C _{oss}	Output Capacitance		--	245	--	pF
C _{rss}	Reverse Transfer Capacitance		--	160	--	pF
R _g	Gate Resistance	f=1MHz		1.9		Ω
Q _g	Total Gate Charge	V _{DS} =50V,I _D =40A, V _{GS} =4.5V	--	32	--	nC
Q _{gs}	Gate-Source Charge		--	6	--	nC
Q _{gd}	Gate-Drain Charge		--	10	--	nC
Switching Characteristics						
t _{d(on)}	Turn-on Delay Time	V _{DD} =50V, I _D =40A, R _G =3Ω, V _{GS} =10V	--	7.5	--	nS
t _r	Turn-on Rise Time		--	5.4	--	nS
t _{d(off)}	Turn-Off Delay Time		--	52	--	nS
t _f	Turn-Off Fall Time		--	8	--	nS
Source- Drain Diode Characteristics@ T _j = 25°C (unless otherwise stated)						
V _{SD}	Forward on voltage	I _{SD} =40A,V _{GS} =0V	--	0.9	1.2	V
t _{rr}	Reverse Recovery Time	T _j =25°C,I _{SD} =40A, V _{GS} =0V	--	24.5	--	nS
Q _{rr}	Reverse Recovery Charge	di/dt=100A/μs		14.5		nC

NOTE:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Limited by T_{Jmax} , starting $T_j = 25^\circ\text{C}$, $L = 0.5\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 18A$, $V_{GS} = 10V$. Part not recommended for use above this value
- ③ Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$.

Typical Characteristics

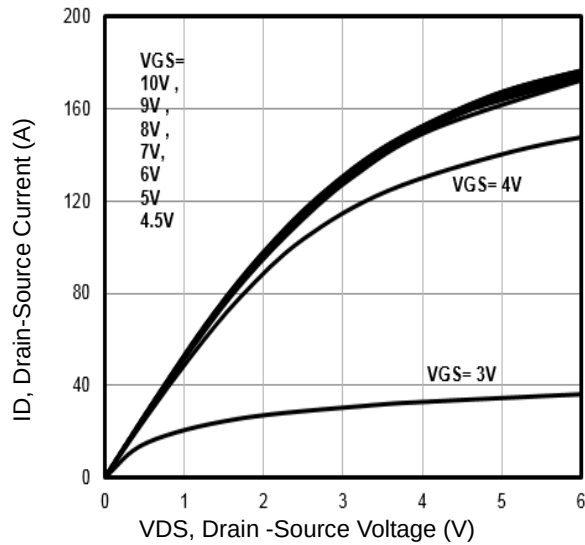


Fig1. Typical Output Characteristics

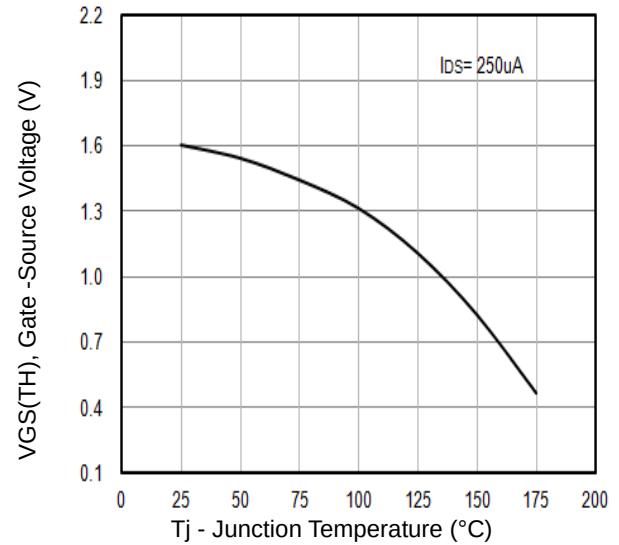


Fig2. $V_{GS(TH)}$ Gate-Source Voltage Vs. T_J

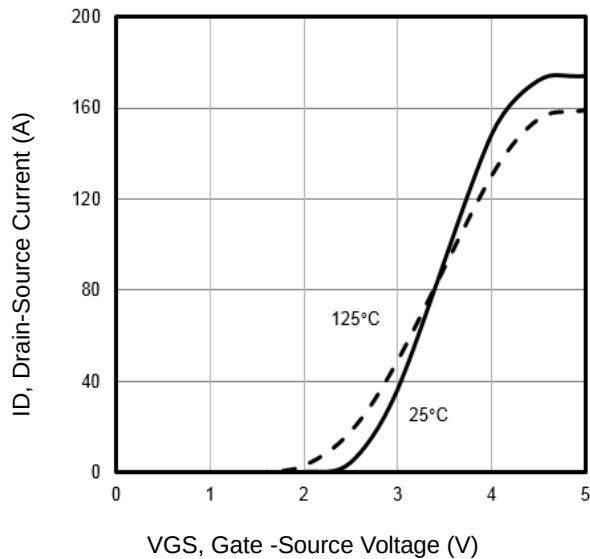


Fig3. Typical Transfer Characteristics

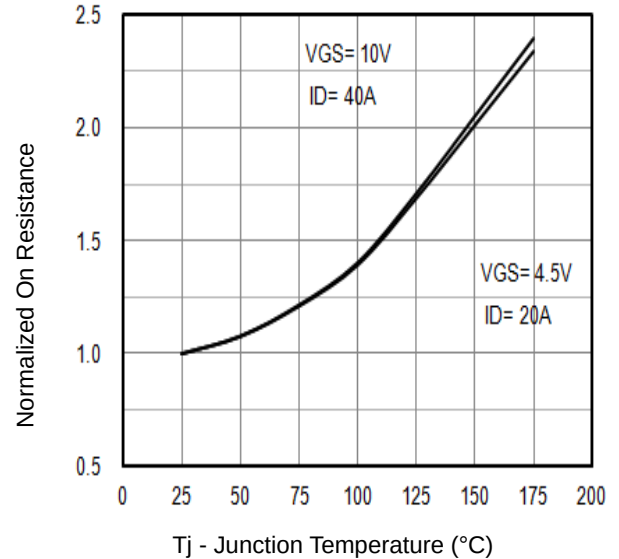


Fig4. Normalized On-Resistance Vs. Temperature

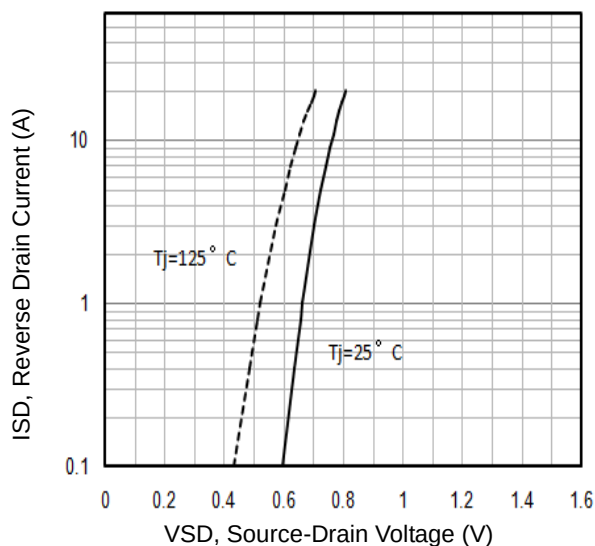


Fig5. Typical Source-Drain Diode Forward Voltage







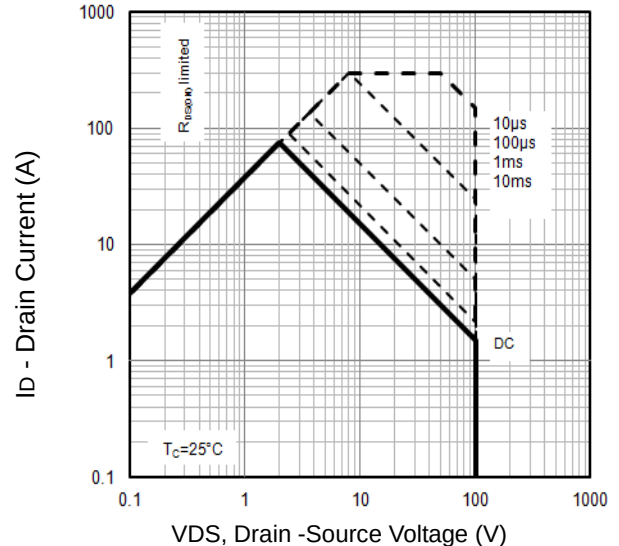


Fig6. Maximum Safe Operating Area

Typical Characteristics

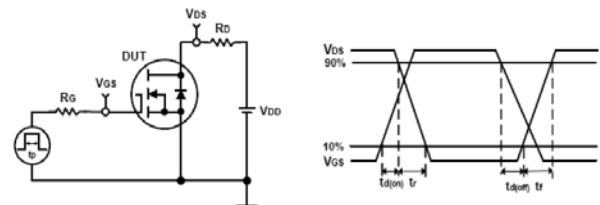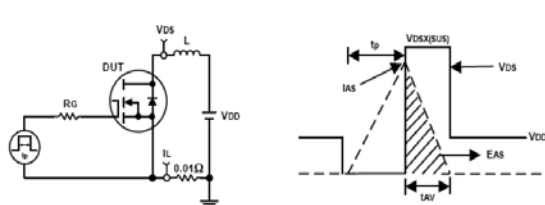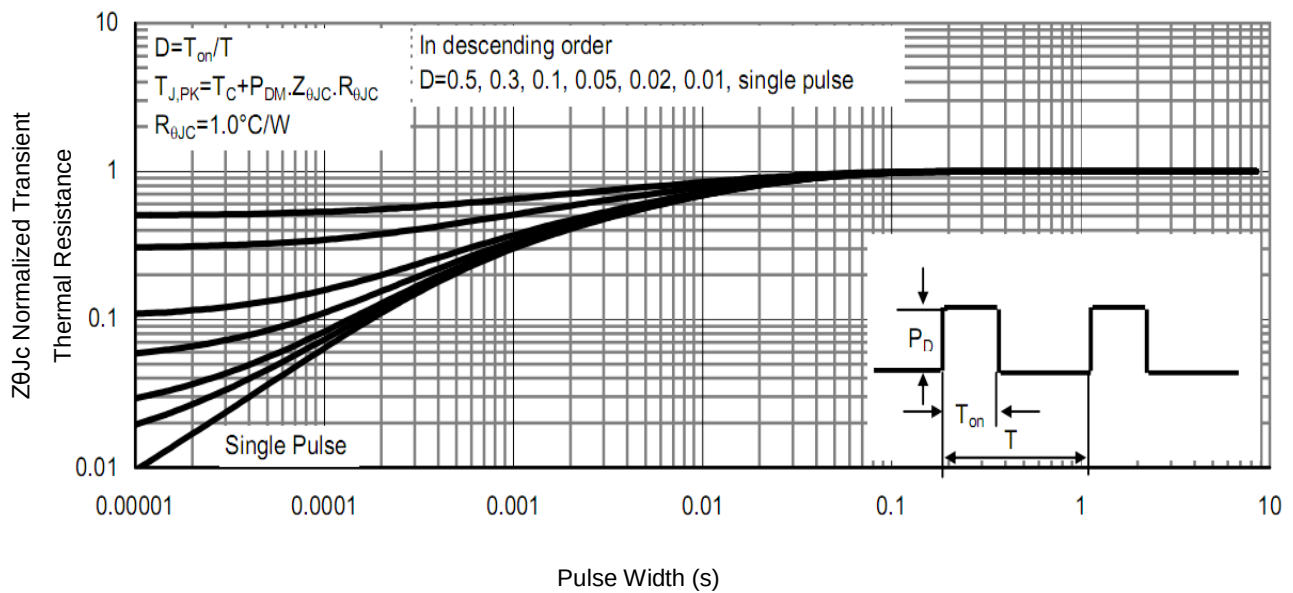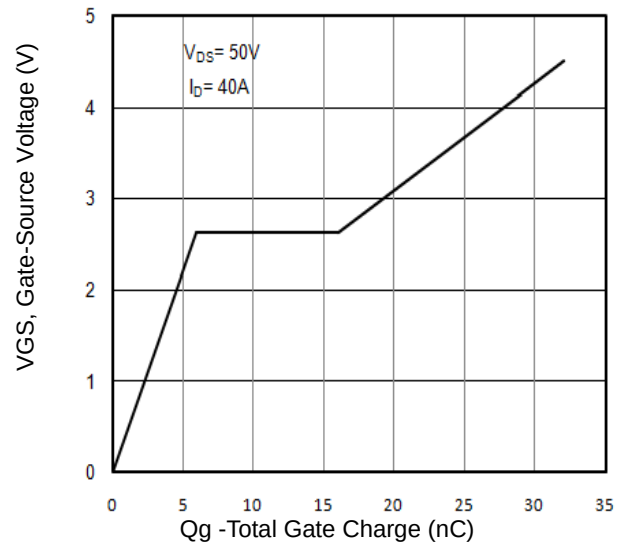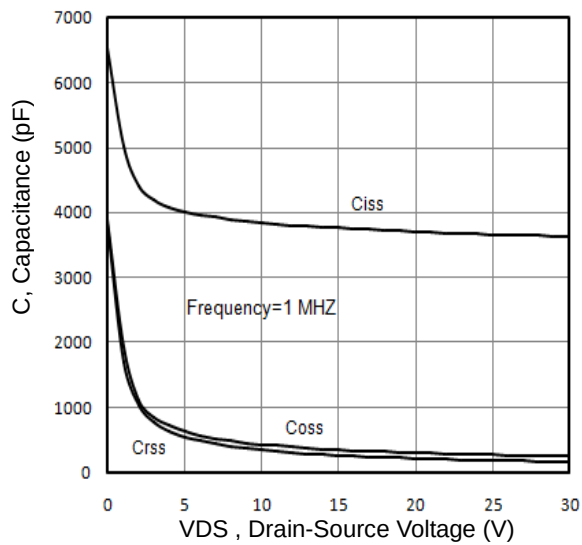

TO-220AB Package Outline Data

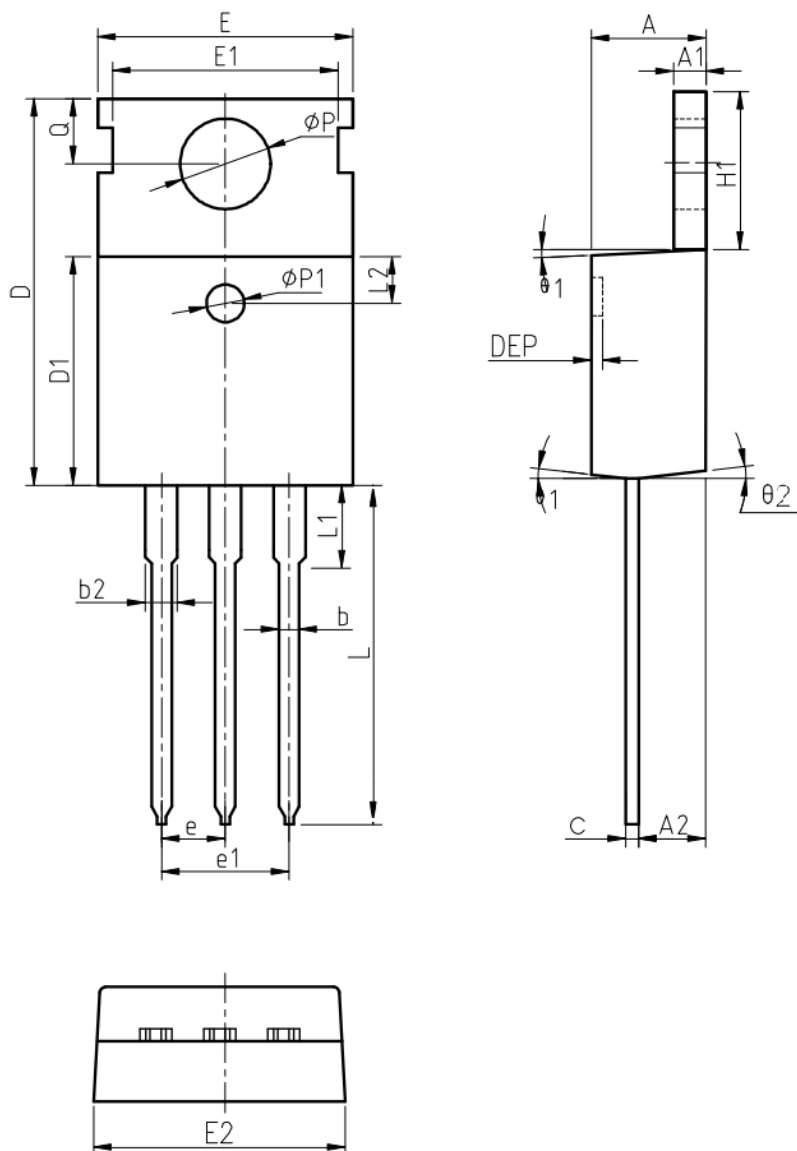

Symbol	Dimensions (unit: mm)		
	Min	Typ	Max
A	4.30	4.52	4.70
A1	1.15	1.30	1.40
A2	2.20	2.40	2.60
b	0.70	0.80	1.00
b2	1.17	1.32	1.50
c	0.45	0.50	0.61
D	15.30	15.65	15.90
D1	9.00	9.20	9.40
DEP	0.05	0.10	0.25
E	9.66	9.90	10.28
E1	-	8.70	-
E2	9.80	10.00	10.20
$\phi P1$	1.40	1.50	1.60
e	2.54 BSC		
e1	5.08 BSC		
H1	6.40	6.50	6.80
L	12.70	-	14.27
L1	-	-	3.95
L2	2.40	2.50	2.60
ϕP	3.53	3.60	3.70
Q	2.70	2.80	2.90
$\theta 1$	5 °	7 °	9 °
$\theta 2$	1 °	3 °	5 °

Notes:

1. Refer to JEDEC TO-220 variation AB
2. Dimension "D" and "E" do NOT include mold flash. Mold flash shall not exceed 0.127mm per side.

Customer Service

Sales and Service:

sales@vgsemi.com

Vanguard Semiconductor CO., LTD

TEL: (86-755) -26902410

FAX: (86-755) -26907027

WEB: www.vgsemi.com