

Features

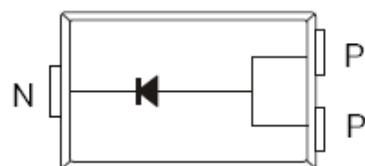
- ◆ Super low VF
- ◆ Low Power loss,high efficiency
- ◆ Fast switching,high frequency
- ◆ High current capability
- ◆ Lead-Free, RoHS Compliant

TO-277



Application

- ◆ Low Voltage High Frequency Invers Circuit
- ◆ Low Voltage Continued Circuit and Protection Circuit
- ◆ Low Voltage,High Frequency Switching Power Supply



Halogen-Free

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient Temperature unless otherwise specified. Single phase,half wave,60Hz,resistive or inductive load. For capacitive load.derate current by 20%.

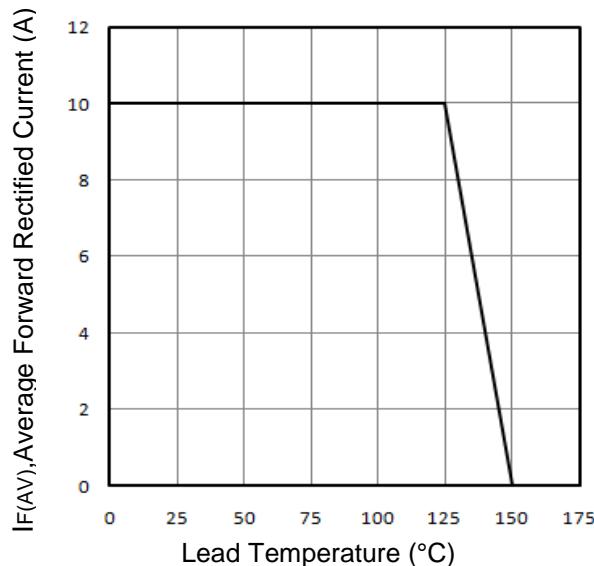
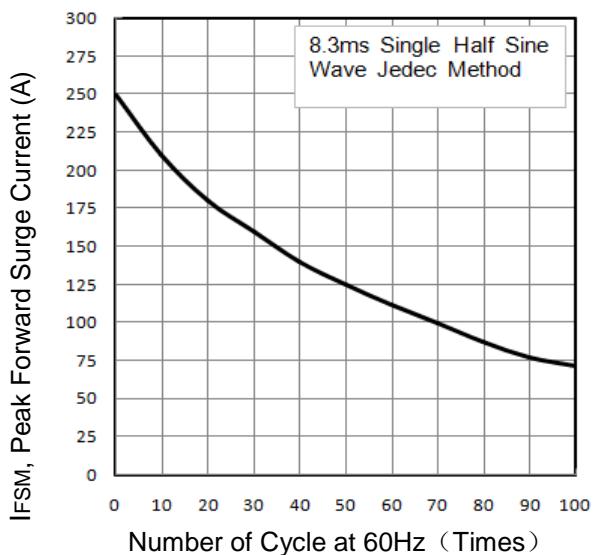
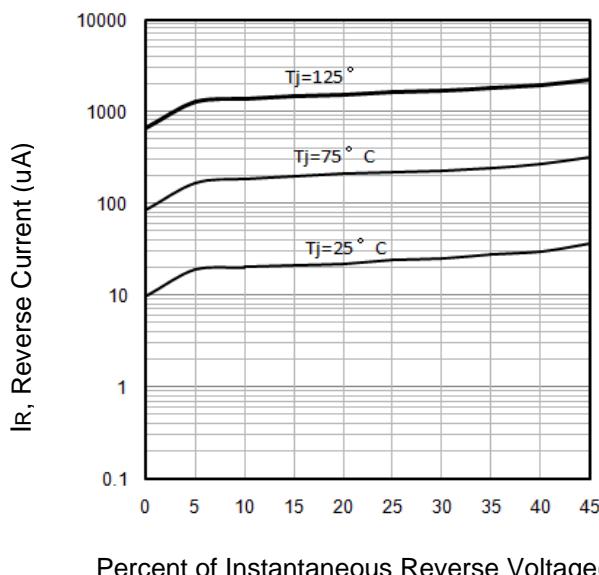
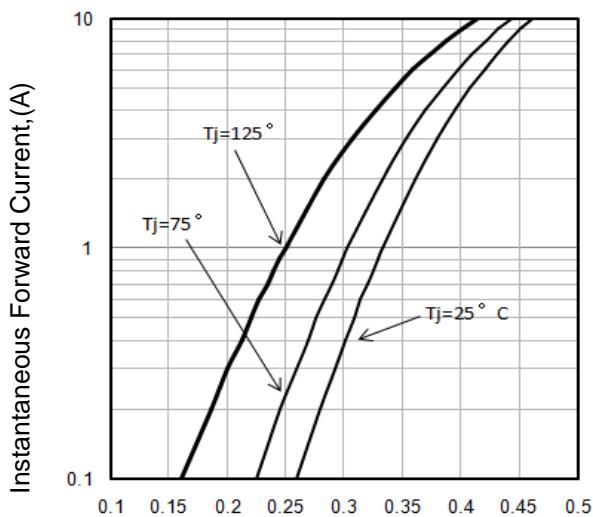
SYMBOL	PARAMETER	Value	UNITS
VR _{RM}	Maximum Recurrent Peak Reverse Voltage	45	V
V _R (RMS)	RMS Reverse Voltage	31.5	V
I _{F(AV)}	Maximum An Voltage	10	A
I _{FSM}	Peak Forward Surge Current: single half sine-wave superimposed on rated load(JEDEC method)	250	A
R _{θJC}	Typical Thermal Resistance, Junction to Case	3	°C
R _{θJA}	Typical Thermal Resistance, Junction to Ambient	73	°C/W
T _{j,Tstg}	Operating and Storage Junction Temperature Range	-55~150	°C

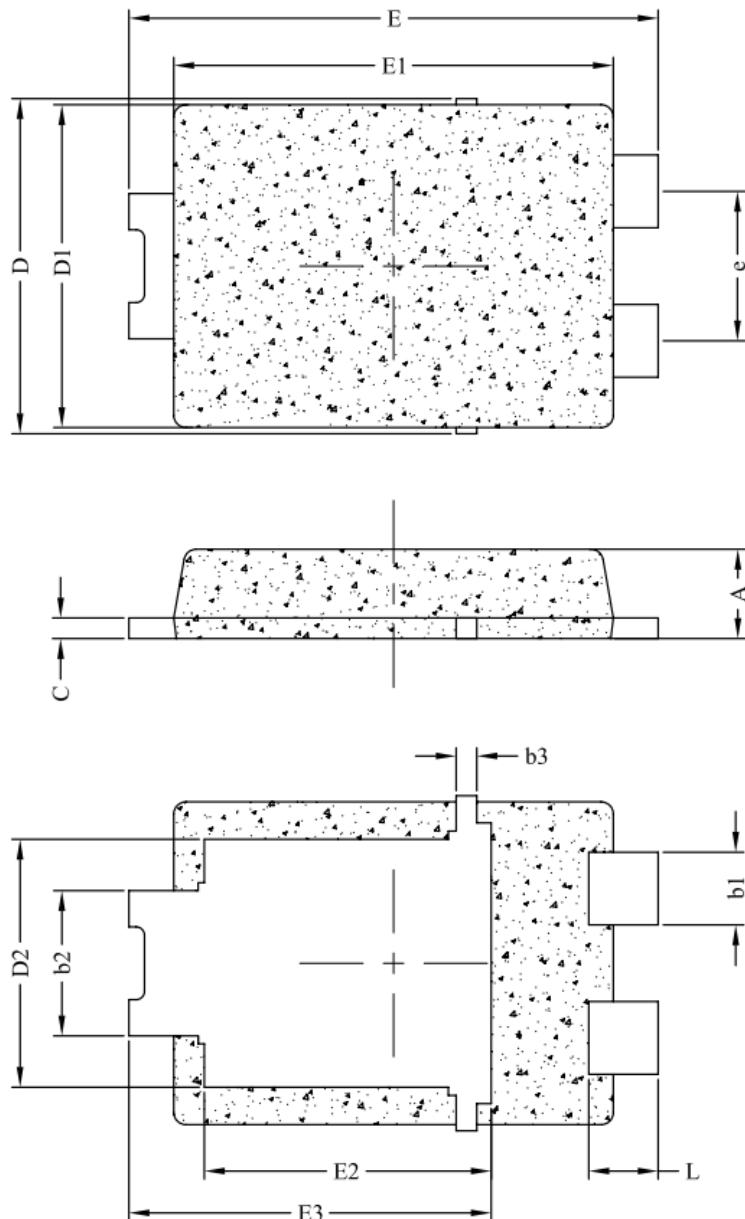
Order Information

Product	Marking	Package	Packaging	Min Unit Quantity
VSW10T45S	10T45	TO-277	5000/Reel	5000

Electronical Characteristic ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Breakdown Voltage	V_{BR}	$IR=0.5\text{mA}$		45	--	--	V
Forward Voltage	V_F	IF=3A	TA=25°C	--	0.38	0.4	V
			TA=125°C	--	0.31	0.33	V
		IF=5A	TA=25°C	--	0.41	0.44	V
			TA=125°C	--	0.35	0.38	V
		IF=10A	TA=25°C	--	0.46	0.50	V
			TA=125°C	--	0.40	0.45	V
Reverse Current	I_R	$VR=45\text{V}$		TA=25°C	--	36	200 μA
		TA=125°C		--	2.2	20	mA

Typical Characteristic

Fig1. Typical Forward Current Derating Curve

Fig2. Maximum Repetitive Surge Current

Fig3. Typical Reverse Current Characteristic

Fig4. Typical Forward Voltage Characteristic

TO277 Package Outline Data


Symbol	DIMENSIONS (unit : mm)		
	Min	Typ	Max
A	1.05	1.10	1.15
b1	0.80	0.90	0.99
b2	1.70	1.79	1.88
b3	0.15	0.25	0.35
C	0.20	0.25	0.33
D	4.00	4.20	4.30
D1	3.90	3.98	4.05
D2	2.95	3.05	3.15
E	6.40	6.50	6.60
E1	5.30	5.40	5.45
E2	3.45	3.55	3.65
E3	4.20	4.40	4.60
e	1.84 Typ		
L	0.75	0.85	0.95

Note:

- Dimension D1 and E1 do NOT include mold flash, mold flash shall not exceed 0.13mm per side.

Customer Service

Sales and Service:

sales@vgsemi.com

Vanguard Semiconductor CO., LTD

TEL: (86-755) -26902410

FAX: (86-755) -26907027