


WNM3003

N-Channel, 30V, 4.0A, Power MOSFET

[Http://www.willsemi.com](http://www.willsemi.com)


$V_{(BR)DSS}$	$R_{ds(on)}$ (Ω)
30V	0.033@ 10V
	0.033@ 10V
	0.043 @ 4.5V



SOT-23

Descriptions


The WNM3003 is N-Channel enhancement MOS Field Effect Transistor. Uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. This device is suitable for use in DC-DC conversion and power switch applications. Standard Product WNM3003 is Pb-free.



Configuration (Top View)

Features

- Trench Technology
- Supper high density cell design
- Excellent ON resistance for higher DC current
- Extremely Low Threshold Voltage
- Small package SOT-23



WT3 = Device Code
* = Month (A~Z)

Marking

Applications

- Driver for Relay, Solenoid, Motor, LED etc.
- DC-DC converter circuit
- Power Switch
- Load Switch
- Charging

Order Information

Device	Package	Shipping
WNM3003-3/TR	SOT-23	3000/Tape&Reel

Absolute Maximum ratings

Parameter		Symbol	10 S	Steady State	Unit
Drain-Source Voltage		V _{DS}	30		V
Gate-Source Voltage		V _{GS}	±20		
Continuous Drain Current ^a	T _A =25°C	I _D	4.0	3.7	A
	T _A =70°C		3.2	3.0	
Maximum Power Dissipation ^a	T _A =25°C	P _D	0.8	0.7	W
	T _A =70°C		0.5	0.4	
Continuous Drain Current ^b	T _A =25°C	I _D	3.7	3.4	A
	T _A =70°C		2.9	2.7	
Maximum Power Dissipation ^b	T _A =25°C	P _D	0.7	0.6	W
	T _A =70°C		0.4	0.3	
Pulsed Drain Current ^c		I _{DM}	10		A
Operating Junction Temperature		T _J	150		°C
Lead Temperature		T _L	260		°C
Storage Temperature Range		T _{stg}	-55 to 150		°C

Thermal resistance ratings

Parameter		Symbol	Typical	Maximum	Unit
Junction-to-Ambient Thermal Resistance ^a	$t \leq 10 \text{ s}$	$R_{\theta JA}$	120	145	$^{\circ}\text{C/W}$
	Steady State		132	168	
Junction-to-Ambient Thermal Resistance ^b	$t \leq 10 \text{ s}$	$R_{\theta JA}$	145	174	
	Steady State		158	202	
Junction-to-Case Thermal Resistance		$R_{\theta JC}$	60	75	

a Surface mounted on FR4 Board using 1 square inch pad size, 1oz copper

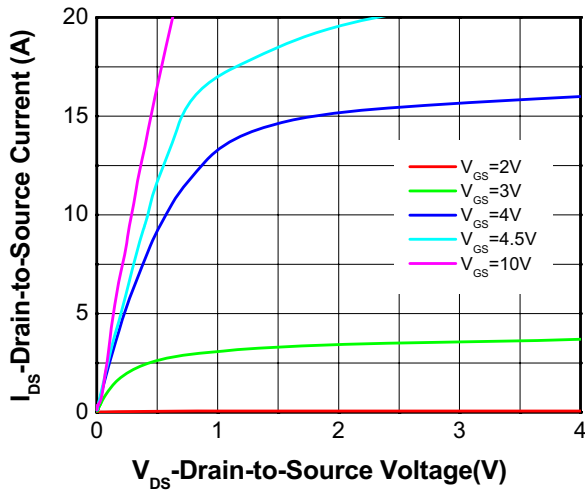
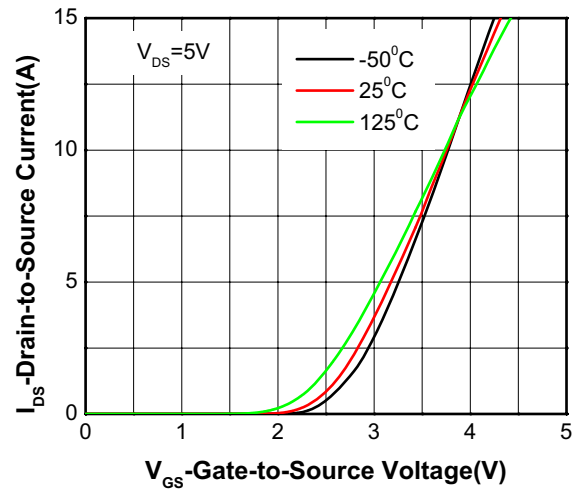
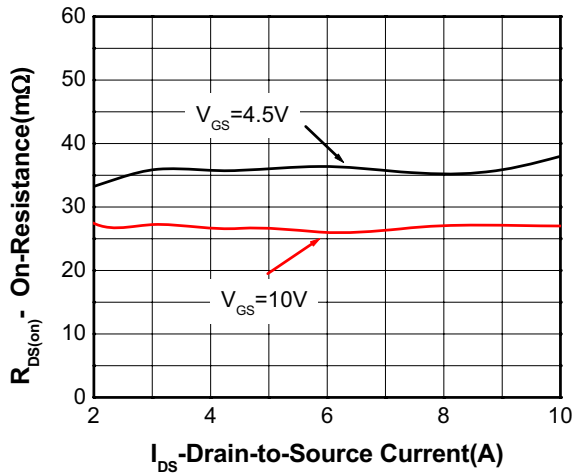
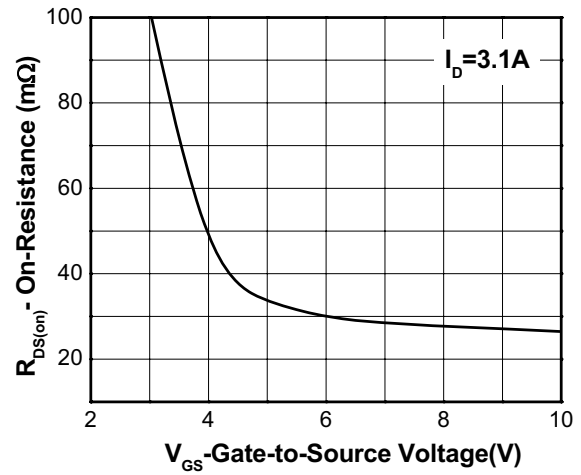
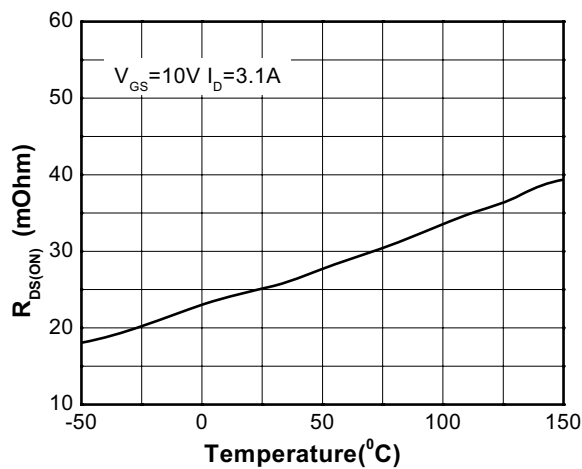
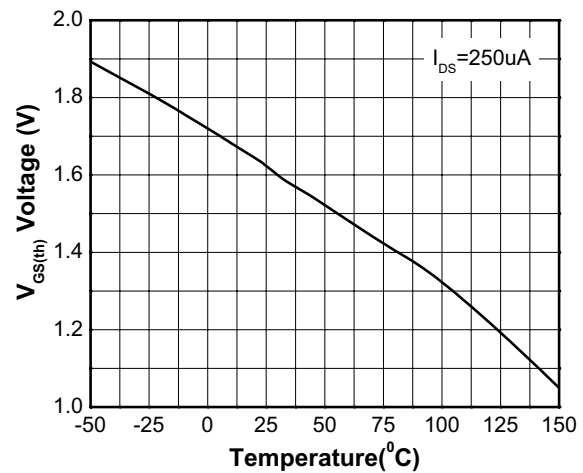
b Surface mounted on FR4 board using minimum pad size, 1oz copper

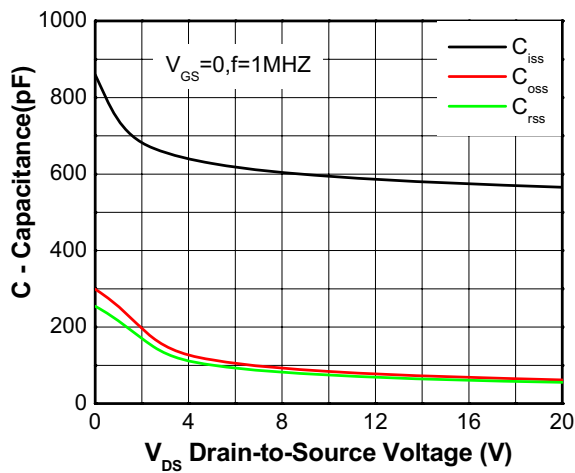
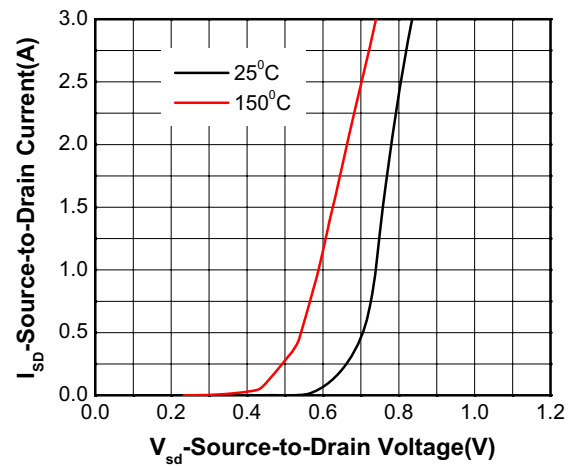
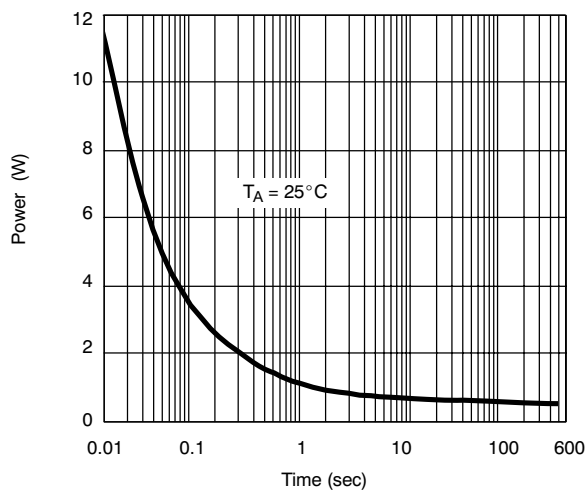
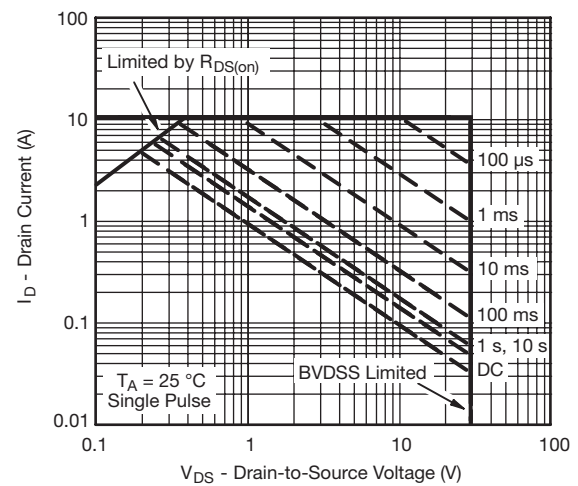
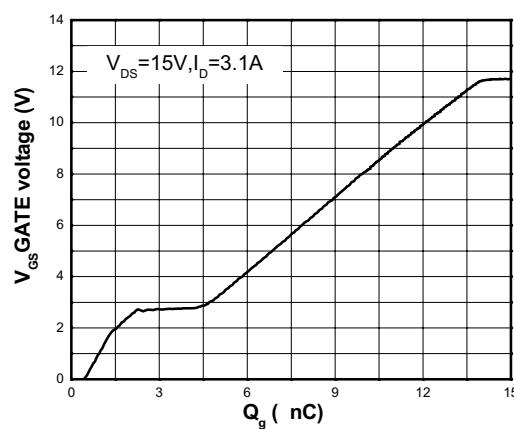
c Repetitive rating, pulse width limited by junction temperature, $t_p=10\mu\text{s}$, Duty Cycle=1%

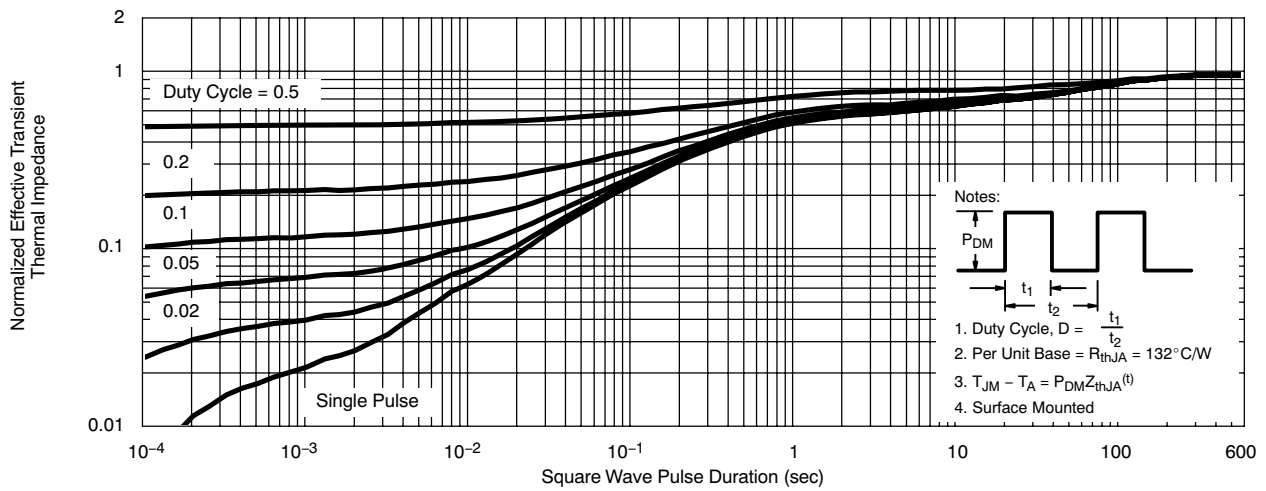
d Repetitive rating, pulse width limited by junction temperature $T_J=150^{\circ}\text{C}$.

Electronics Characteristics (Ta=25°C, unless otherwise noted)

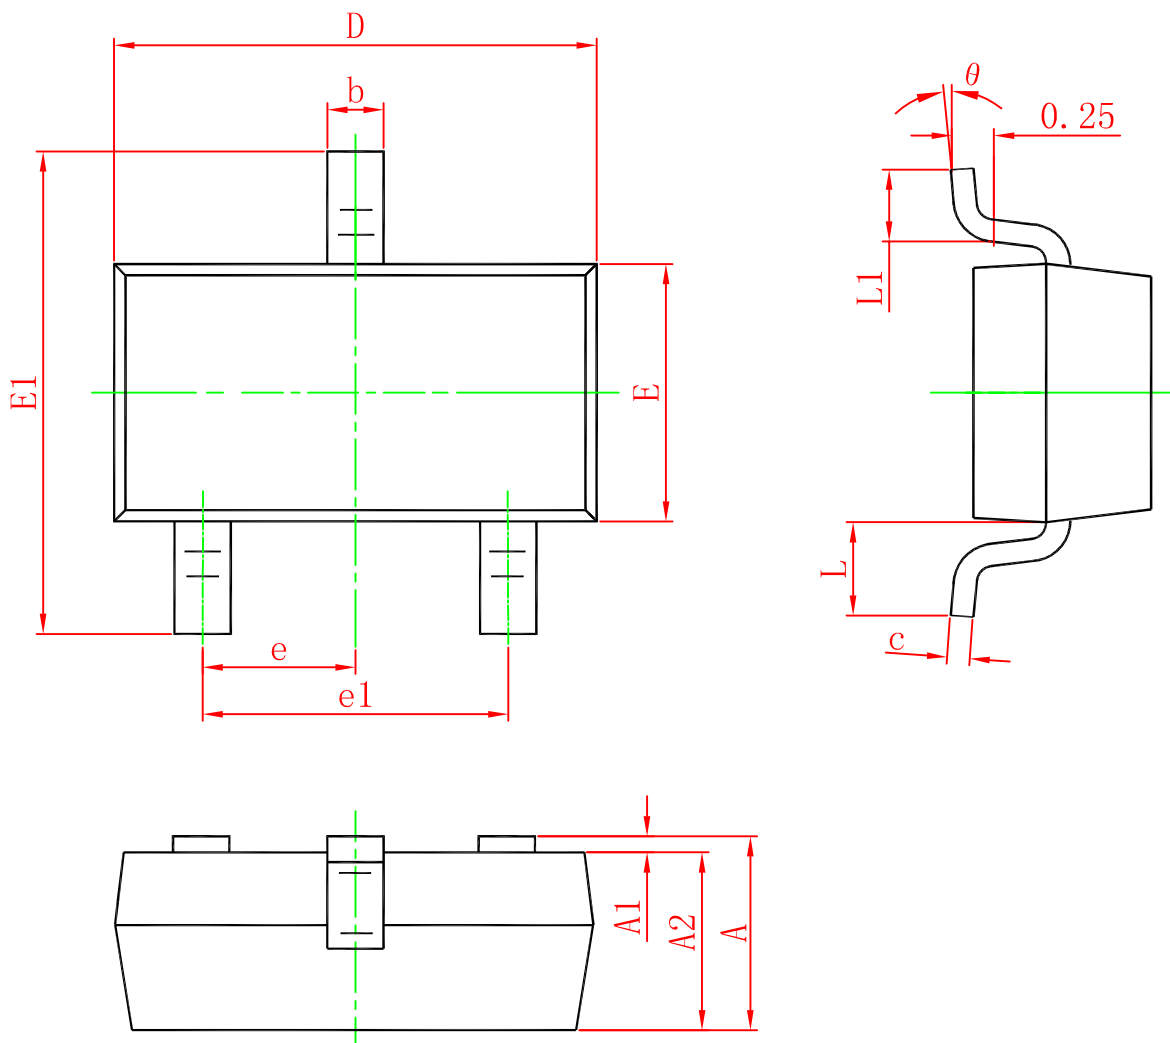
Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0 V, I _D = 250uA	30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =24 V, V _{GS} = 0V			1	uA
Gate-to-source Leakage Current	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20V			±100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{GS} = V _{DS} , I _D = 250uA	1.0	1.6	3.0	V
Drain-to-source On-resistance	R _{DS(on)}	V _{GS} = 10V, I _D = 3.1A		33	47	mΩ
		V _{GS} = 10V, I _D = 2.5A		33	47	
		V _{GS} = 4.5V, I _D = 2.0A		43	59	
Forward Transconductance	g _{FS}	V _{DS} = 4.5V, I _D = 2.8A		5.8		S
CHARGES, CAPACITANCES AND GATE RESISTANCE						
Input Capacitance	C _{ISS}	V _{GS} = 0 V, f = 1.0 MHz, V _{DS} = 15 V		570		pF
Output Capacitance	C _{OSS}			72		
Reverse Transfer Capacitance	C _{RSS}			64		
Total Gate Charge	Q _{G(TOT)}	V _{GS} =10 V, V _{DS} =15 V, I _D = 3.1A		11.6		nC
Threshold Gate Charge	Q _{G(TH)}			0.8		
Gate-to-Source Charge	Q _{GS}			1.25		
Gate-to-Drain Charge	Q _{GD}			3.0		
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	td(ON)	V _{GS} = 10 V, V _{DS} = 15 V, I _D =1A, R _G =6 Ω		5		ns
Rise Time	tr			3.3		
Turn-Off Delay Time	td(OFF)			39		
Fall Time	tf			4.4		
BODY DIODE CHARACTERISTICS						
Forward Voltage	V _{SD}	V _{GS} = 0 V, I _S = 1.5A	0.50	0.84	1.50	V

Typical Characteristics (Ta=25°C, unless otherwise noted)

Output characteristics

Transfer characteristics

On-Resistance vs. Drain current

On-Resistance vs. Gate-to-Source voltage

On-Resistance vs. Junction temperature

Threshold voltage vs. Temperature


Capacitance

Body diode forward voltage

Single pulse power

Safe operating area

Gate Charge Characteristics



Transient thermal response (Junction-to-Ambient)

Package Outline Dimension
SOT-23


Symbol	Dimensions In Millimeters	
	Min.	Max.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950 (Typ.)	
e1	1.800	2.000
L	0.550 (Typ.)	
L1	0.300	0.500
θ	0°	8°