



# SAW Components

Data Sheet X 6965 M





## SAW Components

X 6965 M

## Bandpass Filter

44,00 MHz

### Data Sheet


Plastic package **SIP5K**

### Features

- IF filter for digital cable TV

### Terminals


- Tinned CuFe alloy

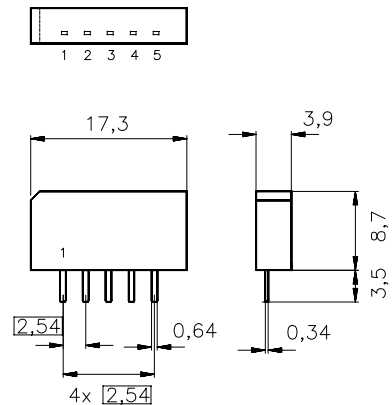

Dimensions in mm, approx. weight 1,0 g

### Pin configuration

- |   |                       |
|---|-----------------------|
| 1 | Input                 |
| 2 | Input - ground        |
| 3 | Chip carrier - ground |
| 4 | Output                |
| 5 | Output                |

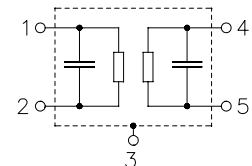

Type	Ordering code	Marking and package according to	Packing according to
X 6965 M	B39440-X6965-M100	C61157-A1-A15	F61074-V8067-Z000

### Maximum ratings

Operable temperature range	$T_A$	-25/+65	°C	
Storage temperature range	$T_{stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	12	V	between any terminals
AC voltage	$V_{pp}$	10	V	between any terminals



<b>SAW Components</b>	<b>X 6965 M</b>
<b>Bandpass Filter</b>	<b>44,00 MHz</b>

## Data Sheet

### Characteristics

Reference temperature:	$T_A = 25 (45) ^\circ \text{C}$
Terminating source impedance:	$Z_S = 50 \Omega$
Terminating load impedance:	$Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF}$

		min.	typ.	max.	
<b>Center frequency</b>	$f_C$	—	44,00	—	MHz
(center between 3 dB points)					
<b>Insertion attenuation</b>	$\alpha$				
Reference level for the following data	44,06 (44,00) MHz	12,9	14,4	15,9	dB
<b>Pass bandwidth</b>					
$\alpha_{\text{rel}} \leq 3 \text{ dB}$	$B_{3\text{dB}}$	—	6,0	—	MHz
$\alpha_{\text{rel}} \leq 30 \text{ dB}$	$B_{30\text{dB}}$	—	7,6	—	MHz
<b>Amplitude ripple</b>	$\Delta\alpha$				
Aperture: 250 kHz	41,53 ... 46,59 MHz	—	0,4	0,8	dB
<b>Relative attenuation</b>	$\alpha_{\text{rel}}$				
	41,53 (41,47) MHz	—	0,4	—	dB
	46,59 (46,53) MHz	—	0,4	—	dB
	41,06 (41,00) MHz	1,8	3,0	4,2	dB
	47,06 (47,00) MHz	1,5	2,7	3,9	dB
	47,31 (47,25) MHz	—	6,2	—	dB
	39,81 (39,75) MHz	40,0	52,0	—	dB
<b>Lower sidelobe</b>					
	35,06 ... 39,46 (35,00 ... 39,40) MHz	44,0	50,0	—	dB
	39,46 ... 40,06 (39,40 ... 40,00) MHz	38,0	44,0	—	dB
<b>Upper sidelobe</b>					
	48,06 ... 50,06 (48,00 ... 50,00) MHz	36,0	43,0	—	dB
	50,06 ... 55,06 (50,00 ... 55,00) MHz	42,0	48,0	—	dB
<b>Reflected wave signal suppression</b>					
1,3 $\mu\text{s}$ ... 6,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 44,06 MHz)		42,0	52,0	—	dB
<b>Feedthrough signal suppression</b>					
1,3 $\mu\text{s}$ ... 1,2 $\mu\text{s}$ before main pulse (test pulse 250 ns, carrier frequency 44,06 MHz)		50,0	56,0	—	dB
<b>Group delay ripple (p-p)</b>	$\Delta\tau$				
Aperture 250 kHz	41,53 ... 46,59 MHz	—	20	40	ns
<b>Impedance at 44,06 MHz</b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1,3 $\parallel$ 16,1	—	k $\Omega$ $\parallel$ pF
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1,1 $\parallel$ 5,6	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K



SAW Components



X 6965 M

Bandpass Filter

44,00 MHz

Data Sheet

Frequency response

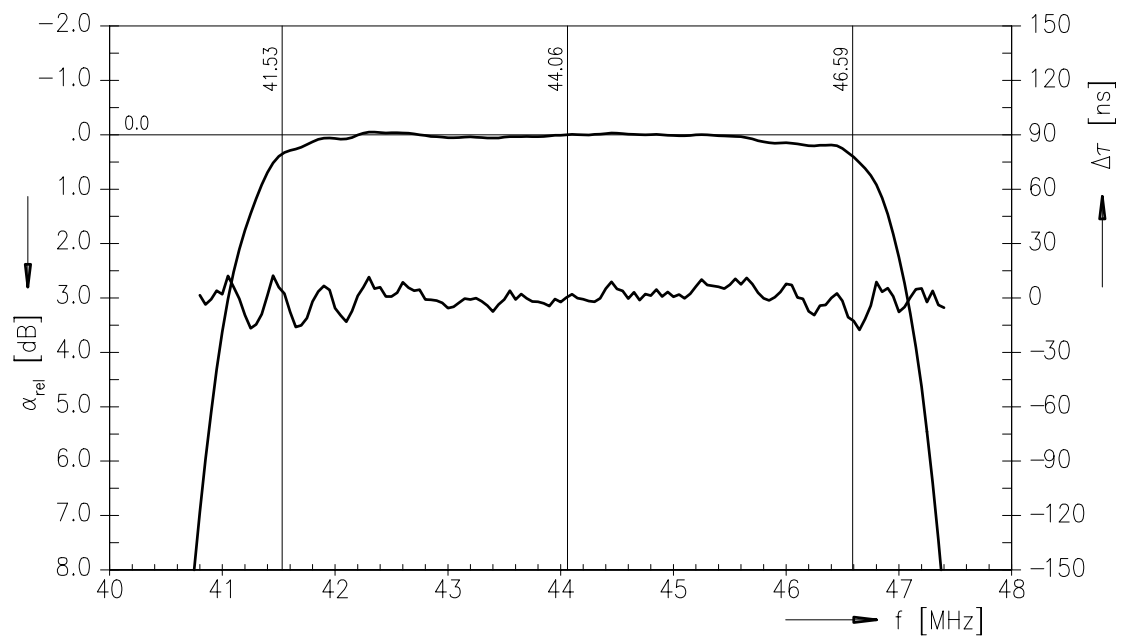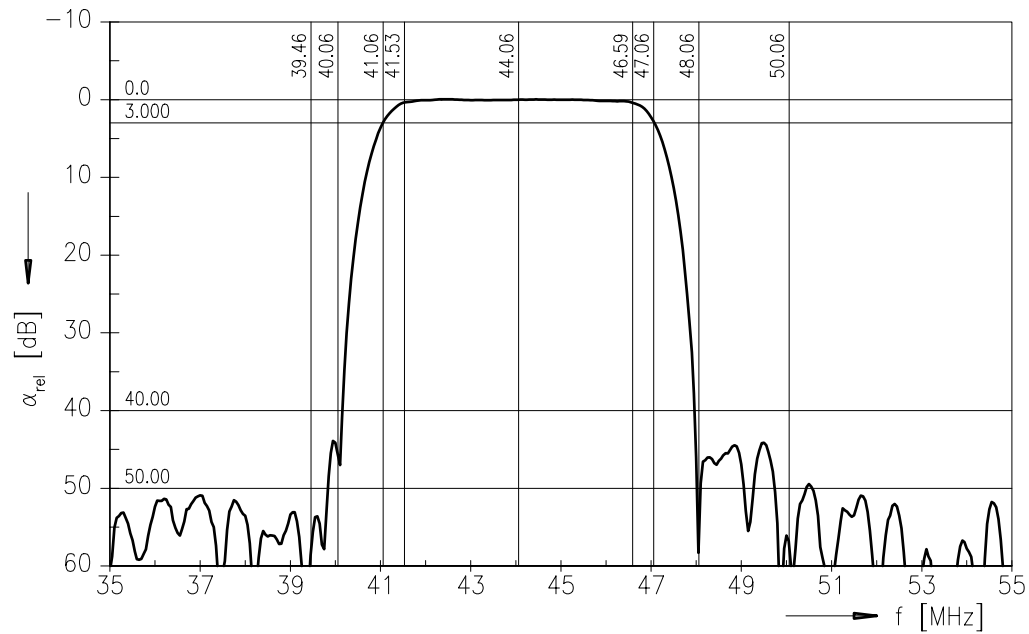



SAW Components


X 6965 M

Bandpass Filter


44,00 MHz

## Data Sheet

### Frequency response

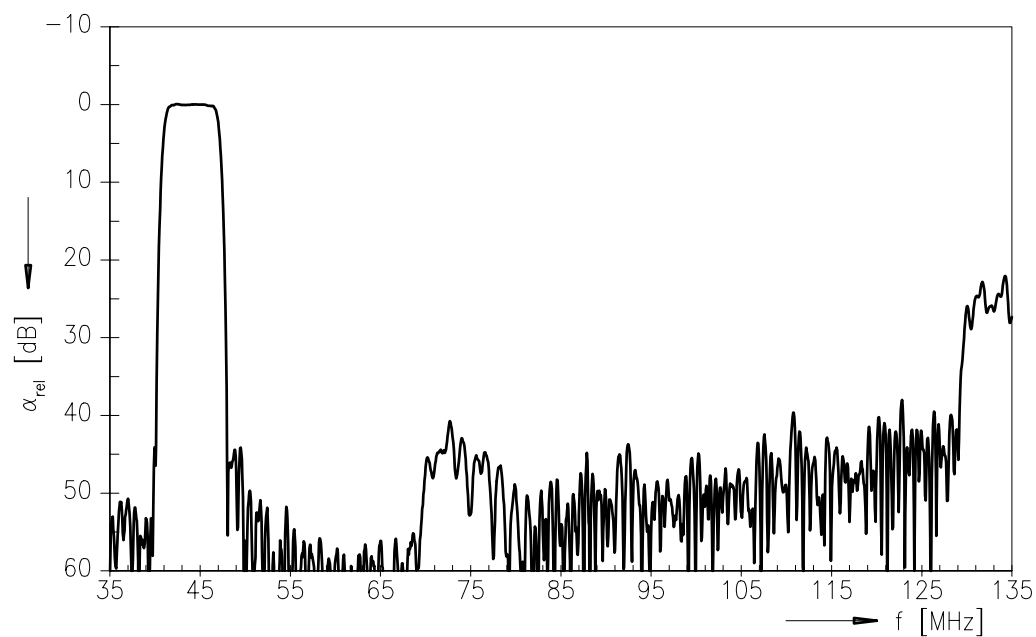

### Time domain response

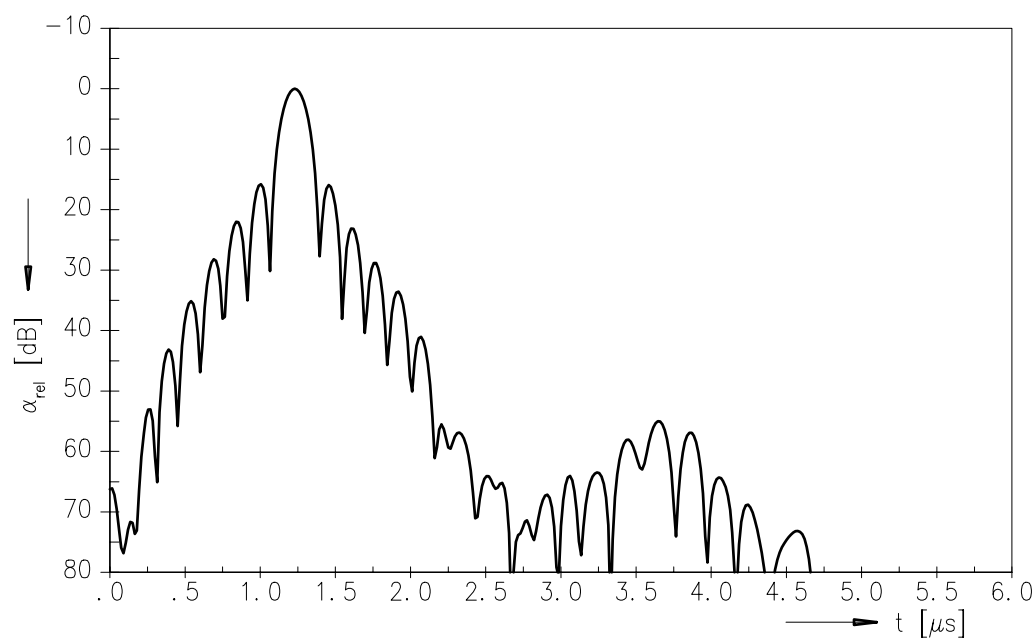



<b>SAW Components</b>	<b>X 6965 M</b>
<b>Bandpass Filter</b>	<b>44,00 MHz</b>

## Data Sheet

### **Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW CE MM PD**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.