



1. Mechanical Dimensions:

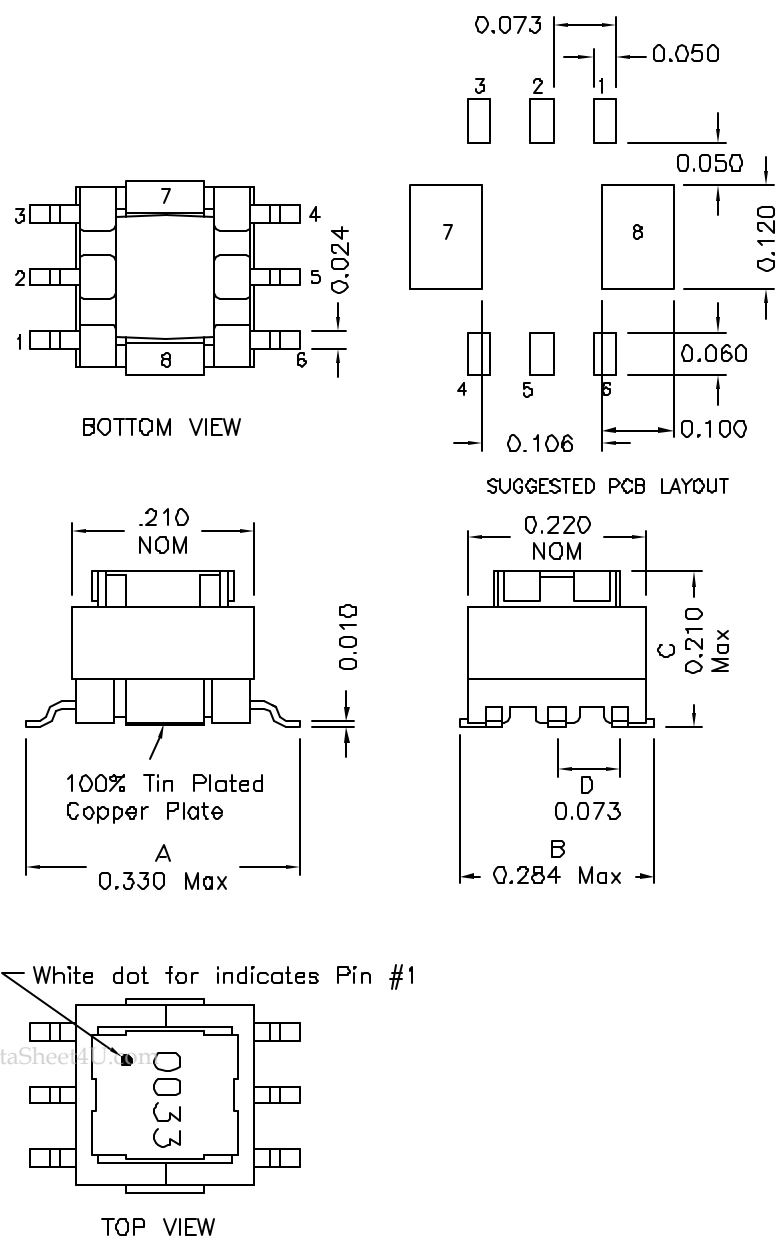

2. Schematic:

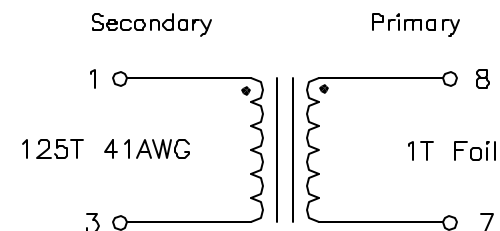

3. Electrical Specifications:

OCL: Pins 1-3 3000uH Min @100KHz 0.1V (-20 to +85°C)
Pins 1-3 2800uH Min @100KHz 0.1V (-40°C to -20°C)
Q: Pins 1-3 10 Min @10KHz 0.1V
DCR: Pins 1-3 6.50 Ohms Max.
Hipot: 500Vac, Pri to Sec
Terminating Resistor: 20.83 Ohms for 1Vout
Turns Ratio: Pins (1-3):(8-7)=125:1

Notes:

1. Solderability: Leads shall meet MIL-STD-202G.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151558
5. All listed parameters are to be within tolerance from -40C to +85C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: $\pm 0.004^\circ$ (D.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

XFMRS Inc
www.XFMRS.com

Model:
Current Sense Xfmr

Unless Otherwise Specified

P/N: XF0033-EE5CS

REV. A

TOLERANCES:

.xxx ± 0.010

Dimensions in INCH

DWN.

Xianyi

Sep-23-09

CHK.

YK Liao

Sep-23-09

APP.

Joe Huff

Sep-23-09

SHEET 1 OF 1

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

DOC. REV. A/4