



- ▼ 100% R_g & UIS Test
- ▼ Simple Drive Requirement
- ▼ Fast Switching Characteristic
- ▼ RoHS Compliant & Halogen-Free
- ▼ AEC Qualified



BV _{DSS}	40V
R _{DS(ON)}	3.8mΩ



Description

XP4NA3R8 series are innovated design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The TO-252 package is widely preferred for all commercial-industrial surface mount applications using infrared reflow technique and suited for high current application due to the low connection resistance.

Absolute Maximum Ratings@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	40	V
V _{GS}	Gate-Source Voltage	+20	V
I _D @T _C =25°C	Drain Current, V _{GS} @ 10V ⁴ (Silicon Limited)	102	A
I _D @T _C =25°C	Drain Current, V _{GS} @ 10V ⁴	75	A
I _D @T _C =100°C	Drain Current, V _{GS} @ 10V	72.5	A
I _{DM}	Pulsed Drain Current ¹	300	A
P _D @T _C =25°C	Total Power Dissipation	75	W
P _D @T _A =25°C	Total Power Dissipation ⁵	2.4	W
E _{AS}	Single Pulse Avalanche Energy ³	101	mJ
T _{STG}	Storage Temperature Range	-55 to 175	°C
T _J	Operating Junction Temperature Range	-55 to 175	°C

Thermal Data

Symbol	Parameter	Value	Units
R _{thj-c}	Maximum Thermal Resistance, Junction-case	2	°C/W
R _{thj-a}	Maximum Thermal Resistance, Junction-ambient (PCB mount) ⁵	62.5	°C/W

Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	40	-	-	V
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V _{GS} =10V, I _D =40A	-	-	3.8	mΩ
		V _{GS} =4.5V, I _D =30A	-	-	5.4	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	1.3	-	3	V
g _{fs}	Forward Transconductance	V _{DS} =5V, I _D =40A	-	150	-	S
I _{DSS}	Drain-Source Leakage Current	V _{DS} =32V, V _{GS} =0V	-	-	10	uA
I _{GSS}	Gate-Source Leakage	V _{GS} = ±20V, V _{DS} =0V	-	-	±0.1	uA
Q _g	Total Gate Charge ⁶	I _D =40A	-	88	140.8	nC
Q _{gs}	Gate-Source Charge ⁶	V _{DS} =32V	-	15	-	nC
Q _{gd}	Gate-Drain ("Miller") Charge ⁶	V _{GS} =10V	-	22	-	nC
t _{d(on)}	Turn-on Delay Time ⁶	V _{DS} =20V	-	15	-	ns
t _r	Rise Time ⁶	I _D =40A	-	52	-	ns
t _{d(off)}	Turn-off Delay Time ⁶	R _G =6 Ω	-	78	-	ns
t _f	Fall Time ⁶	V _{GS} =10V	-	120	-	ns
C _{iss}	Input Capacitance ⁶	V _{GS} =0V	-	4480	7168	pF
C _{oss}	Output Capacitance ⁶	V _{DS} =30V	-	420	-	pF
C _{rss}	Reverse Transfer Capacitance ⁶	f=1.0MHz	-	260	-	pF
R _g	Gate Resistance	f=1.0MHz	-	0.8	1.6	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V _{SD}	Forward On Voltage ²	I _S =40A, V _{GS} =0V	-	-	1.2	V
t _{rr}	Reverse Recovery Time ⁶	I _S =40A, V _{GS} =0V,	-	18	-	ns
Q _{rr}	Reverse Recovery Charge ⁶	dI/dt=100A/μs	-	9	-	nC

Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Starting T_j=25°C , V_{DD}=30V , L=0.1mH , R_G=25Ω , V_{GS}=10V
- 4.Package limitation current is 75A .
- 5.Surface mounted on 1 in² copper pad of FR4 board
- 6.Defined by design. Not subject to production test.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

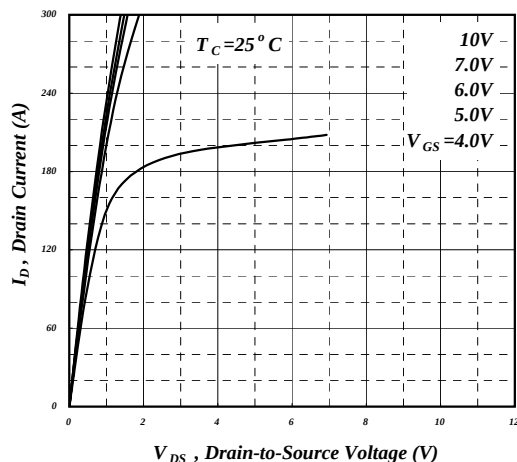


Fig 1. Typical Output Characteristics

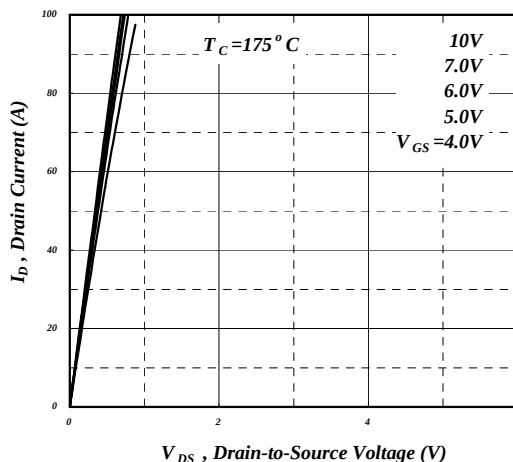


Fig 2. Typical Output Characteristics

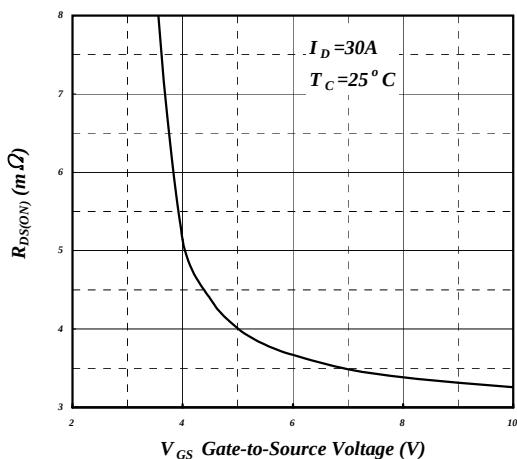


Fig 3. On-Resistance v.s. Gate Voltage

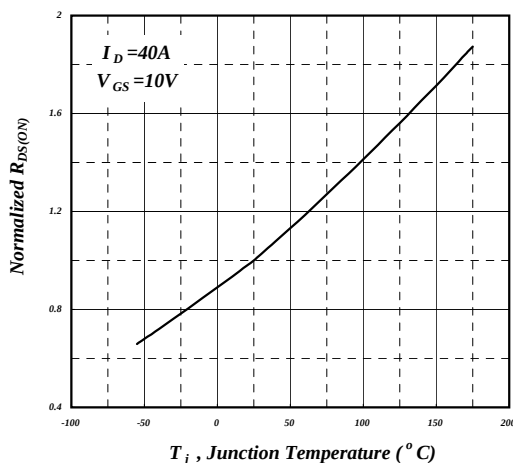


Fig 4. Normalized On-Resistance v.s. Junction Temperature

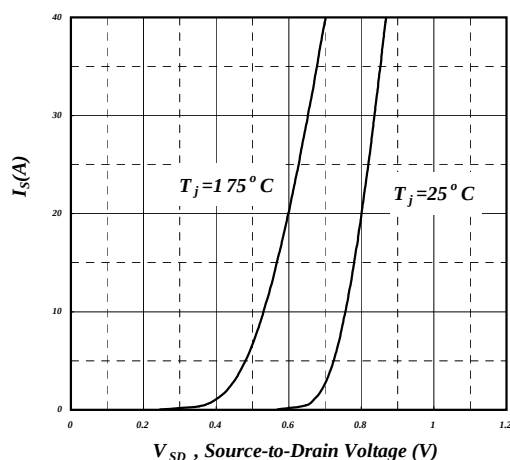


Fig 5. Forward Characteristic of Reverse Diode

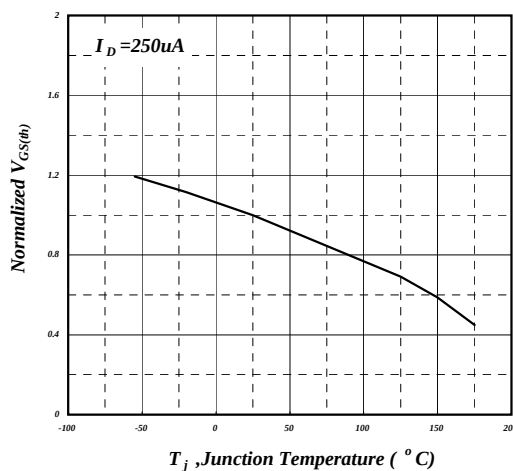


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

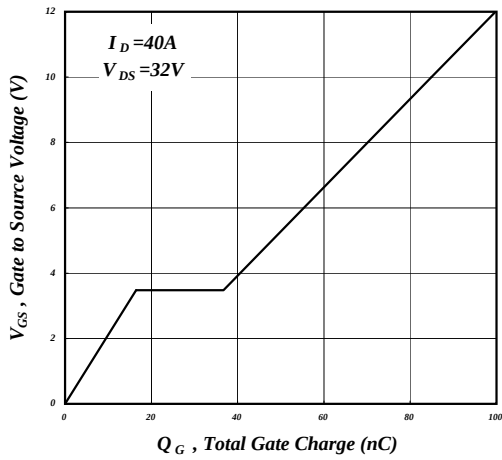


Fig 7. Gate Charge Characteristics

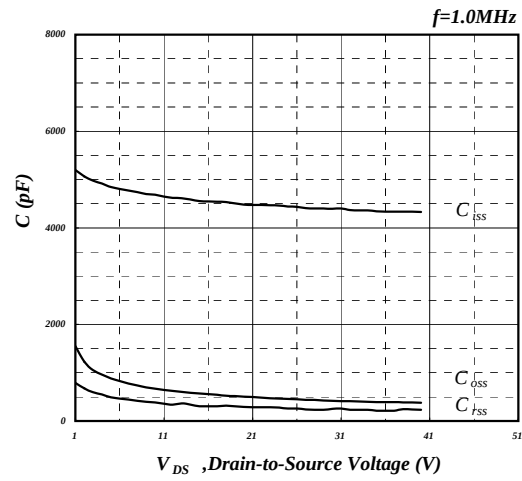


Fig 8. Typical Capacitance Characteristics

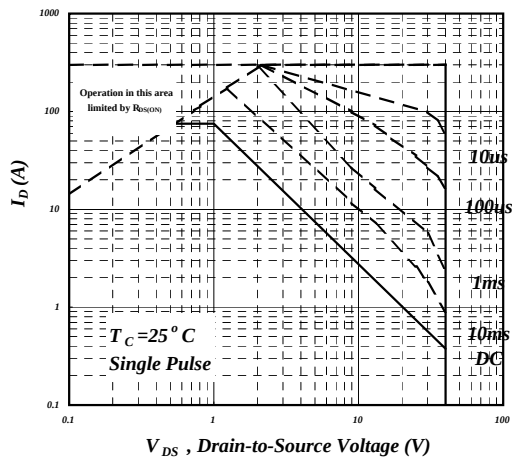


Fig 9. Maximum Safe Operating Area

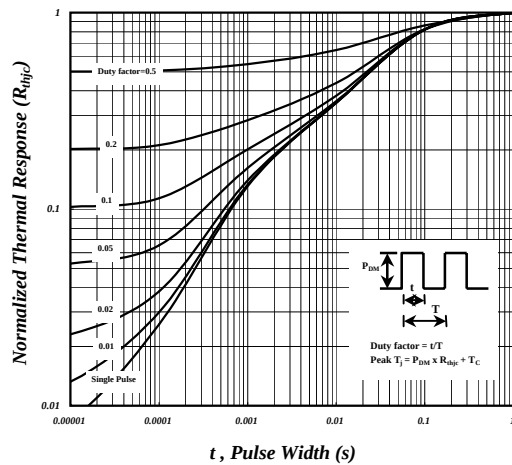


Fig 10. Effective Transient Thermal Impedance

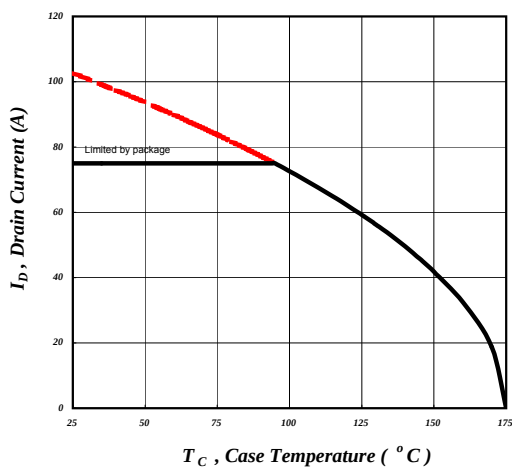


Fig 11. Drain Current v.s. Case Temperature







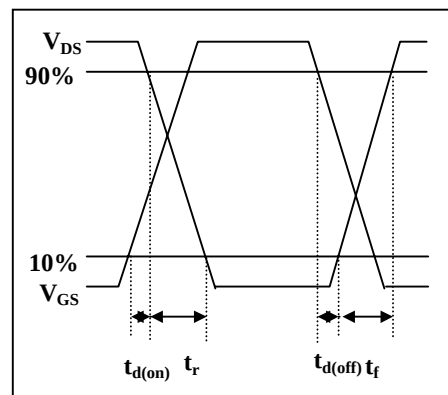


Fig 12. Switching Time Waveform

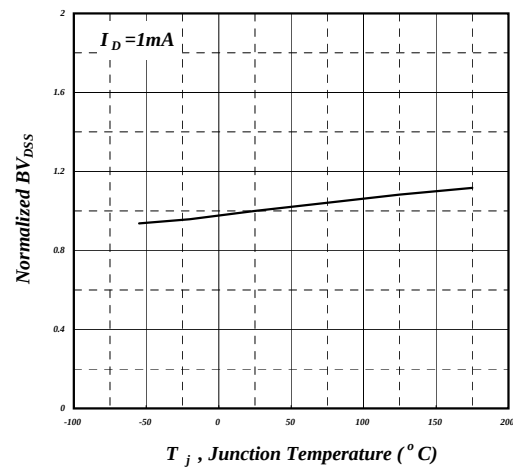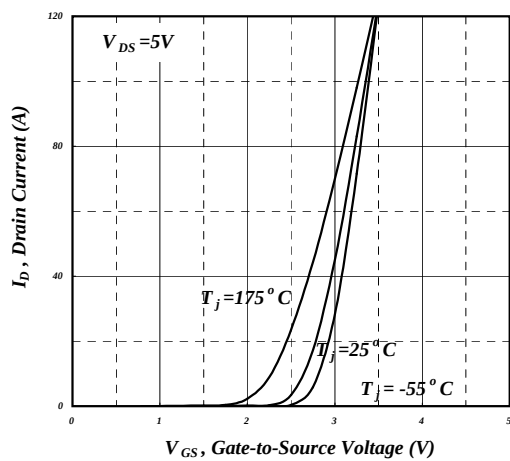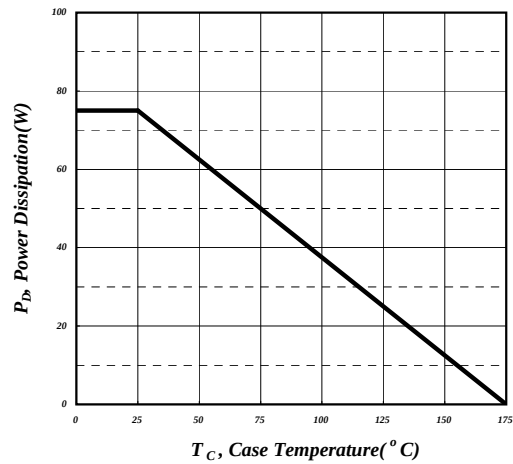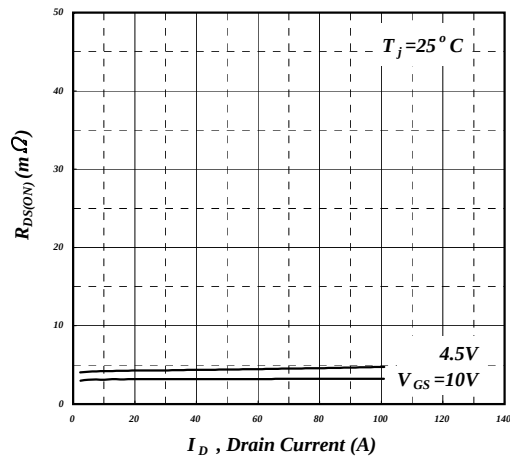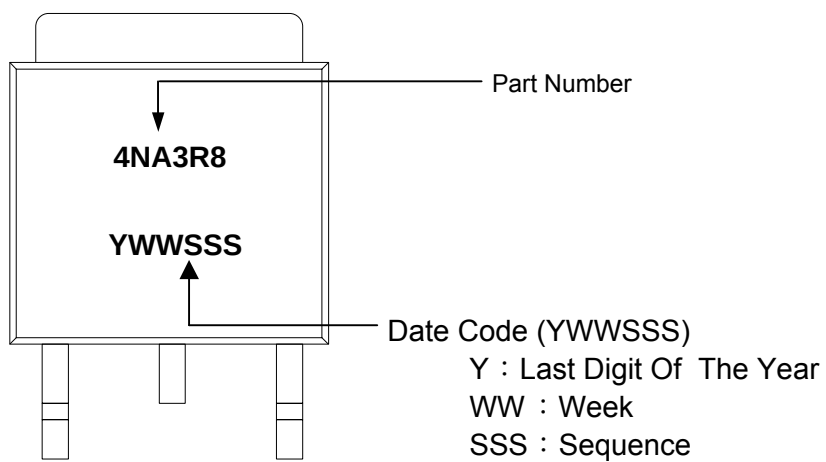


MARKING INFORMATION

Package Outline : TO-252

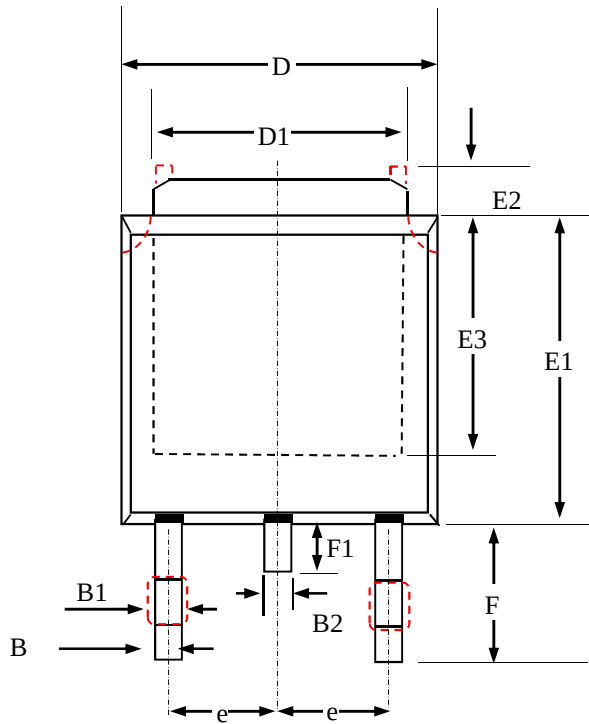

SYMBOLS	Millimeters		
	MIN	NOM	MAX
A2	2.18	2.30	2.40
A3	0.40	0.50	0.65
B	0.40	0.70	1.00
B1	0.50	0.85	1.20
D	6.00	6.50	6.80
D1	4.80	5.35	5.90
E3	4.00 (ref.)		
F	2.00	2.63	3.05
F1	0.50	0.85	1.20
E1	5.00	5.70	6.30
E2	0.50	1.10	1.80
e	2.3 (ref)		
C	0.35	0.525	0.70
A1	0.00	—	0.25
B2	—	—	1.25
L	0.90	1.34	1.78

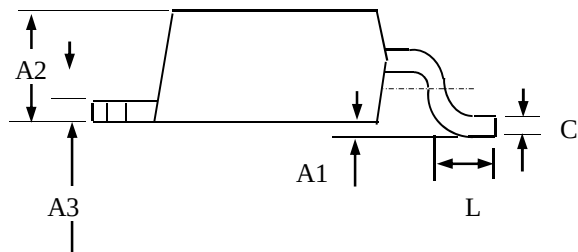

- 1.All Dimensions Are in Millimeters.
- 2.Dimension Does Not Include Mold Protrusions.
3. Thermal PAD, Body and Pin contour is for reference, it may has little difference by option.

TO-252 FOOTPRINT :

