



- ▼ 100%  $R_g$  & UIS Test
- ▼ Low  $t_{rr}$  /  $Q_{rr}$
- ▼ Simple Drive Requirement
- ▼ RoHS Compliant & Halogen-Free



|              |                |
|--------------|----------------|
| $BV_{DSS}$   | 650V           |
| $R_{DS(ON)}$ | $0.19\ \Omega$ |
| $I_D^3$      | 18.2A          |



## Description

XP65SE190D series are innovated design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The TO-252 package is widely preferred for commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

## Absolute Maximum Ratings@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

| Symbol                      | Parameter                                             | Rating     | Units            |
|-----------------------------|-------------------------------------------------------|------------|------------------|
| $V_{DS}$                    | Drain-Source Voltage                                  | 650        | V                |
| $V_{GS}$                    | Gate-Source Voltage                                   | $\pm 20$   | V                |
| $V_{GS}$                    | Gate-Source Voltage, AC ( $f > 1\text{Hz}$ )          | $\pm 30$   | V                |
| $I_D@T_C=25^\circ\text{C}$  | Drain Current, $V_{GS}$ @ $10V^3$                     | 18.2       | A                |
| $I_D@T_C=100^\circ\text{C}$ | Drain Current, $V_{GS}$ @ $10V^3$                     | 11.5       | A                |
| $I_{DM}$                    | Pulsed Drain Current <sup>1</sup>                     | 44         | A                |
| $dv/dt$                     | MOSFET $dv/dt$ Ruggedness ( $V_{DS} = 0 \dots 480V$ ) | 20         | V/ns             |
| $P_D@T_C=25^\circ\text{C}$  | Total Power Dissipation                               | 78.1       | W                |
| $P_D@T_A=25^\circ\text{C}$  | Total Power Dissipation <sup>6</sup>                  | 2          | W                |
| $E_{AS}$                    | Single Pulse Avalanche Energy <sup>4</sup>            | 200        | mJ               |
| $dv/dt$                     | Peak Diode Recovery $dv/dt^5$                         | 15         | V/ns             |
| $T_{STG}$                   | Storage Temperature Range                             | -55 to 150 | $^\circ\text{C}$ |
| $T_j$                       | Operating Junction Temperature Range                  | -55 to 150 | $^\circ\text{C}$ |

## Thermal Data

| Symbol      | Parameter                                                             | Value | Units                     |
|-------------|-----------------------------------------------------------------------|-------|---------------------------|
| $R_{thj-c}$ | Maximum Thermal Resistance, Junction-case                             | 1.6   | $^\circ\text{C}/\text{W}$ |
| $R_{thj-a}$ | Maximum Thermal Resistance, Junction-ambient (PCB mount) <sup>6</sup> | 62.5  | $^\circ\text{C}/\text{W}$ |

**Electrical Characteristics@T<sub>j</sub>=25°C(unless otherwise specified)**

| Symbol              | Parameter                                      | Test Conditions                                          | Min. | Typ. | Max. | Units |
|---------------------|------------------------------------------------|----------------------------------------------------------|------|------|------|-------|
| BV <sub>DSS</sub>   | Drain-Source Breakdown Voltage                 | V <sub>GS</sub> =0V, I <sub>D</sub> =1mA                 | 650  | -    | -    | V     |
| R <sub>DS(ON)</sub> | Static Drain-Source On-Resistance <sup>2</sup> | V <sub>GS</sub> =10V, I <sub>D</sub> =5A                 | -    | -    | 0.19 | Ω     |
| V <sub>GS(th)</sub> | Gate Threshold Voltage                         | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250uA | 2.5  | -    | 4.5  | V     |
| g <sub>fs</sub>     | Forward Transconductance                       | V <sub>DS</sub> =10V, I <sub>D</sub> =5A                 | -    | 14   | -    | S     |
| I <sub>DSS</sub>    | Drain-Source Leakage Current                   | V <sub>DS</sub> =520V, V <sub>GS</sub> =0V               | -    | -    | 100  | uA    |
| I <sub>GSS</sub>    | Gate-Source Leakage                            | V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V               | -    | -    | ±1   | uA    |
| Q <sub>g</sub>      | Total Gate Charge <sup>7</sup>                 | I <sub>D</sub> =5A                                       | -    | 47   | 75.2 | nC    |
| Q <sub>gs</sub>     | Gate-Source Charge <sup>7</sup>                | V <sub>DS</sub> =520V                                    | -    | 12   | -    | nC    |
| Q <sub>gd</sub>     | Gate-Drain ("Miller") Charge <sup>7</sup>      | V <sub>GS</sub> =10V                                     | -    | 13   | -    | nC    |
| t <sub>d(on)</sub>  | Turn-on Delay Time <sup>7</sup>                | V <sub>DD</sub> =325V                                    | -    | 16   | -    | ns    |
| t <sub>r</sub>      | Rise Time <sup>7</sup>                         | I <sub>D</sub> =5A                                       | -    | 11   | -    | ns    |
| t <sub>d(off)</sub> | Turn-off Delay Time <sup>7</sup>               | R <sub>G</sub> =3.3Ω                                     | -    | 60   | -    | ns    |
| t <sub>f</sub>      | Fall Time <sup>7</sup>                         | V <sub>GS</sub> =10V                                     | -    | 15   | -    | ns    |
| C <sub>iss</sub>    | Input Capacitance <sup>7</sup>                 | V <sub>GS</sub> =0V                                      | -    | 2200 | 3520 | pF    |
| C <sub>oss</sub>    | Output Capacitance <sup>7</sup>                | V <sub>DS</sub> =100V                                    | -    | 42   | -    | pF    |
| C <sub>rss</sub>    | Reverse Transfer Capacitance <sup>7</sup>      | f=1.0MHz                                                 | -    | 10   | -    | pF    |
| R <sub>g</sub>      | Gate Resistance                                | f=1.0MHz                                                 | -    | 4.5  | 9    | Ω     |

**Source-Drain Diode**

| Symbol          | Parameter                            | Test Conditions                         | Min. | Typ. | Max. | Units |
|-----------------|--------------------------------------|-----------------------------------------|------|------|------|-------|
| V <sub>SD</sub> | Forward On Voltage <sup>2</sup>      | I <sub>S</sub> =5A, V <sub>GS</sub> =0V | -    | 0.8  | 1.5  | V     |
| t <sub>rr</sub> | Reverse Recovery Time <sup>7</sup>   | I <sub>S</sub> =2A, V <sub>GS</sub> =0V | -    | 100  | -    | ns    |
| Q <sub>rr</sub> | Reverse Recovery Charge <sup>7</sup> | di/dt=100A/μs                           | -    | 430  | -    | nC    |

**Notes:**


- 1.Pulse width limited by max. junction temperature.
- 2.Pulse test
- 3.Limited by max. junction temperature. Maximum duty cycle D=0.5
- 4.Starting T<sub>j</sub>=25°C , V<sub>DD</sub>=90V , L=100mH , R<sub>G</sub>=25Ω , V<sub>GS</sub>=10V.
- 5.I<sub>SD</sub> ≤ I<sub>D</sub>, V<sub>DD</sub> ≤ BV<sub>DSS</sub>, starting T<sub>j</sub> = 25°C
- 6.Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board
- 7.Guaranteed by design.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.


USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT, AUTOMOTIVE OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

XSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.


XSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

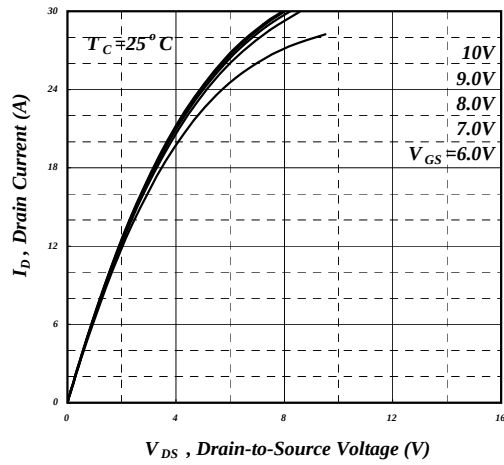


**Fig 1. Typical Output Characteristics**

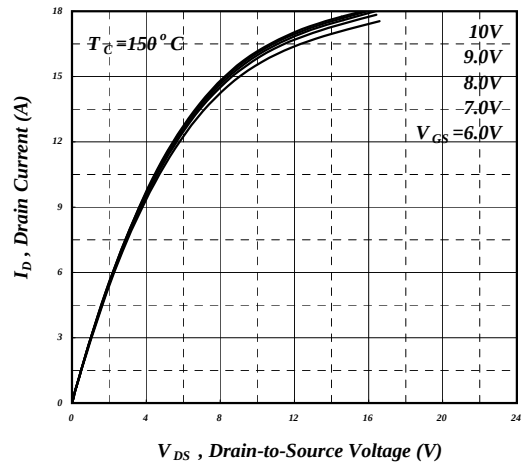


**Fig 2. Typical Output Characteristics**

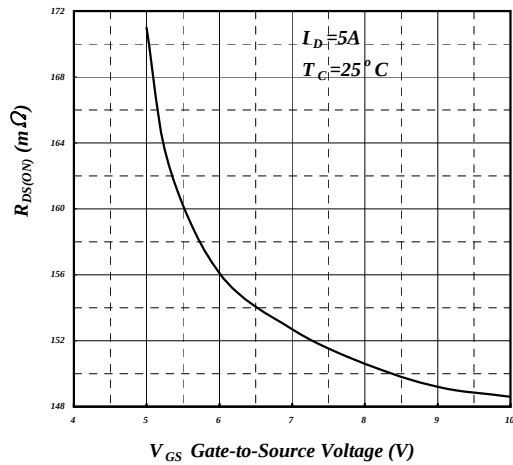


**Fig 3. On-Resistance v.s. Gate Voltage**

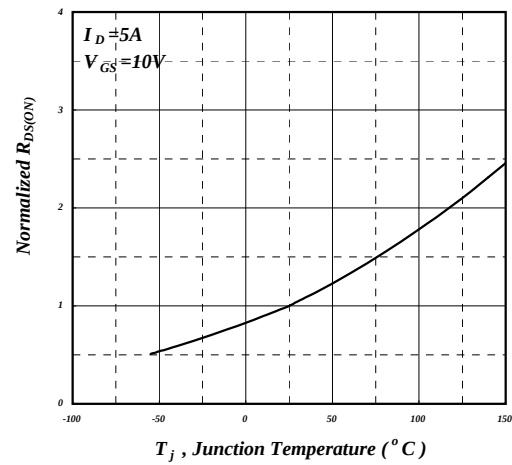


**Fig 4. Normalized On-Resistance  
v.s. Junction Temperature**

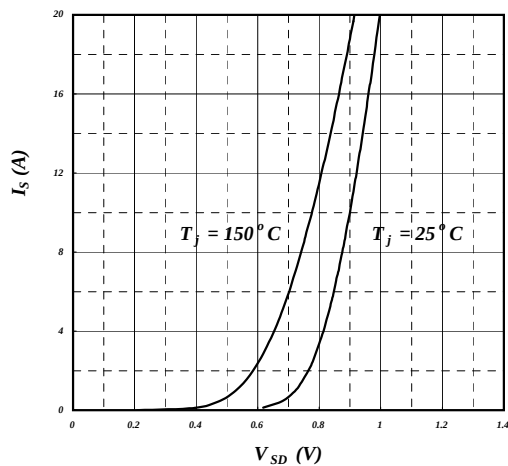


**Fig 5. Forward Characteristic of  
Reverse Diode**

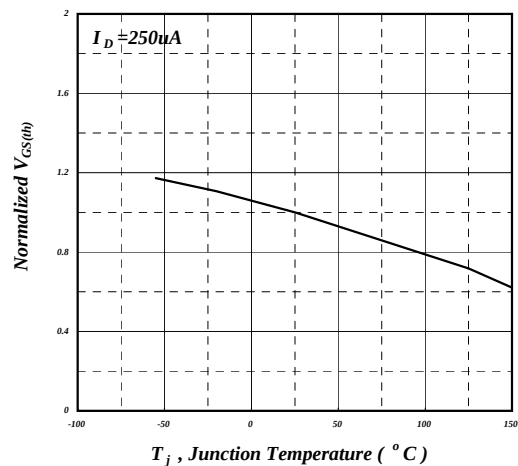


**Fig 6. Gate Threshold Voltage v.s.  
Junction Temperature**

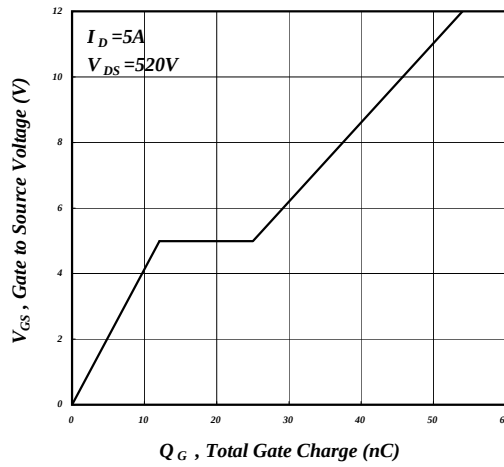


**Fig 7. Gate Charge Characteristics**

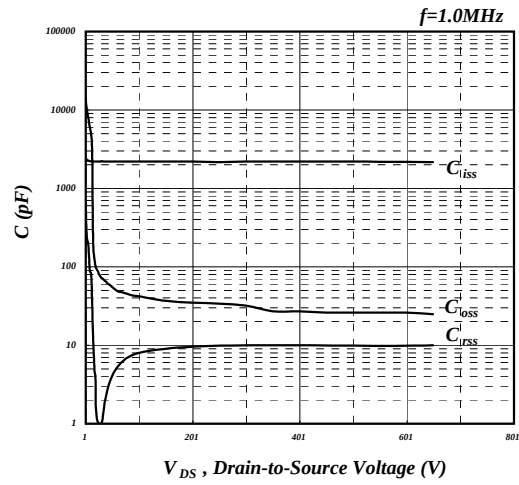


**Fig 8. Typical Capacitance Characteristics**

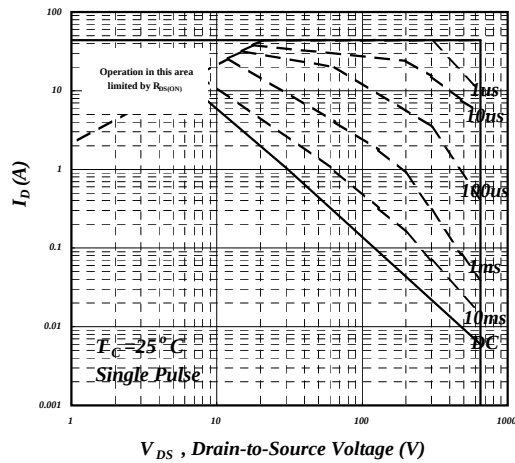


**Fig 9. Maximum Safe Operating Area**

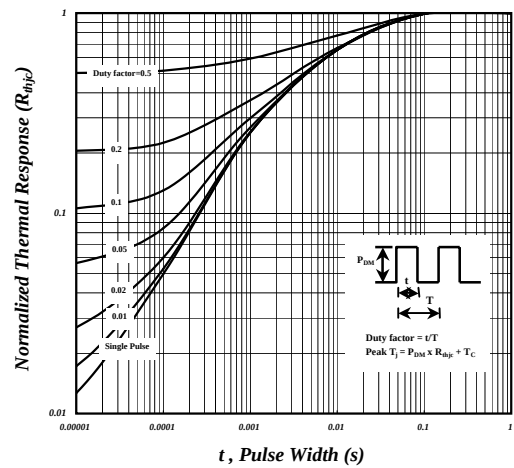

**Fig10. Effective Transient Thermal Impedance**

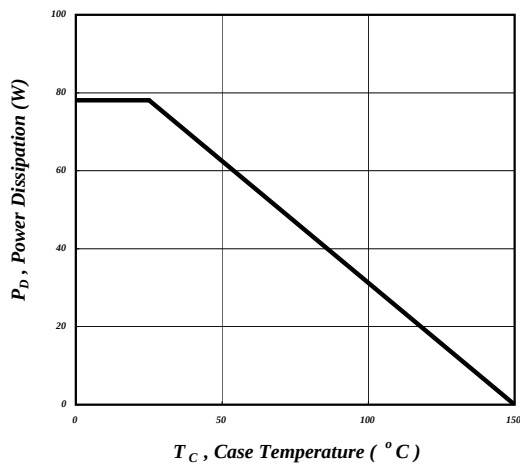


**Fig 11. Total Power Dissipation**

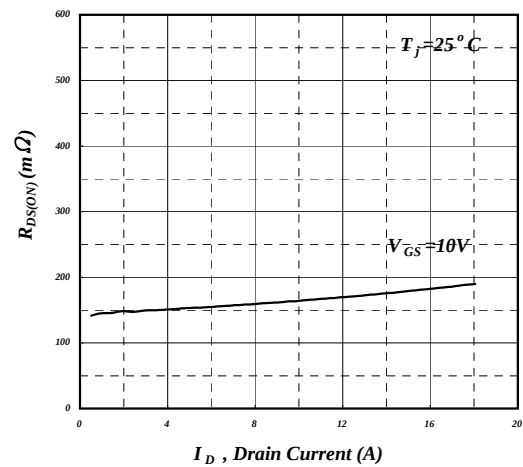


**Fig 12. Typ. Drain-Source on State Resistance**


---

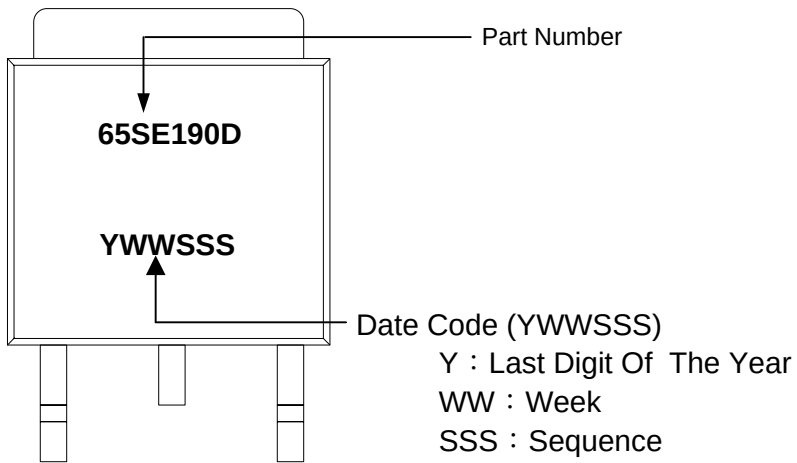**MARKING INFORMATION**

## Package Outline : TO-252

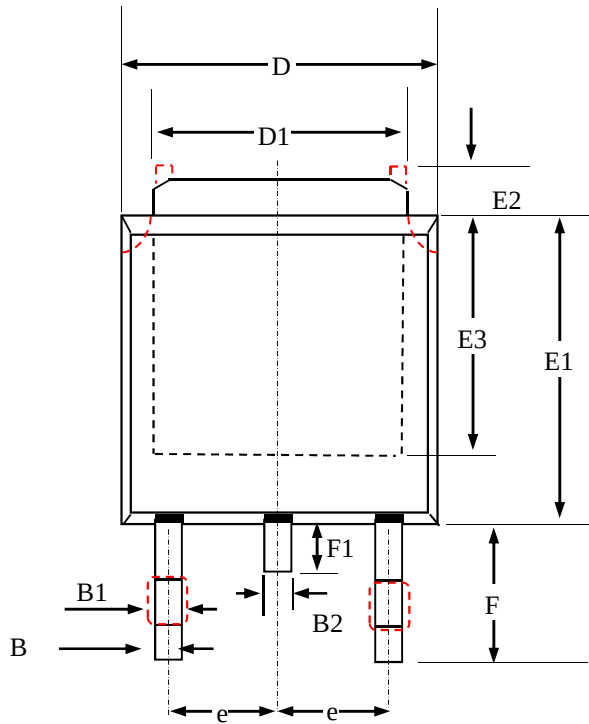

| SYMBOLS | Millimeters |       |      |
|---------|-------------|-------|------|
|         | MIN         | NOM   | MAX  |
| A2      | 2.18        | 2.30  | 2.40 |
| A3      | 0.40        | 0.50  | 0.65 |
| B       | 0.40        | 0.70  | 1.00 |
| B1      | 0.50        | 0.85  | 1.20 |
| D       | 6.00        | 6.50  | 6.80 |
| D1      | 4.80        | 5.35  | 5.90 |
| E3      | 4.00 (ref.) |       |      |
| F       | 2.00        | 2.63  | 3.05 |
| F1      | 0.50        | 0.85  | 1.20 |
| E1      | 5.00        | 5.70  | 6.30 |
| E2      | 0.50        | 1.10  | 1.80 |
| e       | 2.3 (ref)   |       |      |
| C       | 0.35        | 0.525 | 0.70 |
| A1      | 0.00        | —     | 0.25 |
| B2      | —           | —     | 1.25 |
| L       | 0.90        | 1.34  | 1.78 |

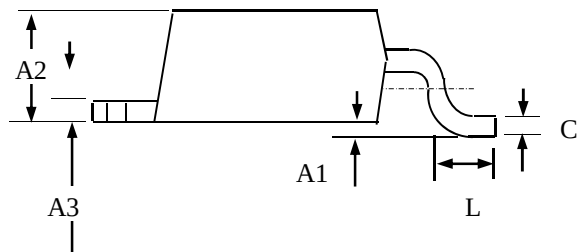

- 1.All Dimensions Are in Millimeters.
- 2.Dimension Does Not Include Mold Protrusions.
3. Thermal PAD, Body and Pin contour is for reference, it may has little difference by option.

**TO-252 FOOTPRINT :**

