



YDA139

D-4

STEREO 2.5W DIGITAL AUDIO POWER AMPLIFIER

■ Overview

YDA139 (D-4) is a digital audio power amplifier IC with maximum output of 2.5W ($R_L=4\Omega$) $\times$ 2ch.

YDA139 has a "Pure Pulse Direct Speaker Drive Circuit" which directly drives speakers while reducing distortion of pulse output signal and reducing noise on the signal, and realizes the highest standard low distortion rate characteristics and low noise characteristics as the same class of output digital amplifier IC.

In addition, circuit design with fewer external parts can be made depend on the condition of use because corresponds to filter less.

YDA139 has the power-down function which can minimize the power consumption in the standby state.

In addition, high speed recovery function provided realizes recovery time within 1ms from the power-down state. Moreover, Over-current Protection function for speaker output terminals, IC Thermal Protection function, and POP Noise Reduction function are provided.

YDA139 supports both digital signal input and analog signal input.

■ Features

• Maximum output

WLCSP25

2.5 W $\times$ 2ch ($V_{DDP}=V_{DDA}=5.0V$, $R_L=4\Omega$, THD+N=10%)

1.5 W $\times$ 2ch ($V_{DDP}=V_{DDA}=5.0V$, $R_L=8\Omega$, THD+N=10%)

SSOP24

2.5 W $\times$ 2ch ($V_{DDP}=V_{DDA}=5.0V$, $R_L=4\Omega$, THD+N=10%)

1.3 W $\times$ 2ch ($V_{DDP}=V_{DDA}=5.0V$, $R_L=8\Omega$, THD+N=10%)

• Efficiency

WLCSP25

91 % (Analog input mode, $V_{DDP}=V_{DDA}=5.0V$, $R_L=8\Omega$, $P_o=1.5W$)

SSOP24

88 % (Analog input mode, $V_{DDP}=V_{DDA}=5.0V$, $R_L=8\Omega$, $P_o=1.5W$)

• Distortion Rate (THD+N)

0.03 % (Analog input mode, $V_{DDP}=V_{DDA}=5.0V$, $R_L=8\Omega$, $P_o=0.65W$)

• S/N Ratio

99dB (Analog input mode, $V_{DDP}=V_{DDA}=5.0V$, Gain[1:0]=L,L)

• Over-current Protection function

• Thermal Protection function

• Low voltage Malfunction Prevention function

• Power-down function by PDN terminal

• Power-down High speed Recovery function

• Package

Lead-free 25-ball WLCSP (YDA139-WZ)

Lead-free 24-pin SSOP (YDA139-EZ)


YAMAHA CORPORATION

YDA139 CATALOG

CATALOG No.:LSI-4DA139A30


2006.2

■ Terminal configuration

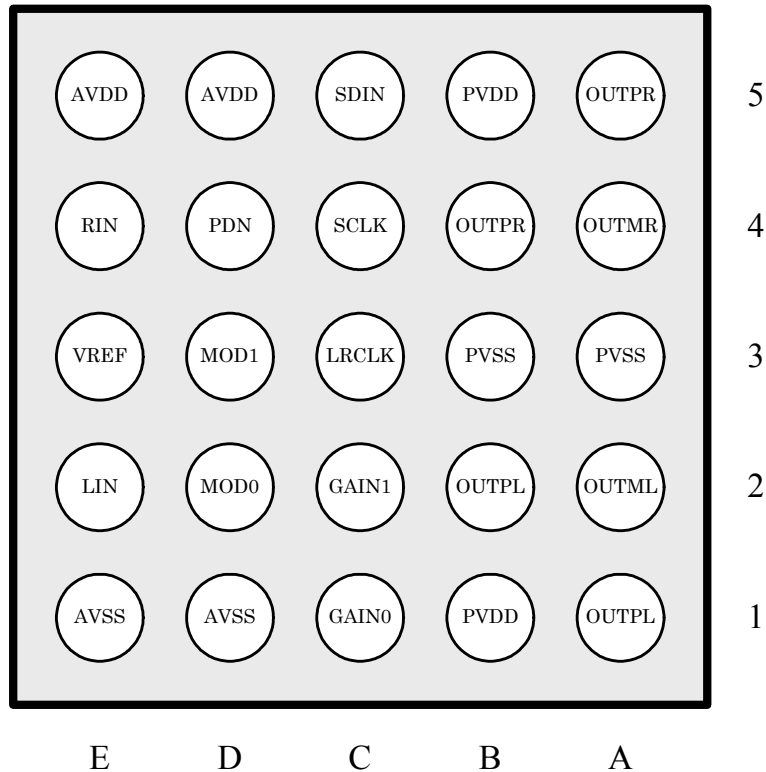

<25-ball WLCSP Bottom View>

www.DataSheet4U.com

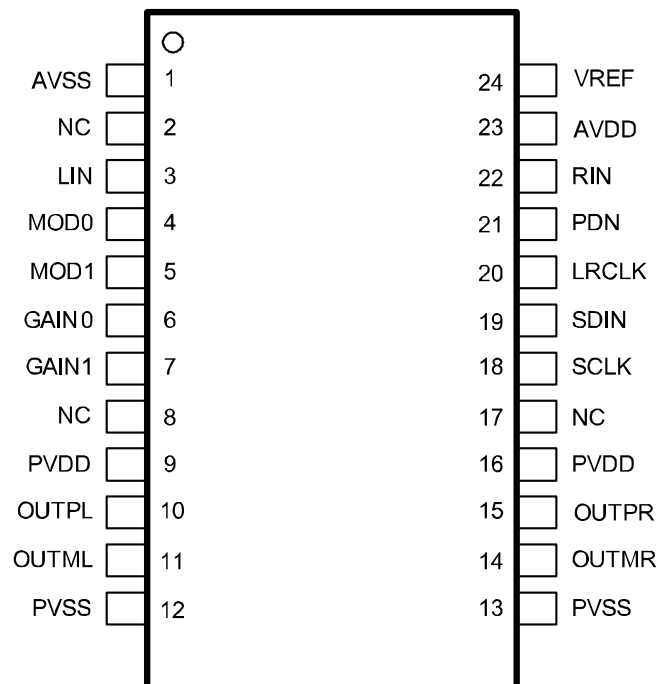

<24-pin SSOP Top View>

YDA139

■ Terminal function

• WLCSP25

No.	Name	I/O	Function
A1	OUTPL	O	Positive differential output terminal Lch 1
A2	OUTML	O	Negative differential output terminal Lch
A3	PVSS	GND	GND for output
A4	OUTMR	O	Negative differential output terminal Rch
A5	OUTPR	O	Positive differential output terminal Rch 1
B1	PVDD	Power	Power supply for output (non-regulated)
B2	OUTPL	O	Positive differential output terminal Lch 2
B3	PVSS	GND	GND 2 for output
B4	OUTPR	O	Positive differential output terminal Rch 2
B5	PVDD	Power	Power supply for output
C1	GAIN0	I	Gain setting terminal
C2	GAIN1	I	Gain setting terminal
C3	LRCLK	I	Word clock input terminal
C4	SCLK	I	Bit clock input terminal
C5	SDIN	I	Data clock input terminal
D1	AVSS	GND	GND for analog circuit
D2	MOD0	I	Analog /Digital /Mix mode switching terminal
D3	MOD1	I	Analog /Digital /Mix mode switching terminal
D4	PDN	I	Power-down terminal
D5	AVDD	Power	Power supply for analog circuit
E1	AVSS	GND	GND for analog circuit
E2	LIN	A	Analog input terminal Lch
E3	VREF	A	VREF terminal
E4	RIN	A	Analog input terminal Rch
E5	AVDD	Power	Power supply for analog circuit


(Note) I: Input terminal O: Output terminal A: Analog terminal

• SSOP24

No.	Name	I/O	Function
1	AVSS	GND	GND for analog circuit
2	NC	-	Non connection.
3	LIN	A	Analog input terminal Lch
4	MOD0	I	Analog /Digital /Mix mode switching terminal
5	MOD1	I	Analog /Digital /Mix mode switching terminal
6	GAIN0	I	Gain setting terminal
7	GAIN1	I	Gain setting terminal
8	NC	-	Non connection.
9	PVDD	Power	Power supply for output
10	OUTPL	O	Positive differential output terminal Lch
11	OUTML	O	Negative differential output terminal Lch
12	PVSS	GND	GND for output
13	PVSS	GND	GND for output
14	OUTMR	O	Negative differential output terminal Rch
15	OUTPR	O	Positive differential output terminal Rch
16	PVDD	Power	Power supply for output
17	NC	-	Non connection.
18	SCLK	I	Bit clock input terminal
19	SDIN	I	Data clock input terminal
20	LRCLK	I	Word clock input terminal
21	PDN	I	Power-down terminal
22	RIN	A	Analog input terminal Rch
23	AVDD	Power	Power supply for analog circuit
24	VREF	A	VREF terminal

(Note) I: Input terminal O: Output terminal A: Analog terminal

■ Block diagram

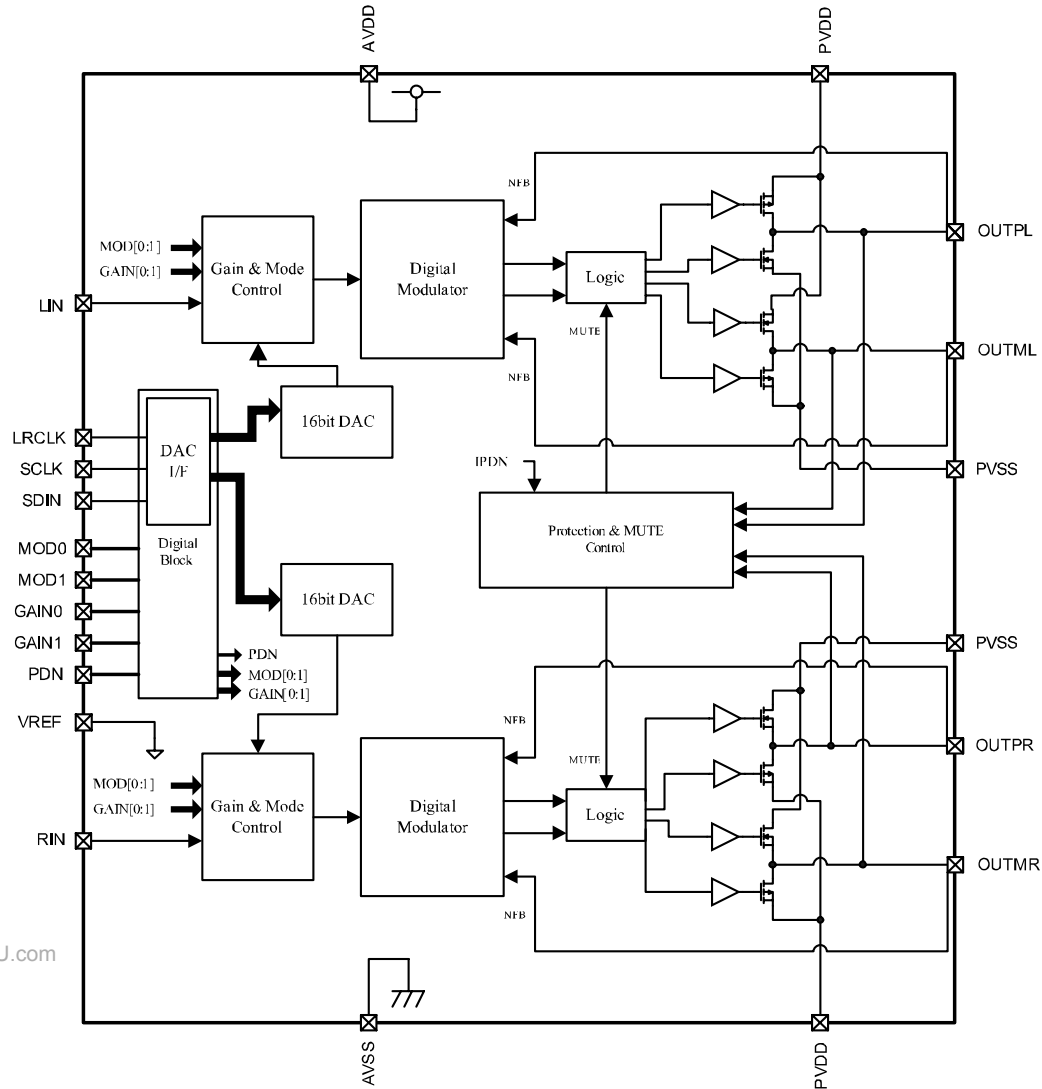

YDA139

■Description of operating functions

●Digital Amplifier Function

YDA139 has digital amplifiers with analog and digital input, PWM pulse output, Maximum output of $2.5W(R_L=4\Omega)\times 2ch$. Distortion of PWM pulse output signal and noise of the signal is reduced by adopting "Pure Pulse Direct Speaker Drive Circuit"

First Stage Amplifier Gain Setting Function

YDA139 is composed of the first stage amplifier with gain setting control and a 6dB fixed-gain digital amplifier. Gain of the first stage amplifier can be set by GAIN[1:0] terminal.

Digital Amplifier Gain Setting (Analog Input –Digital Amplifier Output)

GAIN1	GAIN0	Gain	Input Sensitivity	Input Impedance(Z_{IN})
L	L	12dB	800mVrms	100k Ω
L	H	18dB	400mVrms	66.3k Ω
H	L	21.6dB	250mVrms	50k Ω
H	H	26dB	150mVrms	33.3k Ω

Note) H and L indicates logic High and logic Low, respectively.

Connect a 0.01 μ F or more capacitor to the audio signal input terminals (LIN and RIN) for the rejection of DC signal.

The input low region cutoff frequency is calculated by $1/(2\times\pi\times Z_{IN}\times C_{IN})$.

When GAIN[0:1]=L,L and $C_{IN}=0.01\mu F$, the input low region cutoff frequency becomes 159Hz.

And, half voltage (V_{REF}) of AVDD terminal voltage is output to the reference voltage terminals (VREF). Connect a 1 μ F or more capacitor to the terminals for voltage stabilization.

*When the input low region cutoff frequency is lowered, capacitor that is larger than 0.01 μ F (max. 0.1 μ F) can be connected. However, please note the following points.

- (1) The pop noise when the power supply is disconnected might become large. Therefore, correspond by following method.
 - ① After PDN terminal change to "L", disconnect power supply.
 - ② VREF capacitor is set to $C_{REF}=C_{IN}\times 20[\mu F]$.
- (2) The recovery time from the power down becomes long. (Refer to the item "Power Down Function" for relation between the recovery time t_{PDR} and C_{IN} and C_{REF} .)


●DAC Function

YDA139 includes a stereo DAC with 44.1kHz, 48kHz/16bit. The output of DAC is amplified by the digital amplifier to output to speakers. The digital signal input supports the following format.

Gain from DAC output to the digital amplifier output is fixed to 12dB. The full scale voltage (V_{FS}) of DAC is depending on AVDD terminal voltage (V_{DDA}) and can be found with the following formula: $V_{FS}=V_{DDA}\times 0.56$.

V_{FS} is amplified 12dB, and it becomes an amplifier output. For example, $V_{FS}=1.68V$ and amplifier output (BTL) =6.72Vpp at $V_{DDA}=3V$.

Do not input the DC signal to YDA139 because built-in DAC doesn't have the DC cutting function. And, do not stop each clock of SCLK, LRCLK and SDIN at the digital input mode and mixing mode.

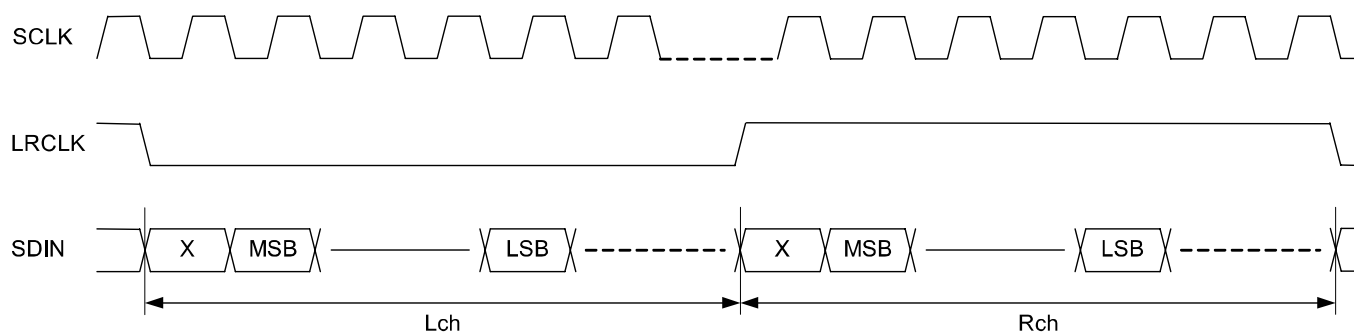

Left channel is received when LRCLK is L.

Right channel is received when LRCLK is H.

SDIN and LRCLK are sampled at the rising edge of SCLK.

Digital Signal Input Format (16-bit format with left-justified and a one bit clock delay).

● Mode Selection Function

YDA139 has mode selection function for selecting analog input and digital input. In the digital input mode, DAC output signal is output in 12 dB(fixed) of gain. In the analog input mode, analog signal that was input to LIN/RIN is output in a gain in accordance with the setting of GAIN[1:0] terminal. In the mixing mode, the digital input and analog input is mixed and output.

MOD[1:0] Setting and Operation Mode

MOD1	MOD0	Function
L	L	Digital Input Mode
L	H	Analog Input Mode (DAC Power-down)
H	L	Mixing Mode
H	H	Reserved


Note) MOD[1:0]=H,H is already reserved by the system.

● Power-down Function

When PDN terminal is L, the power-down mode is selected in YDA139. The mode stops all the circuit functions and minimizes power consumption. At this time, the output stage of the digital amplifier is disabled (WL^{*1}). In addition, the High Speed Recovery function allows recovery to the normal operation at 0.8msec(t_{PDR}) when setting PDN to H in the power-down state.

Note)*1: “WL” means output disabled (weak pull-down output).

The relation between power down recovery time (t_{PDR}) and C_{IN} is as follows.

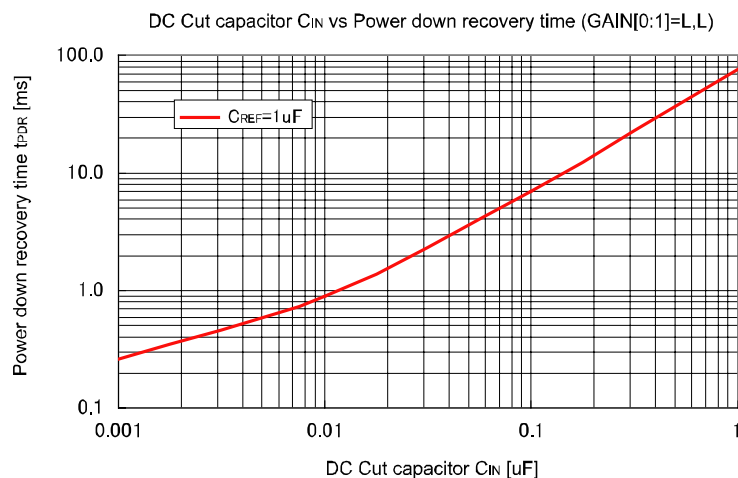

YDA139

●Protection Function

YDA139 has the following protection functions for the digital amplifier: Over-current Protection function, Thermal Protection function, Low voltage Malfunction Prevention function, and Power supply voltage fluctuation protection function.

Over-current Protection function

This is a function to make the Over-current Protection Mode by detecting a short-circuiting (Ground short/Power supply short/Short between terminals) in the output stage of digital amplifier and to disable (WL) the output stage of the digital amplifier. When entering the Protection Mode, automatically it returns to the normal operation after a given waiting time(T_{WT}). If short circuiting in the output stage continues, the sequence is repeated: short circuit detection, protection mode (T_{WT}), and automatic recovery.

Thermal Protection function

This is a function to make the Thermal Protection Mode by detecting extraordinary high temperature of YDA139 and to disable (WL) the output stage of the digital amplifier. This Protection mode is automatically returned to the normal operation state when internal temperature of YDA139 is lowered sufficiently.

Low voltage Malfunction Prevention function

YDA139 has this Prevention function so as not to cause malfunction in the low power supply voltage. When AVDD voltage becomes lower than V_{UVLL} , the Protection mode is operated to disable (WL) the output stage of the digital amplifier. When AVDD voltage becomes higher than V_{UVLH} , the protection mode is cancelled after a given waiting time and turns into the normal mode.

Power supply Voltage Fluctuation Detection function

YDA139 has this detecting function so that noise may not be generated from speakers when AVDD voltage was lowered significantly. When AVDD voltage becomes lower than V_{ML} , the protection mode is operated to disable (WL) the output stage of the digital amplifier. When AVDD voltage becomes higher than V_{ML} , the protection mode is cancelled and turned into the normal operation mode.

●Pop noise reduction

When used in Digital Input mode (MOD[1:0]=L,L) and Mixing mode (MOD[1:0]=H,L), cut power off after setting PDN terminal to "L" in order to reduce the pop noise.

●Snubber Circuit


www.DataSheet4U.com

When use in power supply voltage 4.5V or more, connect the RC snubber circuit between each output terminal (Lch: between OUTPL and OUTML, Rch: between OUTPR and OUTMR, near IC).

The constant and the snubber circuit are as follows.

Power supply voltage range	R	C
4.5 to 5.25V	1Ω	330pF ^{*1}


*1: Use the temperature compensated capacitor.

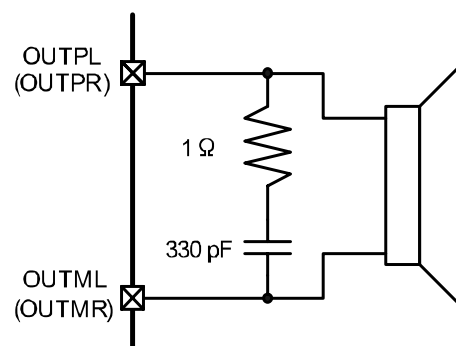

■ Application circuit examples


● Correspond to Digital input/Analog input/Mixing mode

- Snubber circuit is unnecessary. (When use in power supply voltage under 4.5V)

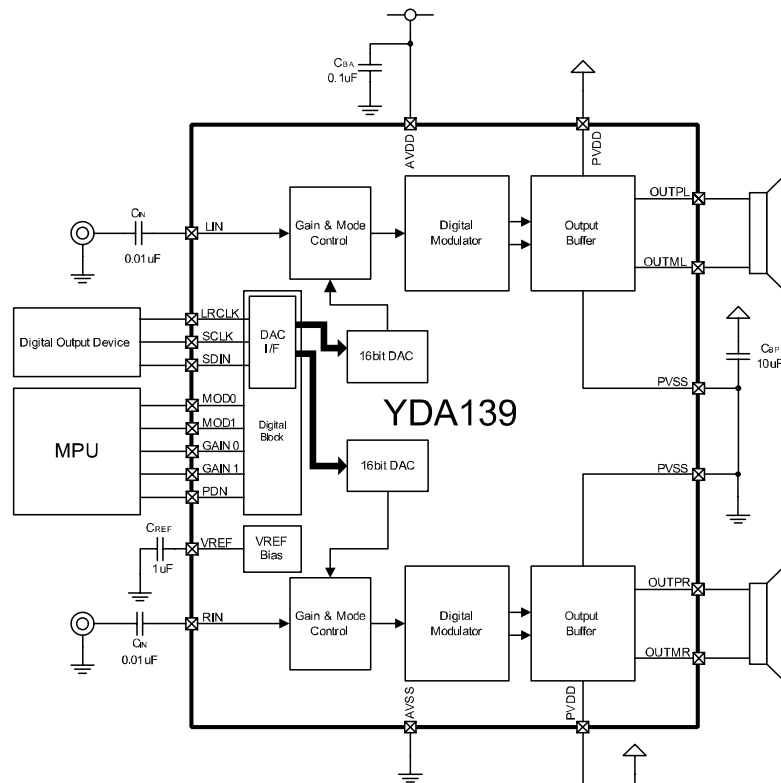


- Snubber circuit is necessary. (When use in power supply voltage 4.5V or more.)

www.DataSheet4U.com

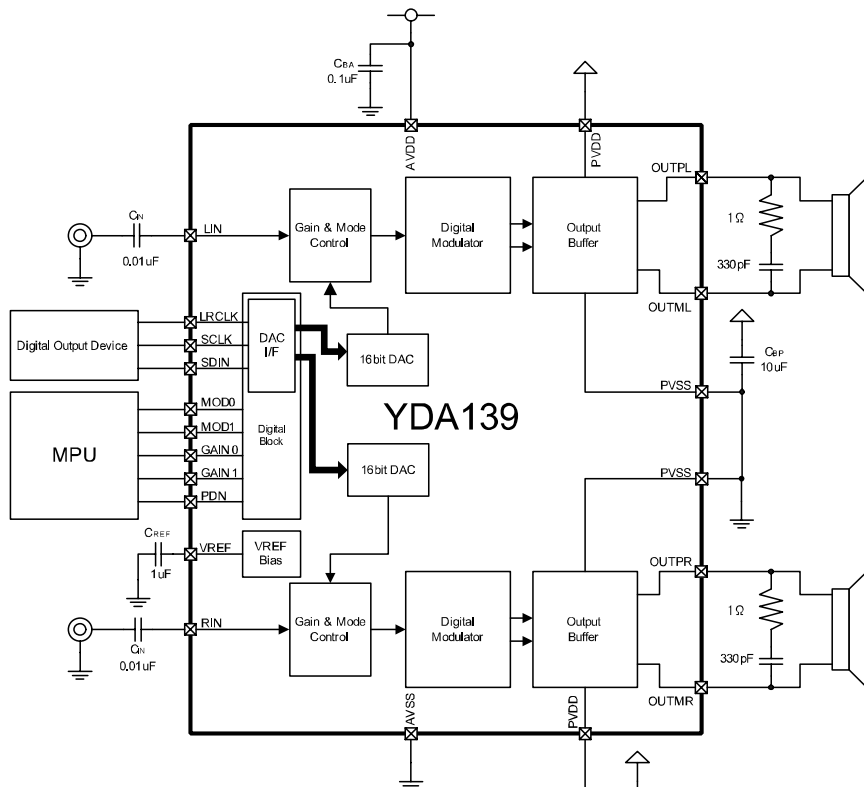


YDA139

- Correspond to Digital input mode (Without Snubber circuit)

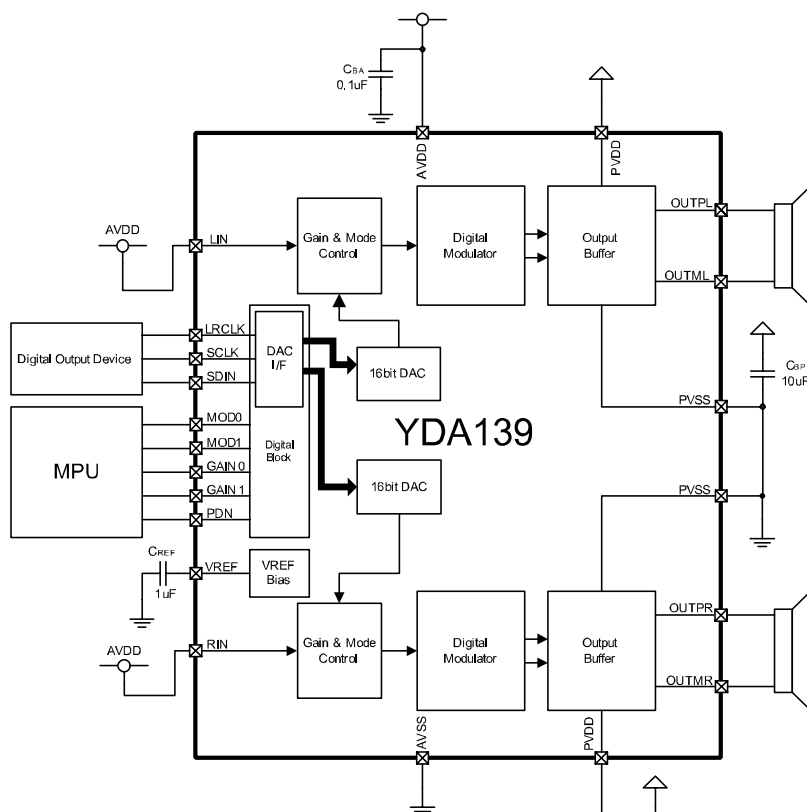

- Correspond to Analog input mode (Without Snubber circuit)

www.DataSheet4U.com

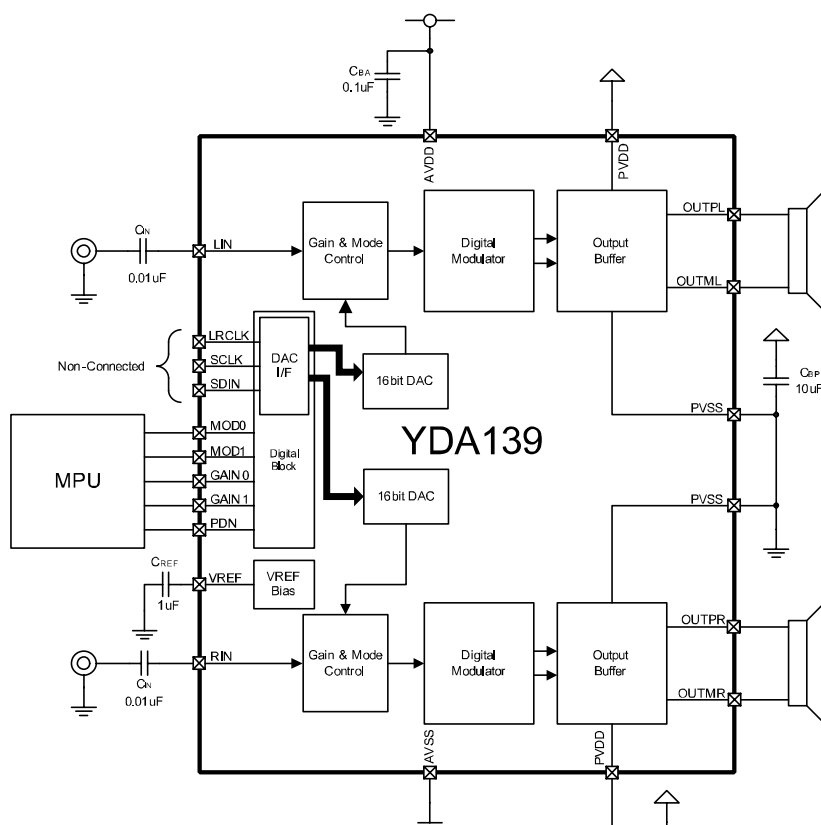

■Electrical Characteristic

●Absolute Maximum Ratings^{*1)}

Item	Symbol	Min.	Max.	Unit
Power supply terminal (PVDD) Voltage Range	V _{DDP}	−0.3	6.0	V
Power supply terminal (AVDD) Voltage Range	V _{DDP}	−0.3	6.0	V
Input terminal Voltage Range ^{*2)}	V _{IN}	V _{SS} −0.3	V _{DDP} +0.3	V
Allowable dissipation (WLCSP25, Ta=25°C)	P _{D25}		1.26	W
Allowable dissipation (WLCSP25, Ta=85°C)	P _{D85}		0.51	W
Allowable dissipation (WLCSP25, Ta=25°C)	P _{D25}		1.03	W
Allowable dissipation (WLCSP25, Ta=70°C)	P _{D70}		0.41	W
Storage Temperature	T _{STG}	−50	125	°C

Note) *1: Absolute Maximum Ratings is values which must not be exceeded to guarantee device reliability and life, and when using a device in excess even a moment, it may immediately cause damage to device or may significantly deteriorate its reliability

*2: Input terminal means MOD0, MOD1, GAIN0, GAIN1, SCLK, SDIN, LRCLK, and PDN terminal.

●Recommended Operating Condition

Item	Symbol	Min.	Typ.	Max.	Unit
Power Supply Voltage(PVDD)	V _{DDP}	2.7	5	5.25	V
Power Supply Voltage(AVDD)	V _{DDA}	2.7	5	5.25	V
Operating Ambient Temperature	T _a	−20	25	85	°C
Speaker Impedance	R _L	4	-	-	Ω

●DC Characteristics (V_{SS}=0V, V_{DDP}=V_{DDA}=2.7V to 5.25V, Ta=−20°C to 85°C, unless otherwise specified)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output buffer H level output voltage	V _{POH}	I _{OH} =100mA	V _{DDP} −0.1	-	-	V
Output buffer L level output voltage	V _{POL}	I _{OL} =100mA	-	-	0.05	V
AVDD terminal start-up threshold voltage	V _{UVLH}	-	-	2.2	-	V
AVDD terminal shut-down threshold voltage	V _{UVLL}	-	-	2.0	-	V
Power Supply fluctuation shut-down threshold voltage	V _{ML}	-	-	V _{REF} × 1.5 ^{*3)}	-	V
Digital terminal ^{*4)} H level input voltage	V _{IH}	V _{DDA} =5.25V	2.16	-	-	V
Digital terminal ^{*4)} H level input voltage	V _{IH}	V _{DDA} =3.3V	1.32	-	-	V
Digital terminal ^{*4)} L level input voltage	V _{IL}	V _{DDA} =2.7V	-	-	0.32	V
VREF output voltage	V _{REF}	V _{DDA} =5V	-	2.5	-	V
Analog mode AVDD terminal consumption current	I _{DD}	V _{DDA} =5V, no load	-	3.3	-	mA
Analog mode PVDD terminal consumption current	I _{DD}	V _{DDP} =5V, no load	-	2.6	-	mA
Digital mode AVDD terminal consumption current	I _{DD}	V _{DDA} =5V, no load	-	6.1	-	mA
Digital mode PVDD terminal consumption current	I _{DD}	V _{DDP} =5V, no load	-	2.6	-	mA
Consumption current in power-down (PDN=L) AVDD terminal + PVDD terminal	I _{PD}	V _{DDA} =V _{DDP} =5V, Ta=25°C	-	0.1	-	μA

Note) *3: The value when the AVDD power supply voltage becomes 75% or less is meant.


*4: Digital terminal means MOD0, MOD1, GAIN0, GAIN1, SCLK, SDIN, LRCLK, and PDN terminal.

YDA139

●AC characteristics ($V_{SS}=0V$, $V_{DDP}=V_{DDA}=2.7V$ to $5.25V$, $T_a=-20^{\circ}C$ to $85^{\circ}C$, unless otherwise specified)

Item	Symbol	Min.	Typ.	Max.	Unit
SCLK frequency	$1/T_{SCK}^{*5)}$	-	3.07	-	MHz
SCLK Hi time	T_{SCKH}	40	-	-	ns
SCLK Lo time	T_{SCKL}	40	-	-	ns
SDIN input set-up time	T_{SDS}	60	-	-	ns
SDIN input hold time	T_{SDH}	25	-	-	ns
LRCLK input set-up time	T_{LRS}	60	-	-	ns
LRCLK input hold time	T_{LRH}	25	-	-	ns

Note) *5: $1/T_{SCK}=32Fs \sim 64Fs$ ($Fs=44.1kHz, 48kHz$)

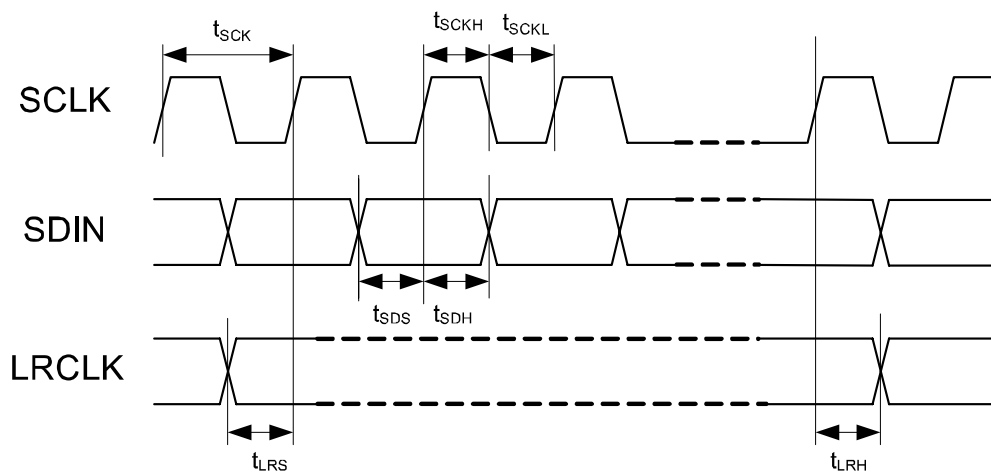

●Analog Characteristics^{*6)} ($V_{SS}=0V$, $V_{DDP}=V_{DDA}=5.0V$, $T_a=25^{\circ}C$, $R_L=8\Omega$, unless otherwise specified)

•Digital Amplifier Section

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Maximum output (WLCSP25)	P_O	$R_L=8\Omega$ $V_{DDP}=5.0V, V_{DDA}=5.0V, f=1kHz, THD+N=10\%$		1.5		W
		$V_{DDP}=3.6V, V_{DDA}=3.0V, f=1kHz, THD+N=10\%$		0.8		W
		$R_L=4\Omega$ $V_{DDP}=5.0V, V_{DDA}=5.0V, f=1kHz, THD+N=10\%$		2.5		W
		$V_{DDP}=3.6V, V_{DDA}=3.0V, f=1kHz, THD+N=10\%$		1.2		W
Maximum output (SSOP24)	P_O	$R_L=8\Omega$ $V_{DDP}=5.0V, V_{DDA}=5.0V, f=1kHz, THD+N=10\%$		1.3		W
		$V_{DDP}=3.6V, V_{DDA}=3.0V, f=1kHz, THD+N=10\%$		0.65		W
		$R_L=4\Omega$ $V_{DDP}=5.0V, V_{DDA}=5.0V, f=1kHz, THD+N=10\%$		2.5		W
		$V_{DDP}=3.6V, V_{DDA}=3.0V, f=1kHz, THD+N=10\%$		1.0		W
Voltage Gain (Analog input mode)	A_v	GAIN[1:0]=L,L		12		dB
		GAIN[1:0]=L,H		18		dB
		GAIN[1:0]=H,L		21.6		dB
		GAIN[1:0]=H,H		26		dB
Total Harmonic Distortion Rate (Analog input mode)	THD+N	$R_L=4\Omega$, $P_O=1.25W$, $f=1kHz$, GAIN[1:0]=L,L		0.03		%
		$R_L=8\Omega$, $P_O=0.65W$, $f=1kHz$, GAIN[1:0]=L,L		0.03		%
Total Harmonic Distortion Rate (Digital input mode)	THD+N	$R_L=4\Omega$, $P_O=1.25W$, $f=1kHz$		0.05		%
		$R_L=8\Omega$, $P_O=0.65W$, $f=1kHz$		0.05		%
Signal /Noise Ratio (Analog input mode)	SNR	$R_L=8\Omega$, $P_O=1.5W$, A-Weight, GAIN [1:0]=L,L		99		dB
Signal /Noise Ratio (Digital input mode)	SNR	$R_L=8\Omega$, $P_O=1.5W$, A-Weight		98		dB
Channel Separation Ratio	CS	1kHz, GAIN[1:0]=L,L		85		dB
Power supply rejection ratio ^{*7)}	PSRR	$V_{DDP}=5.0V$, $V_{DDA}=5.0V$, $f=217Hz$		80		dB
		$V_{DDP}=3.6V$, $V_{DDA}=3.0V$, $f=217Hz$		90		dB
Maximum Efficiency (WLCSP25)	η	$R_L=8\Omega$, $P_O=1.5W$		91		%
Maximum Efficiency (SSOP24)	η	$R_L=8\Omega$, $P_O=1.5W$		88		%
Output offset voltage (Analog input mode)	V_O	-		± 10		mV
Output offset voltage (Digital input mode)	V_O	-		± 20		mV
Frequency characteristics (Analog input mode)	f_{RES}	$C_{IN}=0.01\mu F$, $f=200Hz$		-3/+1		dB
		$C_{IN}=0.01\mu F$, $f=20kHz$		± 1		dB
Frequency characteristics (Digital input mode)	f_{RES}	$f=20Hz$		± 1		dB
		$f=20kHz$		± 1		dB
Carrier clock frequency	f_{SW}	AVDD=5V	-	920	-	kHz
Over-current protection mode recovery time	T_{WT}	$C_{VREF}=1\mu F$, $C_{IN}=0.01\mu F$	-	300	-	ms
Start-up time when power supply rise	T_{PS}	$C_{VREF}=1\mu F$, $C_{IN}=0.01\mu F$	-	400	-	ms
Power-down recovery time	T_{PDR}	$C_{VREF}=1\mu F$, $C_{IN}=0.01\mu F$	-	0.8	-	ms

Note) *6: All the values of analog characteristics were obtained by using our evaluation circumstance.







Depending upon parts and pattern layout to use, characteristics may be changed.





*7: AVDD and PVDD are different power supply.

*8: Measurements in $V_{DDP}=5V$ is the value in which snubber circuit ($1\Omega+330pF$) is mounted.


YDA139

● Typical characteristics examples ($V_{DDP} = V_{DDA} = 5.0V$, $T_a = 25^\circ C$, $R_L = 8\Omega + 30\mu H$, unless otherwise specified)

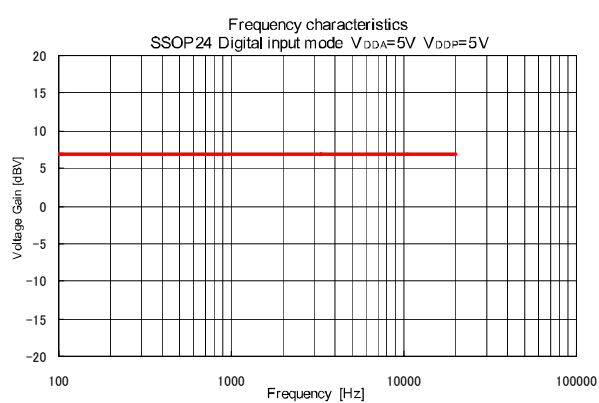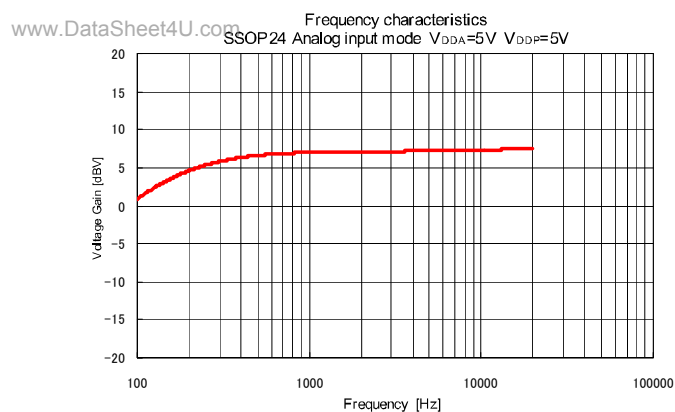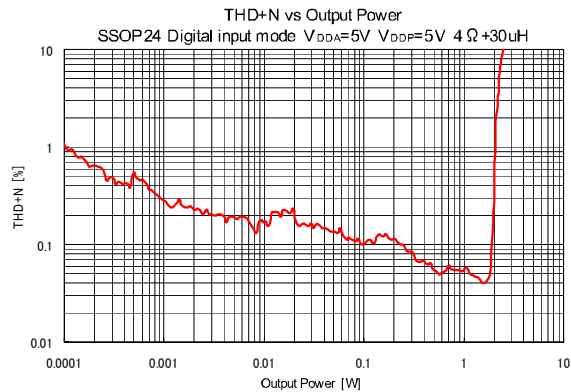
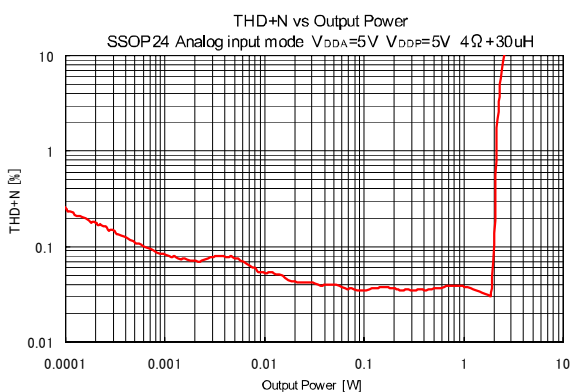
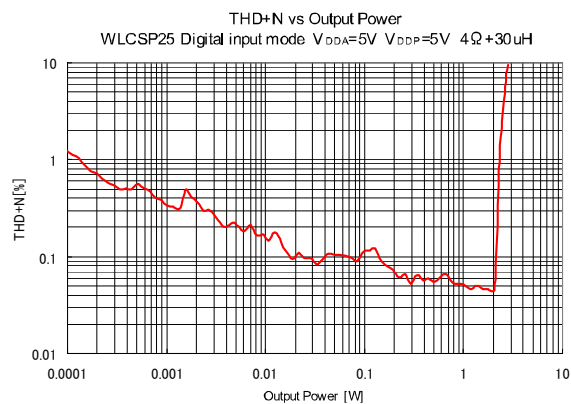
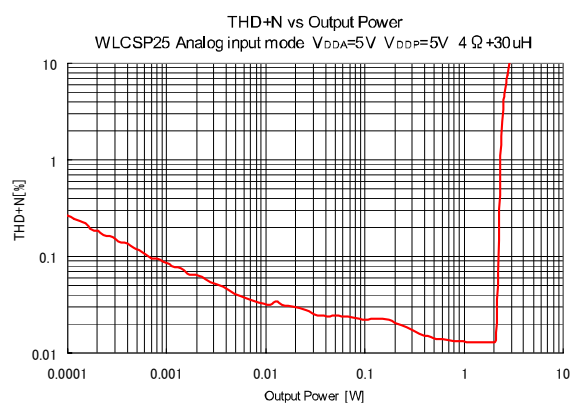


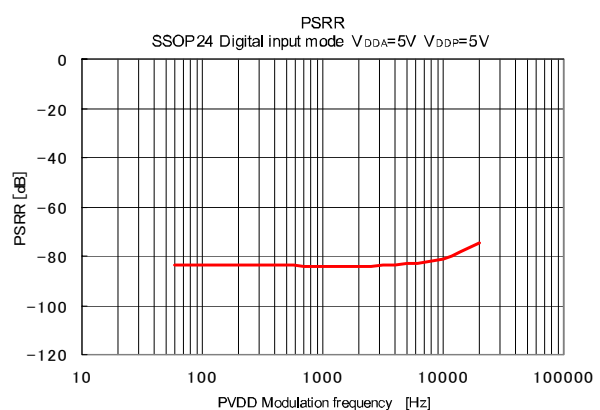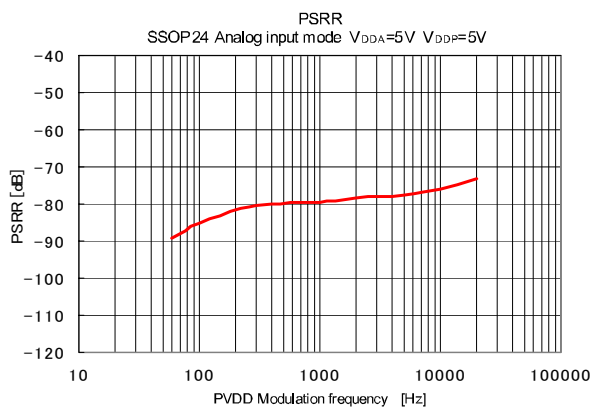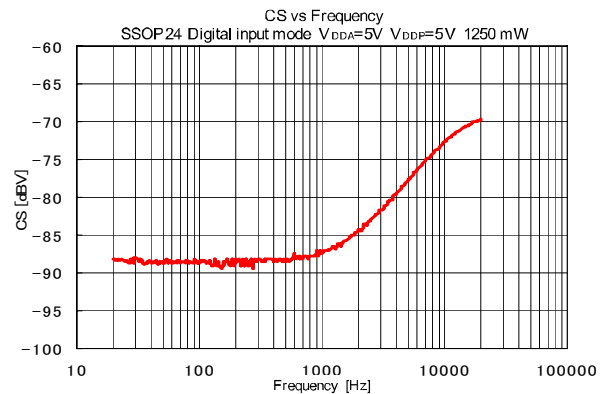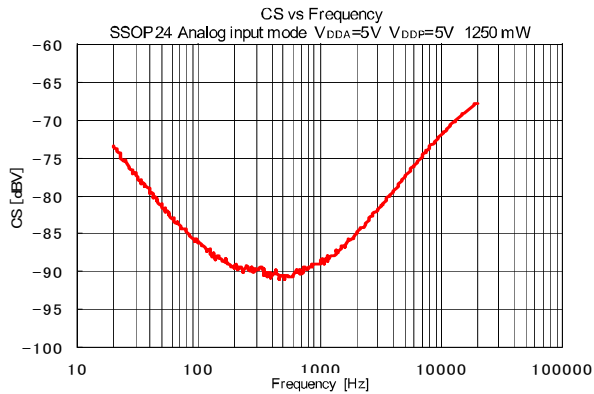



Note) The frequency characteristics, channel separation (CS), and power supply rejection ratio (PSRR) are almost equal characteristics regardless of the package.

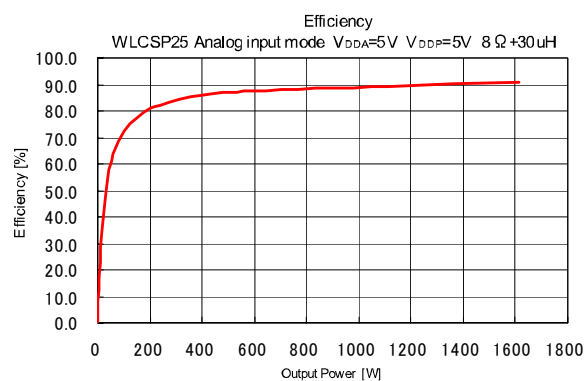


YDA139

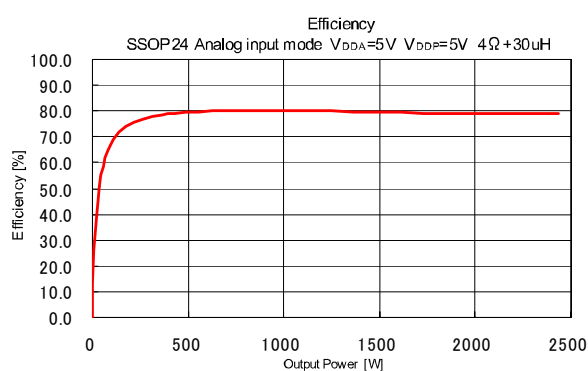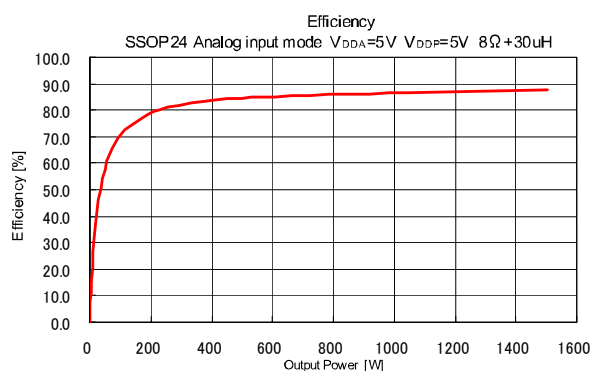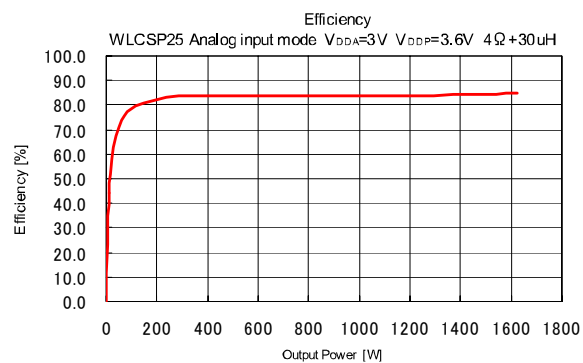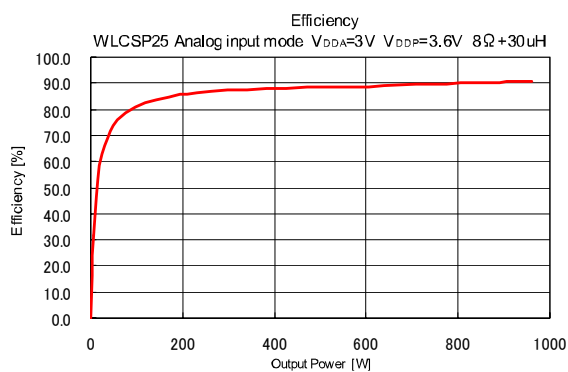

www.DataSheet4U.com

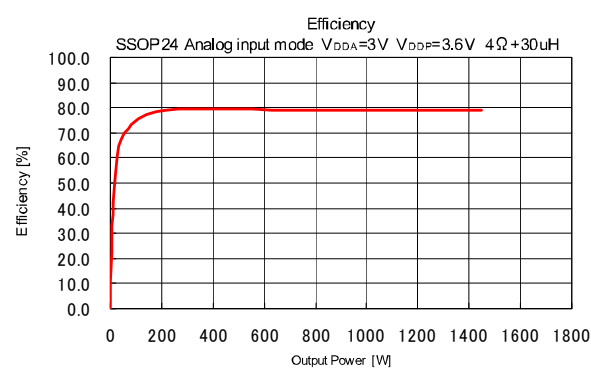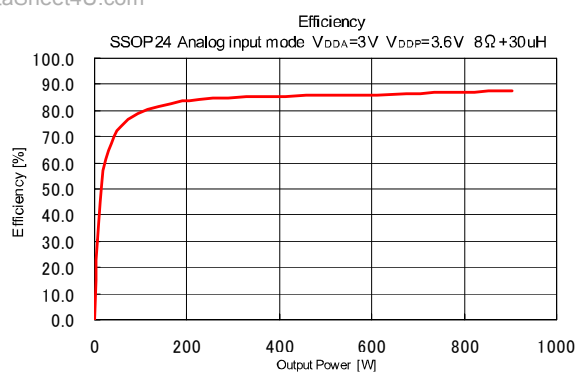

Note) Measurements in $V_{DDP}=5V$ is the value in which snubber circuit ($1\Omega+330pF$) is mounted.

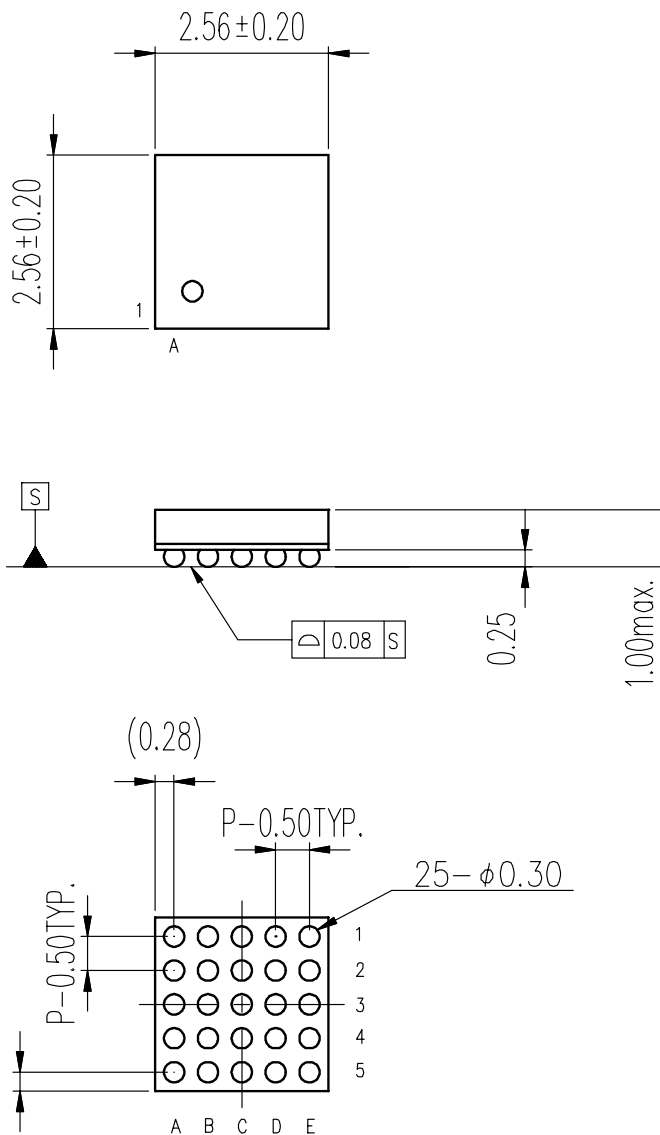■ Package Outline
C-PK25WP-2


モールドコーナ形状は、この図面と若干異なるタイプもあります。
 カッコ内の寸法値は参考値です。
 モールド外形寸法はバリを含みます。
 単位：mm


The shape of the molded corner may slightly differ from the shape in this diagram.
 The figure in the parentheses () should be used as a reference.
 Plastic body dimensions include resin burr.
 UNIT: mm

注) 表面実装LSIは、保管条件、及び半田付けについての特別な配慮が必要です。
 詳しくはヤマハ代理店までお問い合わせください。

Note: The storage and soldering of LSIs for surface mounting need special consideration.
 For detailed information, please contact your local Yamaha agent.

YDA139

C-PK24EP-1

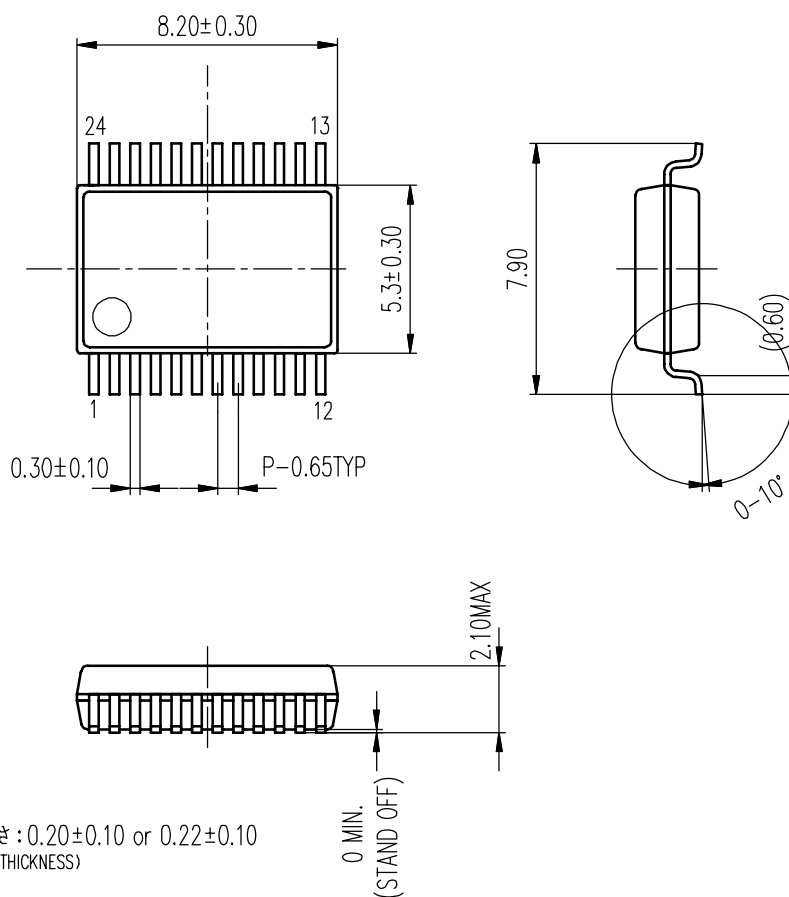

端子厚さ : 0.20 ± 0.10 or 0.22 ± 0.10
(LEAD THICKNESS)

www.DataSheet4U.com

モールドコーナー形状は、この図面と若干異なるタイプもあります。
カッコ内の寸法値は参考値です。
モールド外形寸法はバリを含みません。
単位 : mm

The shape of the molded corner may slightly differ from the shape in this diagram.
The figure in the parentheses () should be used as a reference.
Plastic body dimensions do not include resin burr.
UNIT: mm

注) 表面実装LSIは、保管条件、及び半田付けについての特別な配慮が必要です。
詳しくはヤマハ代理店までお問い合わせください。

Note: The storage and soldering of LSIs for surface mounting need special consideration.
For detailed information, please contact your local Yamaha agent.

IMPORTANT NOTICE

1. YAMAHA RESERVES THE RIGHT TO MAKE CHANGES TO ITS PRODUCTS AND TO THIS DOCUMENT WITHOUT NOTICE. THE INFORMATION CONTAINED IN THIS DOCUMENT HAS BEEN CAREFULLY CHECKED AND IS BELIEVED. HOWEVER, YAMAHA SHALL ASSUME NO RESPONSIBILITIES FOR INACCURACIES AND MAKE NO COMMITMENT TO UPDATE OR TO KEEP CURRENT THE INFORMATION CONTAINED IN THIS DOCUMENT.
2. THESE YAMAHA PRODUCTS ARE DESIGNED ONLY FOR COMMERCIAL AND NORMAL INDUSTRIAL APPLICATIONS, AND ARE NOT SUITABLE FOR OTHER USES, SUCH AS MEDICAL LIFE SUPPORT EQUIPMENT, NUCLEAR FACILITIES, CRITICAL CARE EQUIPMENT OR ANY OTHER APPLICATION THE FAILURE OF WHICH COULD LEAD TO DEATH, PERSONAL INJURY OR ENVIRONMENTAL OR PROPERTY DAMAGE. USE OF THE PRODUCTS IN ANY SUCH APPLICATION IS AT THE CUSTOMER'S OWN RISK AND EXPENSE.
3. YAMAHA SHALL ASSUME NO LIABILITY FOR INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OR INJURY THAT MAY RESULT FROM MISAPPLICATION OR IMPROPER USE OR OPERATION OF THE PRODUCT.
4. YAMAHA MAKES NO WARRANTY OR REPRESENTATION THAT THE PRODUCTS ARE SUBJECT TO INTELLECTUAL PROPERTY LICENSE FROM YAMAHA OR ANY THIRD PARTY, AND YAMAHA MAKES NO WARRANTY OR REPRESENTATION OF NON-INFRINGEMENT WITH RESPECT TO THE PRODUCTS. YAMAHA SPECIFICALLY EXCLUDES ANY LIABILITY TO THE CUSTOMER OR ANY THIRD PARTY ARISING FROM OR RELATED TO THE PRODUCTS INFRINGEMENT OF ANY THIRD PARTY'S INTELLECTUAL PROPERTY RIGHTS, INCLUDING THE PATENT, COPYRIGHT, TRADEMARK OR TRADE SECRET RIGHTS OF ANY THIRD PARTY.
5. EXAMPLES OF USE DESCRIBED HEREIN ARE MERELY TO INDICATE THE CHARACTERISTICS AND PERFORMANCE OF PRODUCTS. YAMAHA SHALL ASSUME NO RESPONSIBILITY FOR ANY INTELLECTUAL PROPERTY CLAIMS OR OTHER PROBLEMS THAT MAY RESULT FROM APPLICATIONS BASED ON THE EXAMPLES DESCRIBED HEREIN. YAMAHA MAKES NO WARRANTY WITH RESPECT TO THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR USE AND TITLE.
6. YAMAHA MAKES EVERY EFFORT TO IMPROVE THE QUALITY AND RELIABILITY OF ITS PRODUCTS. HOWEVER, ALL SEMICONDUCTOR PRODUCTS FAIL WITH SOME PROBABILITY. THEREFORE, YAMAHA REQUIRES THAT SUFFICIENT CARE BE GIVEN TO ENSURING SAFE DESIGN IN CUSTOMER PRODUCTS SUCH AS REDUNDANT DESIGN, ANTI-CONFLAGRATION DESIGN, AND DESIGN FOR PREVENTING MALFUNCTION IN ORDER TO PREVENT ACCIDENTS RESULTING IN INJURY OR DEATH, FIRE OR OTHER SOCIAL DAMAGE FROM OCCURRING AS A RESULT OF PRODUCT FAILURE.
7. INFORMATION DESCRIBED IN THIS DOCUMENT: APPLICATION CIRCUITS AND ITS CONSTANTS AND CALCULATION FORMULAS, PROGRAMS AND CONTROL PROCEDURES ARE PROVIDED FOR THE PURPOSE OF EXPLAINING TYPICAL OPERATION AND USAGE. THEREFORE, PLEASE EVALUATE THE DESIGN SUFFICIENTLY AS WHOLE SYSTEM UNDER THE CONSIDERATION OF VARIOUS EXTERNAL OR ENVIRONMENTAL CONDITIONS AND DETERMINE THEIR APPLICATION AT THE CUSTOMER'S OWN RISK. YAMAHA SHALL ASSUME NO RESPONSIBILITY FOR CLAIMS, DAMAGES, COSTS AND EXPENSES CAUSED BY THE CUSTOMER OR ANY THIRD PARTY, OWING TO THE USE OF THE ABOVE INFORMATION.

www.DataSheet4U.com

Notice

The specifications of this product are subject to improvement changes without prior notice.

AGENT

YAMAHA CORPORATION

Address inquiries to:
Semiconductor Sales & Marketing Department

- Head Office 203, Matsunokijima, Iwata,
Shizuoka, 438-0192, Japan
Tel. +81-539-62-4918 Fax. +81-539-62-5054
- Tokyo Office 2-17-11, Takanawa, Minato-ku,
Tokyo, 108-8568, Japan
Tel. +81-3-5488-5431 Fax. +81-3-5488-5088
- Osaka Office 3-12-12, Minami Senba, Chuo-ku,
Osaka City, Osaka, 542-0081, Japan
Tel. +81-6-6252-6221 Fax. +81-6-6252-6229