


PC 2004-G

液晶之友 电话: 020-33819057
Http://www.lcdfriends.com



OUTLINE DIMENSION & BLOCK DIAGRAM

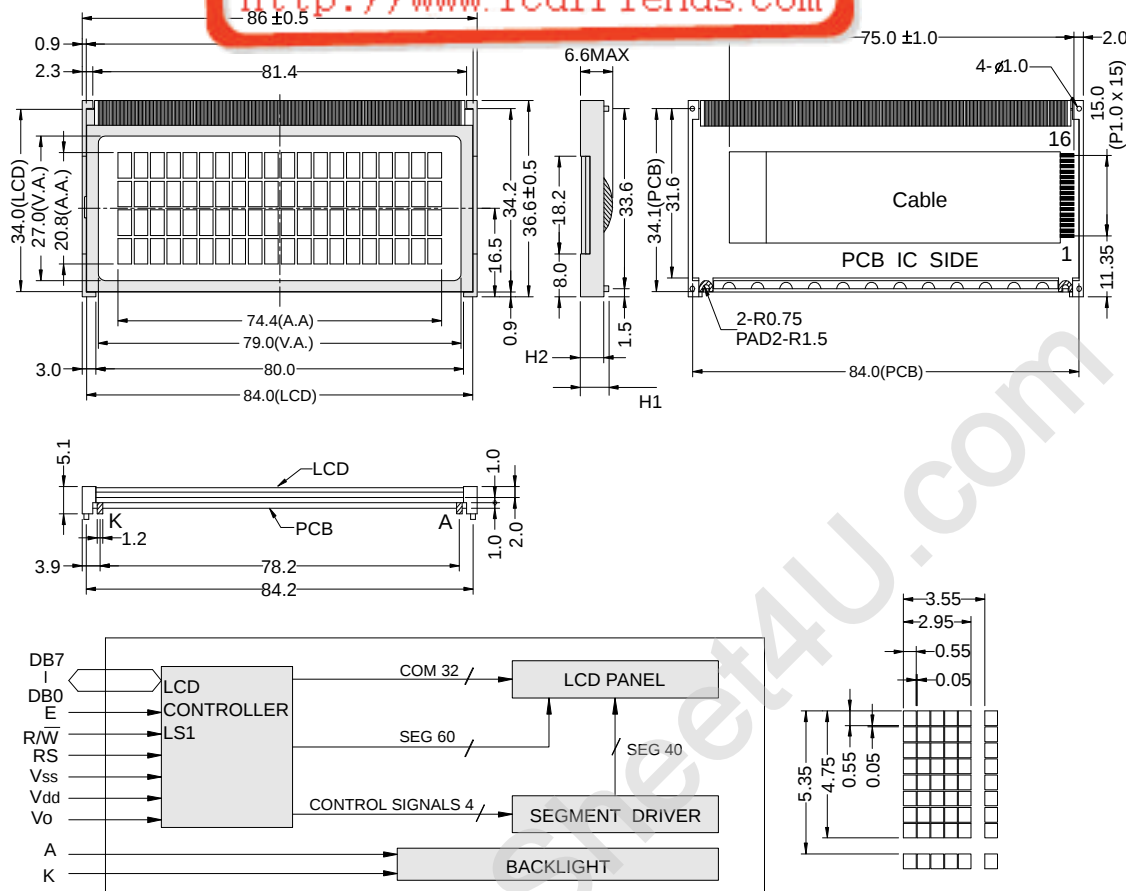

The tolerance unless classified $\pm 0.3\text{mm}$

MECHANICAL SPECIFICATION

MECHANICAL SPECIFICATION			
Overall Size	86.0 x 36.6	Module	H2 / H1
View Area	79.0 x 27.0	W /O B/L	- / -
Dot Size	0.55 x 0.55	EL B/L	- / -
Dot Pitch	0.60 x 0.60	LED B/L	5.1 / 6.1

PIN ASSIGNMENT

Pin no.	Symbol	Function
1	Vss	Power supply(GND)
2	Vdd	Power supply(+)
3	Vo	Contrast Adjust
4	RS	Register select signal
5	R/W	Data read / write
6	E	Enable signal
7	DB0	Data bus line
8	DB1	Data bus line
9	DB2	Data bus line
10	DB3	Data bus line
11	DB4	Data bus line
12	DB5	Data bus line
13	DB6	Data bus line
14	DB7	Data bus line
15	A	Power supply for LED B/L (+)
16	K	Power supply for LED B/L (-)

ABSOLUTE MAXIMUM RATING

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Condition	Min.	Max.	Units
Supply for logic voltage	Vdd-Vss	25°C	-0.3	7	V
LCD driving supply voltage	Vdd-Vee	25°C	-0.3	13	V
Input voltage	Vin	25°C	-0.3	Vdd+0.3	V

ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS									
Item	Symbol	Condition	Min.		Typical		Max.		Units
Power supply voltage	Vdd-Vss	25°C	2.7		—		5.5		V
LCD operation voltage	Vop	Top	N	W	N	W	N	W	V
		-20°C	—	6.5	—	6.8	—	7.1	V
		0°C	4.3	—	4.6	—	4.9	—	V
		25°C	3.9	6.5	4.2	6.7	4.5	6.8	V
		50°C	3.6	—	3.9	—	4.2	—	V
		70°C	—	6.3	—	6.5	—	6.6	V
LCM current consumption (No B/L)	Idd	Vdd=5V	—		2.5		4		mA
Backlight current consumption	LED/edge	VB/L=4.2V	—		60		—		mA
	LED/array	VB/L=4.2V	—		—		—		mA

REMARK

LCD option: STN, TN, FSTN

Backlight Option: LED,EL Backlight feature, other Specs not available on catalog is under request.

