


OUTLINE DIMENSION & BLOCK DIAGRAM

液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

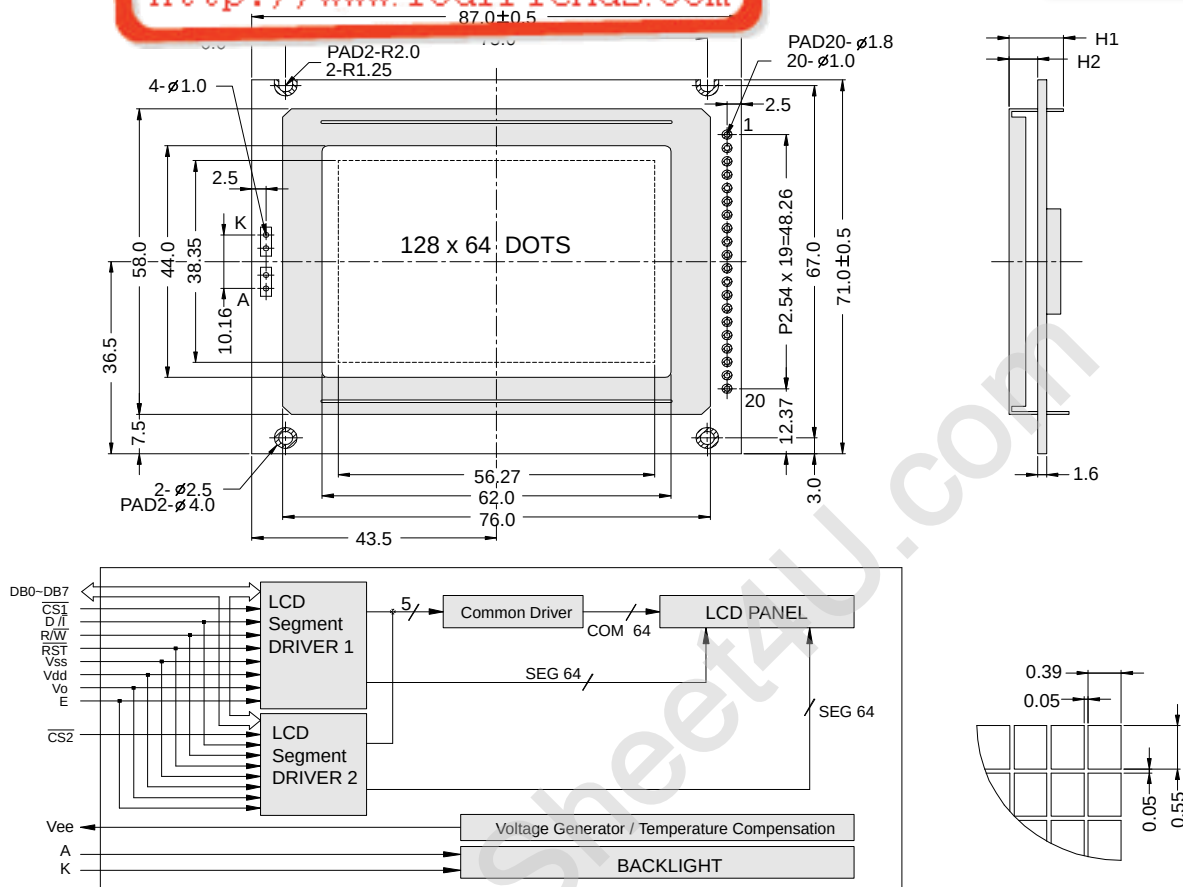

The tolerance unless classified $\pm 0.3\text{mm}$

MECHANICAL SPECIFICATION

Overall Size	87.0 x 71.0	Module	H2 / H1
View Area	62.0 x 44.0	W / O B/L	5.1 / 9.7
Dot Size	0.39 x 0.55	EL B/L	5.1 / 9.7
Dot Pitch	0.44 x 0.60	LED B/L	9.2 / 13.8

PIN ASSIGNMENT

Pin no.	Symbol	Function
1	Vss	Power supply(GND)
2	Vdd	Power supply(+)
3	Vo	Contrast Adjust
4	D/I	Command / data select
5	R/W	Data read / write
6	E	Chip enable signal
7-14	DB0-DB7	Data bus line
15	CS1	Chip select driver 1
17	RST	Reset
18	Vee	Negative voltage output
16	CS2	Chip select driver 1
19	A	Power supply for LED B/L (+)
20	K	Power supply for LED B/L (-)

ABSOLUTE MAXIMUM RATING

Item	Symbol	Condition	Min.	Max.	Units
Supply for logic voltage	Vdd-Vss	25°C	-0.3	7.0	V
LCD driving supply voltage	Vdd-Vss	25°C	-0.3	19.0	V
Input voltage	Vin	25°C	-0.3	Vdd+0.3	V

ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min.	Typical	Max.	Units
Power supply voltage	Vdd-Vss	25°C	4.5	—	5.5	V
LCD operation voltage	Vop	Top	N	W	N	W
		-20°C	—	8.6	—	9.5
		0°C	8.6	—	8.9	—
		25°C	8.1	8.6	8.4	9.5
		50°C	7.7	—	8	—
		70°C	—	8.0	—	8.4
LCM current consumption (No B/L)	Idd	Vdd=5V	—	2.5	5	mA
Backlight current consumption	LED/edge	VB/L=4.2V	—	—	—	mA
	LED/array	VB/L=4.2V	—	390	—	mA

REMARK

LCD option: STN, TN, FSTN

Backlight Option: LED, EL Backlight feature, other Specs not available on catalog is under request.