



1	CS
2	/RES
3	A0
4	/WR
5	/RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	VOUT
17	C3+
18	C1-
19	C1+
20	C2+
21	C2-
22	VRS
23	V1
24	V2
25	V3
26	V4
27	V0
28	C86
29	P/S
30	/HPM

NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. LOGIC VOLTAGE: 3.0V
5. LCD OPERATING VOLTAGE: 9.0V
6. DRIVE METHOD: 1/65 DUTY 1/9 BIAS
7. OPERATING TEMP.: -10°C~+50°C
8. STORAGE TEMP.: -15°C~+60°C
9. CONTROLLER: NT7502H-BDT
10. WITHOUT BACKLIGHT
11. UNMARKED TOLERANCES: ±0.3

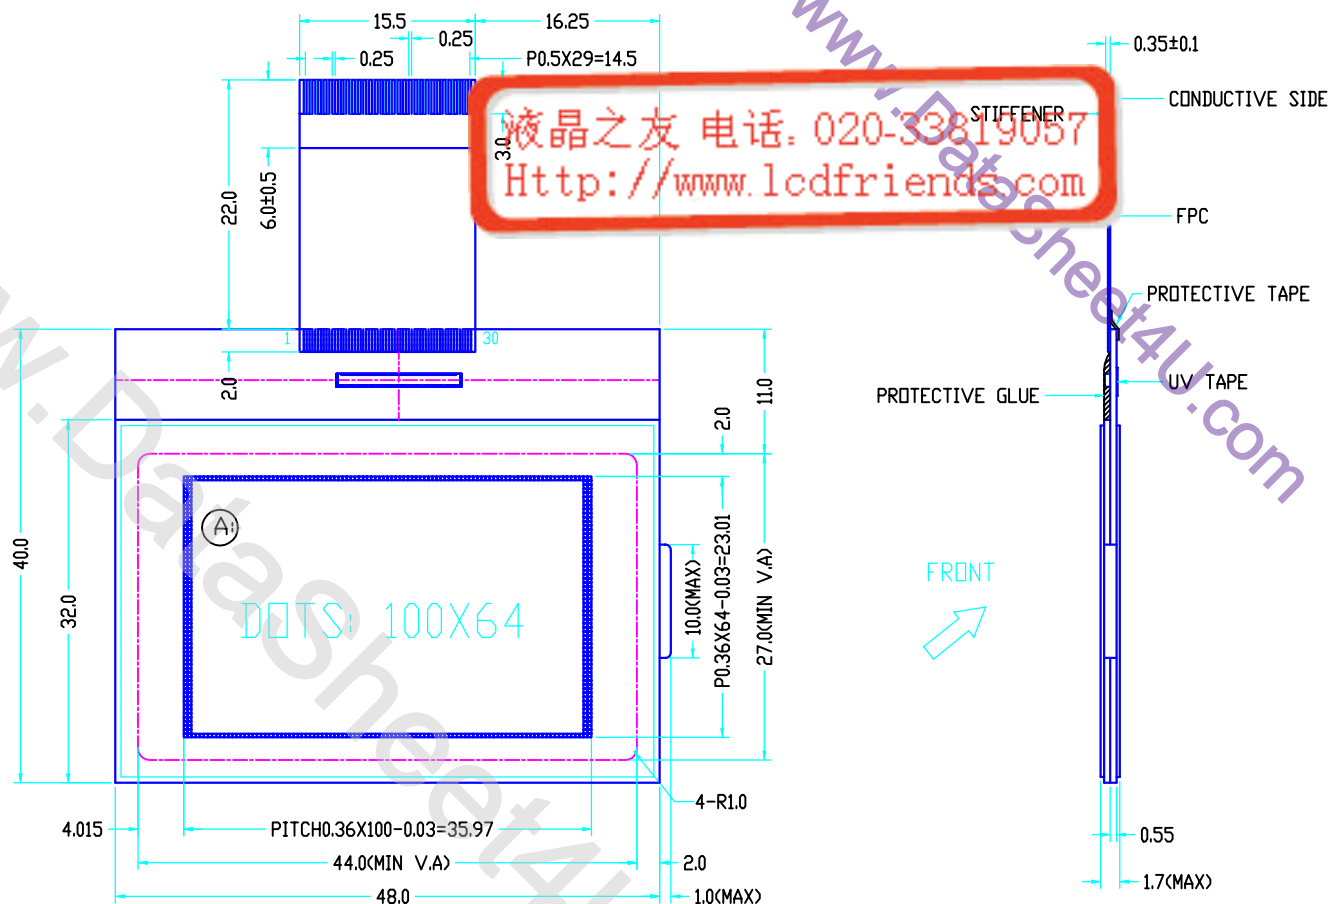

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:		TITLE: TM10064ACIWG	
CHECKED BY:		DWG NO: G-1	
APPROVED BY:		DWG NAME: TM10064ACIWG-1	SCALE:
CONFIRMED BY:		SHEET NO: OF	UNIT: mm