


液晶之友 电话: 020-33819057

Http://www.ledfriends.com

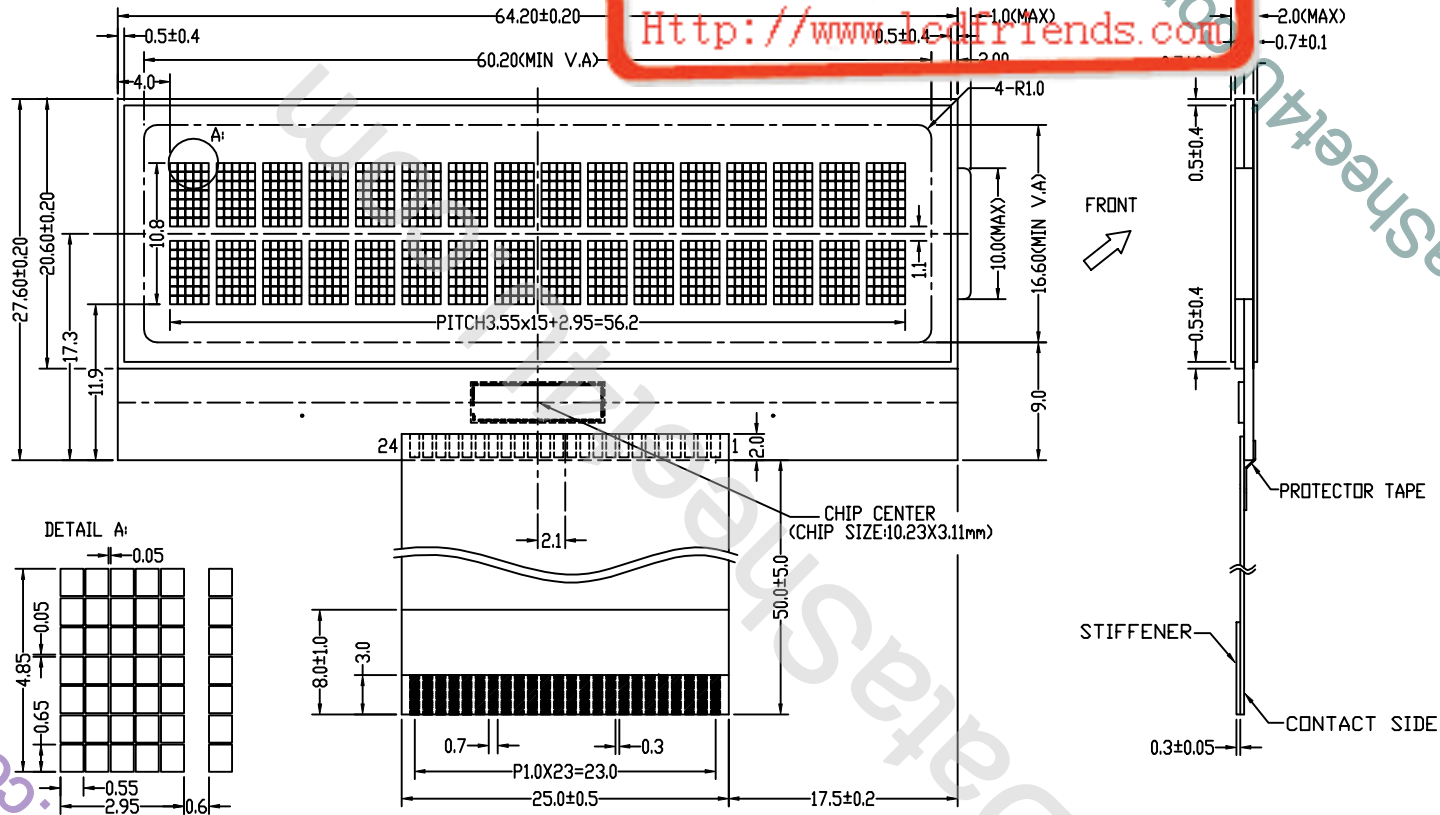

- NOTES:
1. DISPLAY TYPE: YELLOW-GREEN
 2. CHARACTERS: 16 X 2 LINES
 3. VIEWING DIRECTION: 6:00
 4. POLARIZER MODE: REFLECTIVE/POSITIVE
 5. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 6. LCD OPERATING VOLTAGE: 6.5V
 7. VDD=3.0V
 8. OPERATING TEMP.: -20°C~+70°C
 9. STORAGE TEMP.: -30°C~+90°C
 10. CONNECTOR: HEAT-SEAL
 11. FRONT POLARIZER: SHC-125U
 12. REAR POLARIZER: SHC-125M
 12. CONTROLLER: SED1233DGB
 13. UNMARKED TOLERANCES: ±0.3mm
 14. IC COVERED BY SILICONE.

PIN	1	2	3	4	5	6	7	8	9	10	11	12
SYMBOL	A0	WR	CS	D7	D6	D5	D4	D3	D2	D1	D0	VDD
PIN	13	14	15	16	17	18	19	20	21	22	23	24
SYMBOL	VSS	V5	V4	V3	V2	V1	VOUT	VSS	VDD	P/S	IF	RES



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM162EBAWG	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM162EBAWG-1	SCALE:
CONFIRMED BY:	SHEET NO: OF	UNIT: mm