



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

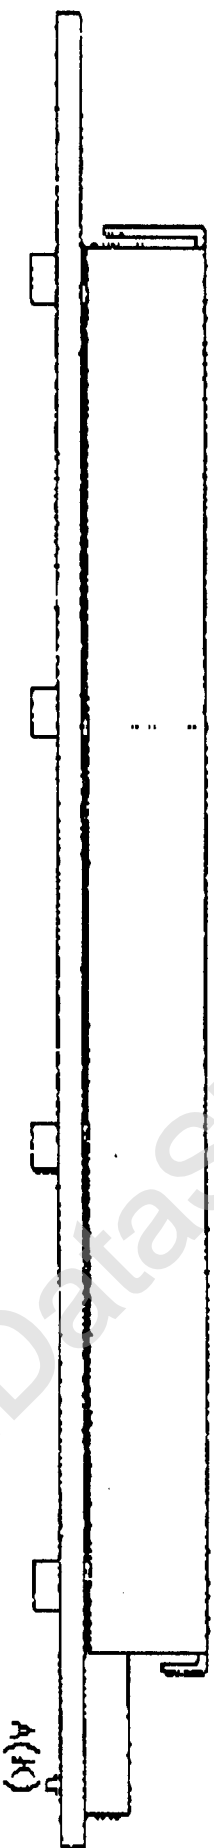

DETAIL A

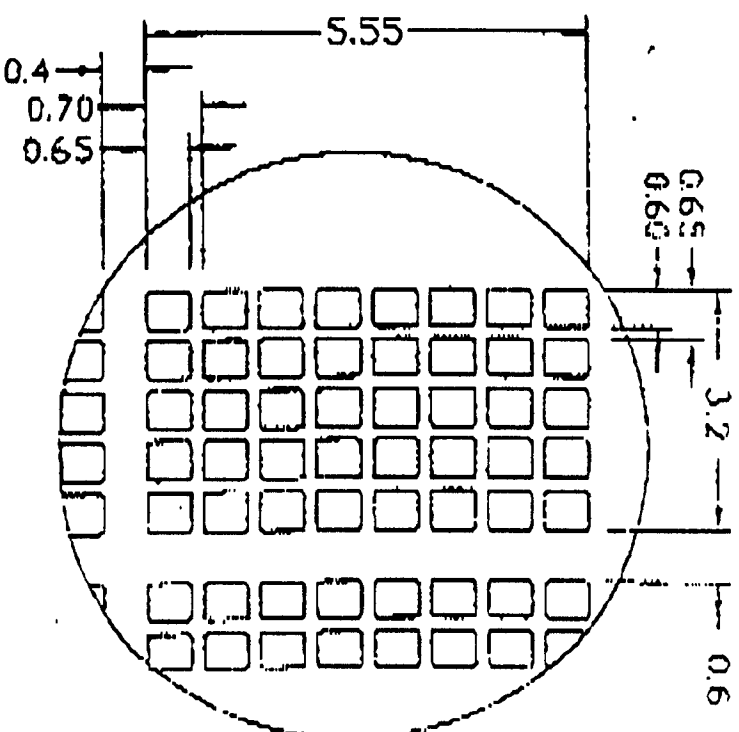

ESTN

- | | |
|-----------------------------|--------------------------------|
| 1. DISPLAY TYPE: | FSTN |
| 2. VIEWING DIRECTION: | 6, 00 |
| 3. POLARIZER MODE: | TRANSPARENT/POSITIVE |
| 4. DRIVE METHOD: | 1/16 DUTY 1/5 BIAS |
| 5. LCD OPERATING VOLTAGE: | 4.7V |
| 6. OPERATING TEMP: | -20°C--+70°C |
| 7. STORAGE TEMP: | -30°C--+80°C |
| 8. CONTROLLER: | S6A0069X01-COCX |
| 9. BACKLIGHT TYPE: | WHITE, 5.0V (TYP.), 30mA (MAX) |
| 10. BEZEL IS TO BE PAINTED | BLACK |
| 11. ALL UNMARKED TOLERANCE: | ±0.3 |

第一冊



TIAN-MA MICROELECTRONICS CO.
EXT. , CASTLE Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: <i>W.P. RB-03</i>	TITLE: TM202JCCW/8	
CHECKED BY: <i>W.P. RB-03</i>	SCALE	
APPROVED BY: <i>W.P. RB-03</i>	DATE	
CONFIRMED BY:		