

# GP2A20/GP2A22

## Light Modulation, Long Focal Distance Type OPIC Photointerrupter

### ■ Features

1. Light modulation type, free from external disturbing light
2. Long focal distance type  
Detecting range  
(GP2A20: 3 to 7mm)  
(GP2A22: 9 to 15mm)
3. Capable of TTL direct connection
4. With 3-pin connector provided for easier interface with peripheral control circuit

### ■ Applications


1. Copiers
2. Laser beam printers
3. Facsimiles

### ■ Line-ups

	Detecting range	
	3 to 7mm	9 to 15mm
Model No.	<b>GP2A20</b>	<b>GP2A22</b>

### ■ Outline Dimensions

(Unit : mm)

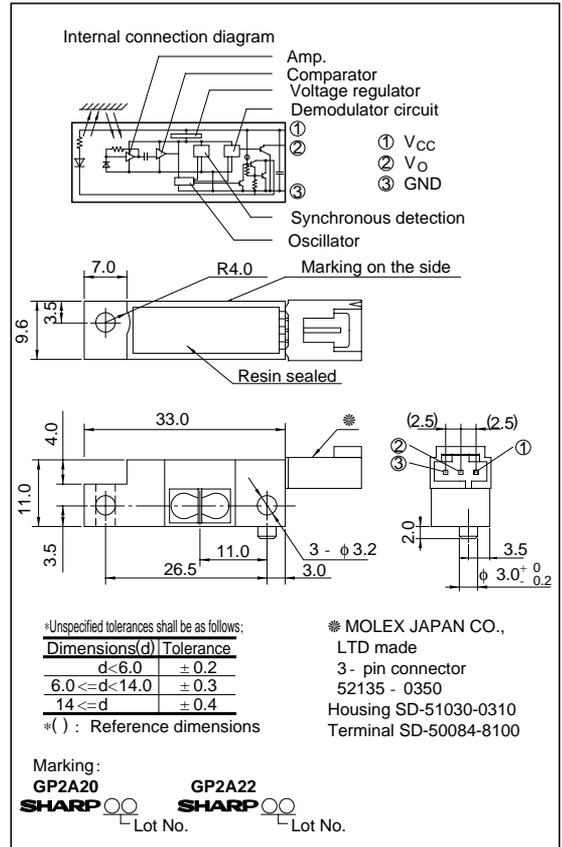

※“OPIC” (Optical IC) is a trademark of the SHARP Corporation.  
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

### ■ Absolute Maximum Ratings (T<sub>a</sub> = 25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	- 0.5 to 7	V
*1 Output voltage	V <sub>O</sub>	30	V
*2 Low level output current	I <sub>OL</sub>	50	mA
*3 Operating temperature	T <sub>opr</sub>	- 10 to + 60	°C
*3 Storage temperature	T <sub>stg</sub>	- 20 to + 80	°C

\*1 Collector-emitter voltage of output transistor

\*2 Collector current of output transistor

\*3 The connector should be plugged in/out at normal temperature.



**■ Electro - optical Characteristics**

( $V_{CC}= 5V, T_a= 25^{\circ}C$ )

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Operating supply voltage		$V_{CC}$		4.75	-	5.25	V	
Dissipation current	Peak pulse value	$I_{cp}$	*4 $r= 1\Omega$	-	-	150	mA	
	Smoothing value	$I_{CC}$	$R_L=\infty$	-	-	30	mA	
Low level output voltage		$V_{OL}$	$I_{OL}= 16mA$ at detecting time	-	-	0.4	V	
High level output voltage		$V_{OH}$	$R_L= 1k\Omega$ at non-detecting time	4.5	-	-	V	
Non-detecting distance	<b>GP2A20</b>	$L_{LHL}$	*5 Reflective object: Kodak 90% reflective paper	-	-	20	mm	
	<b>GP2A22</b>			-	-	50		
Minimum detecting distance	<b>GP2A20</b>	$L_{HLS}$	*5 Reflective object: Chloroprene rubber	-	-	25	mm	
	<b>GP2A20</b>			*5 Reflective object: Artwork tape	-	-		3.0
	<b>GP2A20</b> <b>GP2A22</b>				*5 Reflective object: Kodak 90% reflective paper	-		-
	<b>GP2A22</b>			*5 Reflective object: Black paper		-		-
	<b>GP2A20</b> <b>GP2A22</b>				*5 Reflective object: OHP paper, $\theta = 5deg.$ ( X,Y direction )	-		-
	<b>GP2A20</b> <b>GP2A22</b>			-		-		3.0
Maximum detecting distance	<b>GP2A20</b>	$L_{HLL}$	*5 Reflective object: OHP paper, $\theta = 5deg.$ ( X,Y direction )	7.0	-	-	mm	
	<b>GP2A20</b>			*5 Reflective object: Artwork tape	9.0	-		-
	<b>GP2A20</b> <b>GP2A22</b>				*5 Reflective object: Kodak 90% reflective paper	17.0		-
	<b>GP2A22</b>			*5 Reflective object: Black paper		15.0		-
	<b>GP2A20</b> <b>GP2A22</b>				*5 Reflective object: OHP paper, $\theta = 5deg.$ ( X,Y direction )	7.0		-
	<b>GP2A22</b>			-		-		15.0
Response time	"High→Low" propagation delay time	$t_{PHL}$	*6	-	-	1	ms	
	"Low→High" propagation delay time	$t_{PLH}$		-	-	1	ms	


\*4 Test Condition for Dissipation Current (Peak Pulse Value)

\*5 Test Condition for Detecting Distance Characteristics

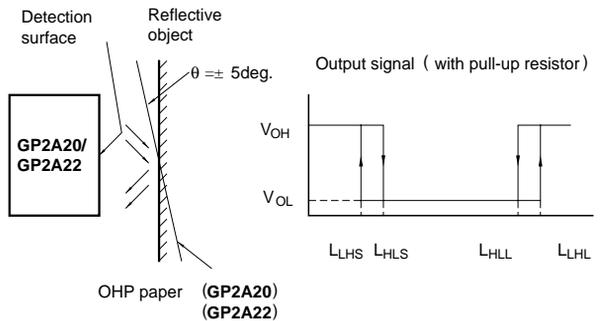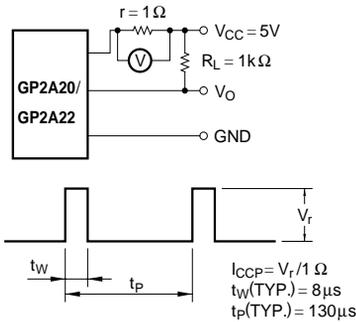


\*6 Test Condition for Response Time


Reflective object : Kodak 90 % reflective paper

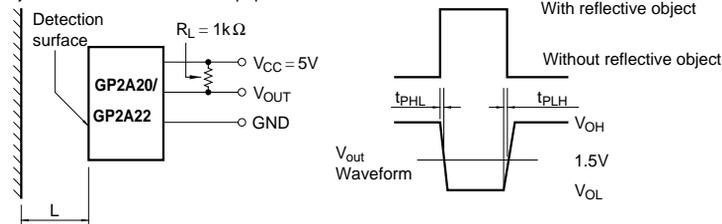


**Fig. 1 Low Level Output Current vs. Ambient Temperature**

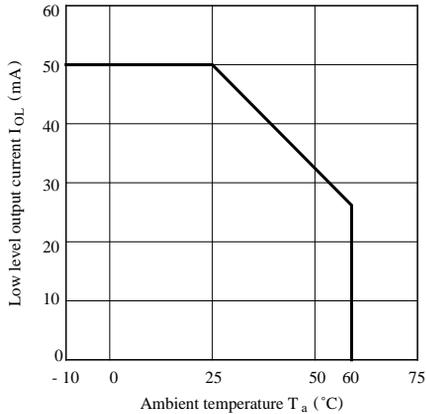


**Fig. 2 Low Level Output Voltage vs. Ambient Temperature**

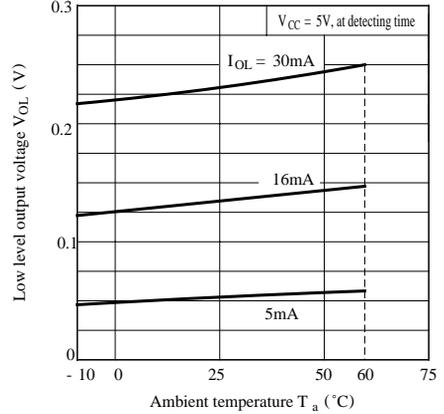

**Fig. 3 Low Level Output Voltage vs. Low Level Output Current**

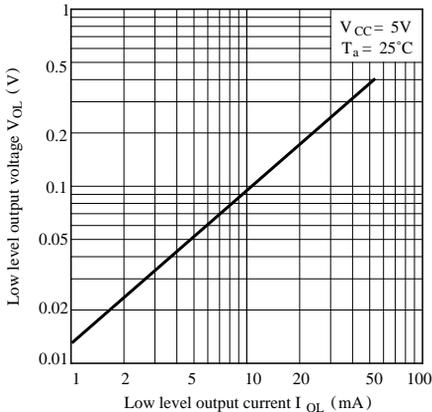

**Fig. 4 Dissipation Current (Smoothing Value) vs. Supply Voltage**

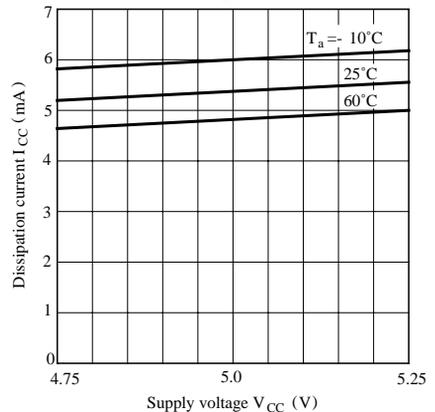

## ■ Precautions for Use

- (1) In order to stabilize power supply line, connect a by-pass capacitor of more than  $0.33\mu F$  between  $V_{CC}$  and GND near
- (2) Please do not perform dip cleaning or ultrasonic cleaning because lens part of this product is an optical device of acrylic resin.
- (3) Remove dust or stains, using an air blower or a soft cloth moistened in cleaning solvent. However, do not perform the above cleaning using a soft cloth with cleaning solvent in the marking portion.

In this case, use only the following type of cleaning solvent used for wiping off:

Ethyl alcohol, Methyl alcohol, Isopropyl alcohol

When the cleaning solvents except for specified materials are used, please consult us.

- (4) As for other general cautions, refer to the chapter "Precautions for Use".