

 TS1086 1.5A Low Dropout Positive Voltage Regulator	
 TO-220  TO-263  TO-252  SOT-223 Pin assignment: 1. Ground / Adj 2. Output 3. Input Pin 2 connect to heatsink	Low Dropout Voltage 1.3V max.

General Description


The TS1086 Series are high performance positive voltage regulators designed for use in applications requiring low dropout performance at full rated current. Additionally, the TS1086 Series provides excellent regulation over variations due to changes in line, load and temperature. Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device. The TS1086 Series are three terminal regulators with fixed and adjustable voltage options available in popular packages.

This series is offered in 3-pin TO-263, TO-220, TO-252 and SOT-223 package.

Features

- ◊ Low dropout performance 1.3V max.
- ◊ Full current rating over line and temperature.
- ◊ Fast transient response
- ◊ ±2% Total output regulation over line, load and temperature
- ◊ Adjust pin current max $90 \mu A$ over temperature
- ◊ Line regulation typical 0.015%.
- ◊ Load regulation typical 0.05%.
- ◊ Fixed/adjustable output voltage
- ◊ TO-220, TO-263, TO-252 and SOT-223 package

Block Diagram

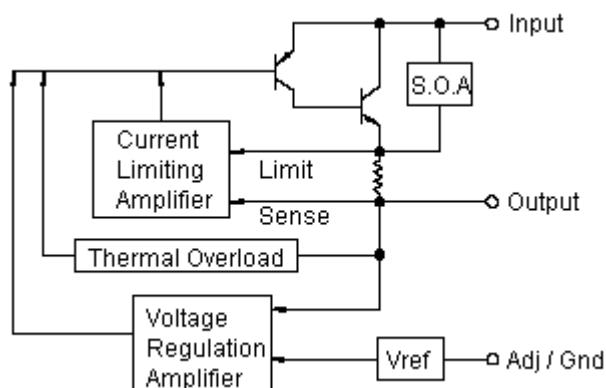

Ordering Information

Part No.	Operating Temp. (Ambient)	Package
TS1086CZxx	-20 ~ +85 °C	TO-220
TS1086CMxx		TO-263
TS1086CPxx		TO-252
TS1086CWxx		SOT-223

Note: Where **xx** denotes voltage option, available are 5.0V, 3.3V, 2.5V and 1.8V. Leave blank for adjustable version. Contact factory for additional voltage options.

Absolute Maximum Rating

Input Supply Voltage	V _{in}	12	V
Operation Input Supply Voltage	V _{in} (operate)	7	V
Power Dissipation	P _D	Internally Limited	W
Operating Junction Temperature Range	T _J	-25 ~ +150	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C
Lead Soldering Temperature (260 °C)		10	S
TO-220 / TO-263 Package		5	
TO-252 / SOT-223 Package			



Electrical Characteristics

T_a = 25 °C, unless otherwise specified. Adjustable version test with V_{out} = 2.5V.

Parameter	Conditions	Min	Typ	Max	Unit
Output Voltage	V _{out} +1.5V ≤ V _{in} ≤ 7V, I _o =10mA	0.990 V _o	5.0 / 3.3 2.5 / 1.8	1.010 V _o	V
	V _{out} +1.5V ≤ V _{in} ≤ 7V, I _o =1.5A	0.980 V _o		1.020 V _o	V
Reference Voltage	(V _{in-out}) =1.5V, I _o =10mA	0.990 V _o	1.25	1.010 V _o	V
	(V _{in-out}) =1.5V, I _o =1.5A	0.980 V _o		1.020 V _o	V
Input Supply Voltage		--	--	7	V
Line Regulation	V _{out} +1.5V ≤ V _{in} ≤ 7V, I _o =10mA	--	0.015	0.2	%
Load Regulation (note 1,2)	V _{in} =V _{out} +1.5V, 10mA ≤ I _o ≤ 1.5A	--	0.05	1.0	%
					%
Dropout Voltage	I _o =1.5A, ΔV _{out} =0.1%V _{out}	--	1.3	1.4	V
Minimum Load Current	V _{in} =5V	--	8	10	mA
Adjustable Pin Current		--	90	--	uA
Current Limit	V _{in} - V _{out} =3V	2.0	--	--	A
Temperature Stability	I _o =10mA	--	0.5	--	%
Ripple Rejection	F = 120Hz, I _o =1.5A C _{out} =25uF, V _{in} =V _{out} + 3V	--	60	70	dB

Thermal Performance

Condition	Package type	Typ	Unit
Thermal Resistance Junction to Ambient	TO-220	45	°C/W
	TO-263	45	
	TO-252	80	
	SOT-223	100	


Note 1: See thermal regulation specification for changes in output voltage due to heating effects. Line and load regulation are measured at a constant junction temperature by low duty cycle pulse testing. Load regulation is measured at the output lead = 1/18" from the package.

Note 2: Line and load regulation are guaranteed up to the maximum power dissipation of 15W. Power dissipation is determined by the input / output voltage difference and the output current. Guaranteed maximum power dissipation will not be available over the full input / output voltage range.


Note 3: Quiescent current is defined as the minimum output current required to maintain the regulation.



Typical Application Circuit

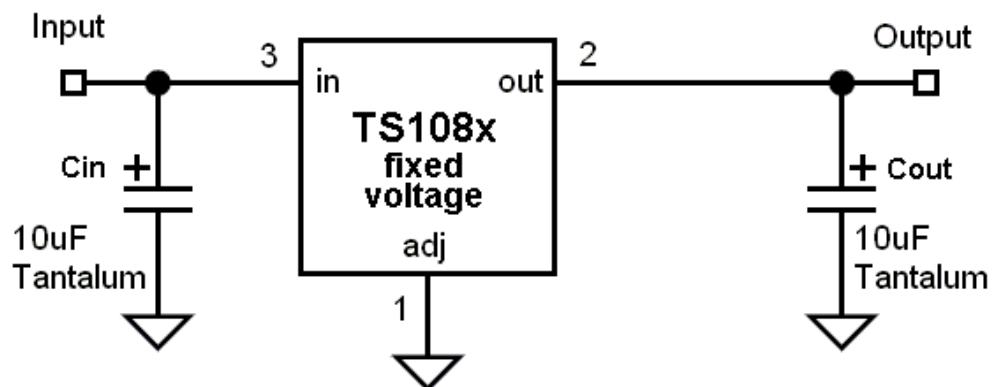

Fixed output voltage version

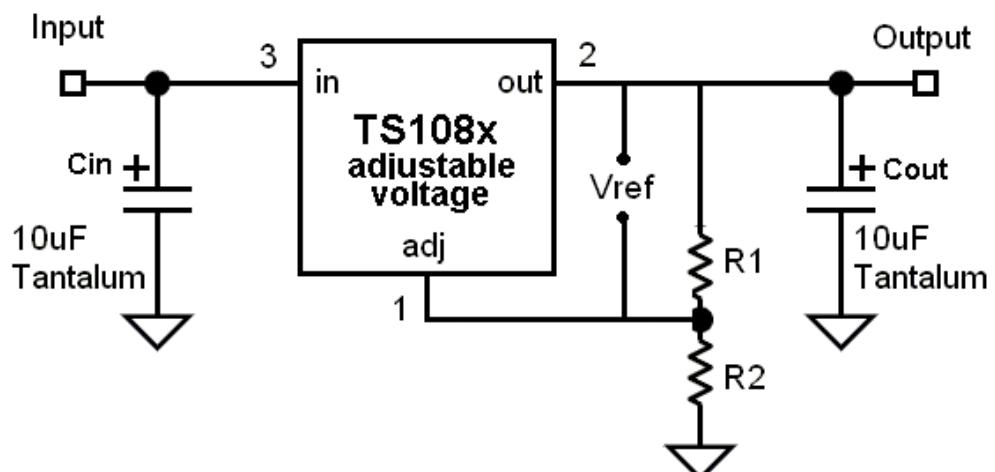

$$V_{out} = V_{ref} \cdot (1 + R_2 / R_1)$$

* Cin is requested if regulator is located

Far from power supply filter

** Design Cout as close to Vout pin as possible

Adjustable output voltage version



Electrical Characteristics Curve

Figure 1: dropout voltage v.s. output current

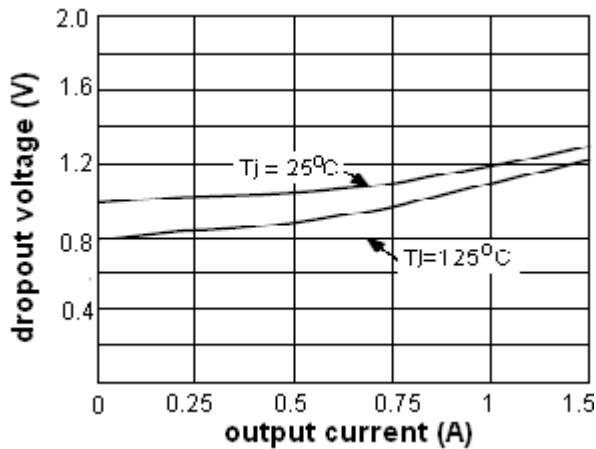


Figure 2: load regulation v.s. temp.

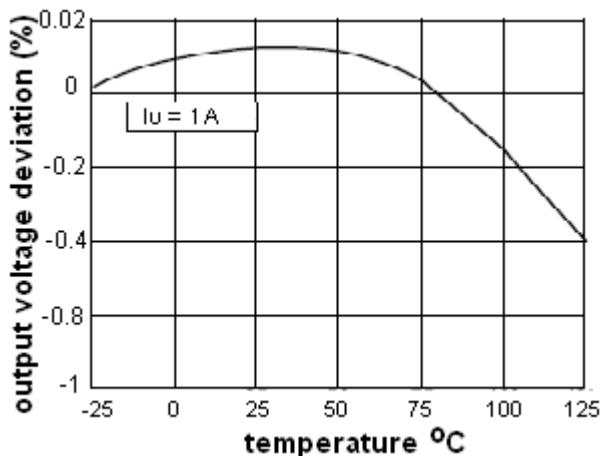


Figure 3: output change v.s. temp.

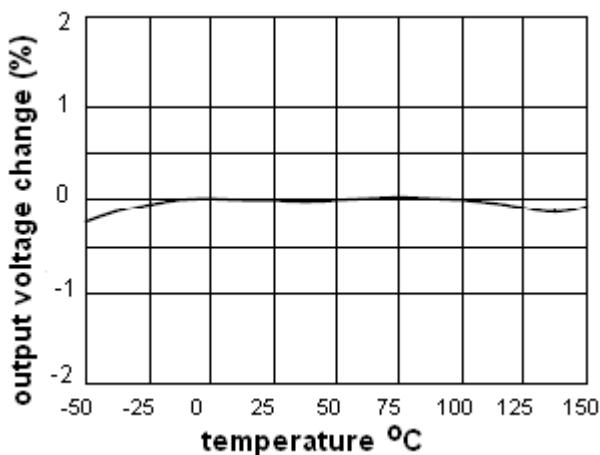


Figure 4: line regulation

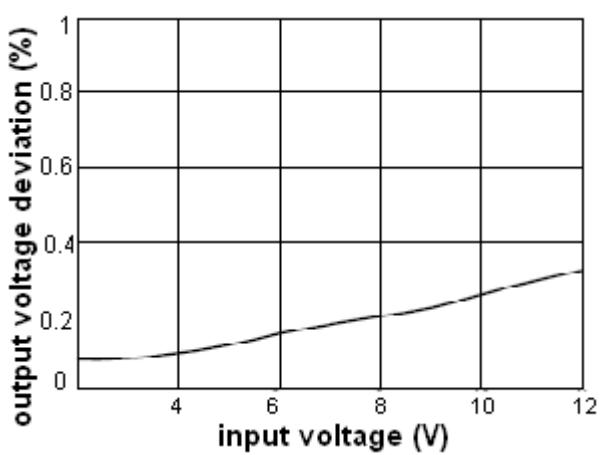


Figure 5: line transient response



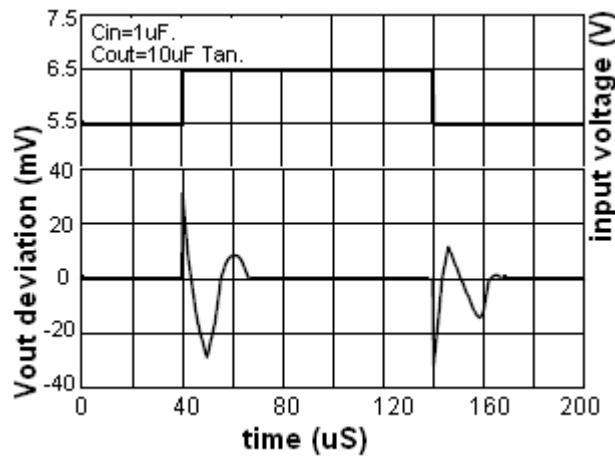


Figure 6: load transient response



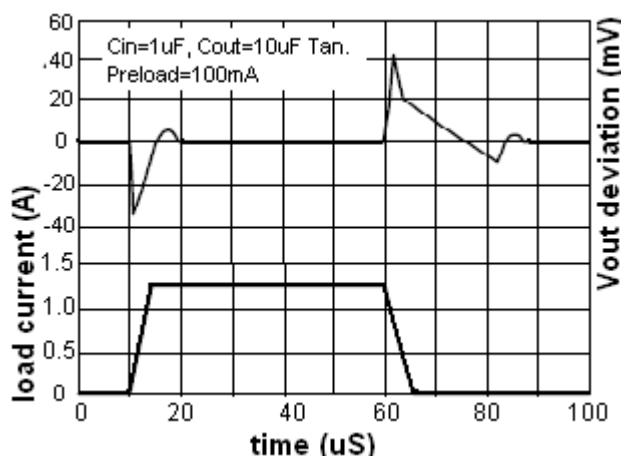


TO-220 Mechanical Drawing

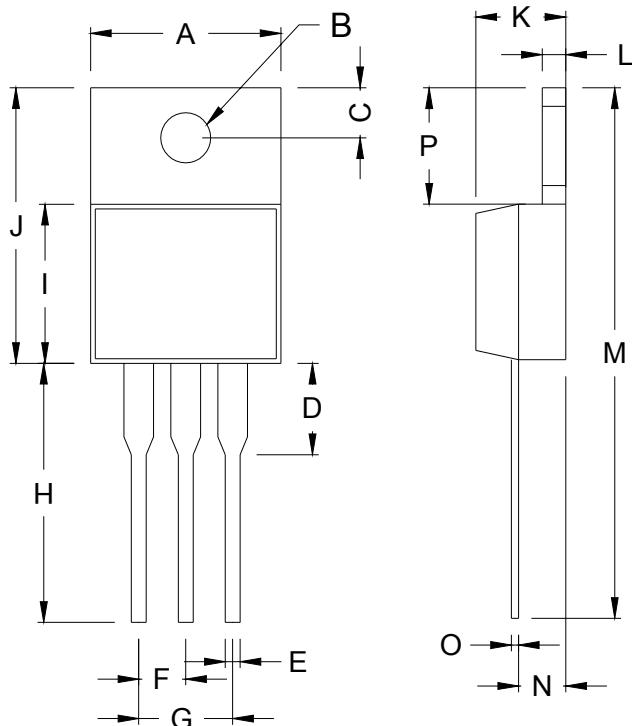

TO-220 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.000	10.500	0.394	0.413
B	3.240	4.440	0.128	0.175
C	2.440	2.940	0.096	0.116
D	-	6.350	-	0.250
E	0.381	1.106	0.015	0.040
F	2.345	2.715	0.092	0.058
G	4.690	5.430	0.092	0.107
H	12.700	14.732	0.500	0.581
I	8.382	9.017	0.330	0.355
J	14.224	16.510	0.560	0.650
K	3.556	4.826	0.140	0.190
L	0.508	1.397	0.020	0.055
M	27.700	29.620	1.060	1.230
N	2.032	2.921	0.080	0.115
O	0.255	0.610	0.010	0.024
P	5.842	6.858	0.230	0.270


TO-263 Mechanical Drawing

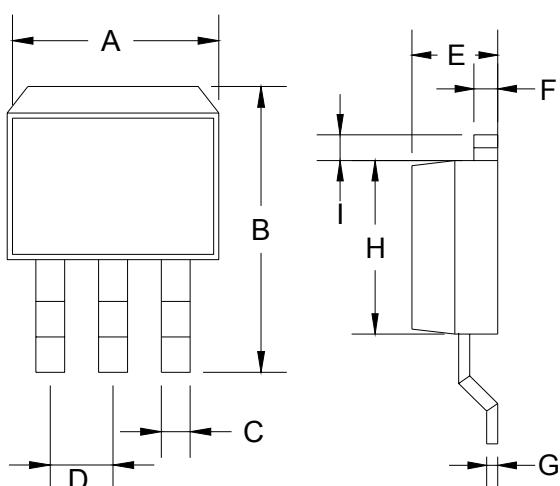

TO-263 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.000	10.500	0.394	0.413
B	14.605	15.875	0.575	0.625
C	0.508	0.991	0.020	0.039
D	2.420	2.660	0.095	0.105
E	4.064	4.830	0.160	0.190
F	1.118	1.400	0.045	0.055
G	0.450	0.730	0.018	0.029
H	8.280	8.800	0.325	0.346
I	1.140	1.400	0.044	0.055
J	1.480	1.520	0.058	0.060




TO-252 Mechanical Drawing

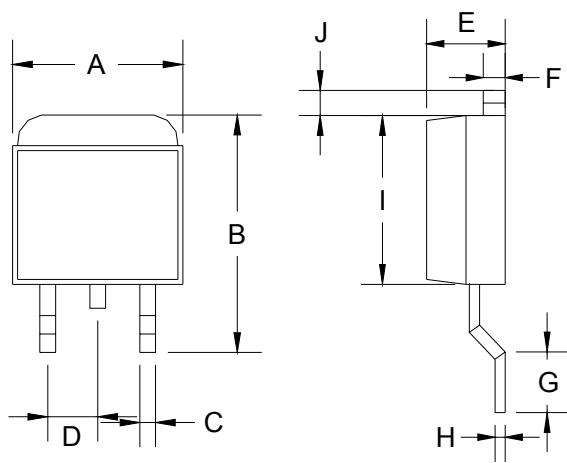

TO-252 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.570	6.840	0.259	0.269
B	9.250	10.400	0.364	0.409
C	0.550	0.700	0.022	0.028
D	2.560	2.670	0.101	0.105
E	2.300	2.390	0.090	0.094
F	0.490	0.570	0.019	0.022
G	1.460	1.580	0.057	0.062
H	0.520	0.570	0.020	0.022
I	5.340	5.550	0.210	0.219
J	1.460	1.640	0.057	0.065

SOT-223 Mechanical Drawing

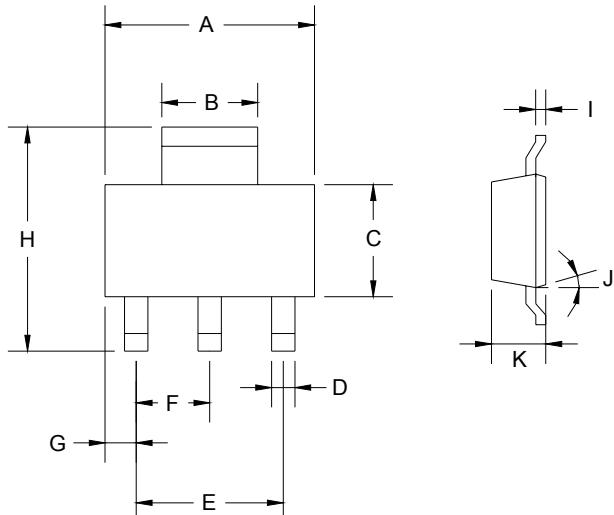

SOT-223 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.350	6.850	0.250	0.270
B	2.900	3.100	0.114	0.122
C	3.450	3.750	0.136	0.148
D	0.595	0.635	0.023	0.025
E	4.550	4.650	0.179	0.183
F	2.250	2.350	0.088	0.093
G	0.835	1.035	0.032	0.041
H	6.700	7.300	0.263	0.287
I	0.250	0.355	0.010	0.014
J	10°	16°	10°	16°
K	1.550	1.800	0.061	0.071