

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

Features

- Low Leakage
- Low Forward Voltage Drop
- High Current Capability
- High Forward Surge Current Capability

Maximum Ratings


- Operating Temperature: -65℃ to +175℃
- Storage Temperature: -65°C to +175°C

1										
			ximum current	Maximum		Maximum DC Blocking				
						•				
	Part Number		Reverse	RMS Voltage		Voltage				
			oltage							
	DR351	1	00V	70V		100V				
	DR352	2	200V	140V		200V				
	DR353 3		V00	210V		300V				
	DR354	DR354 4		280V		400V				
	DR356	6	00V	420V		600V				
E	Electrical Characteristics @ 25°C Unless Otherwise Specified									
	Average Forwa	Average Forward Current		35A	T _C = 105℃					
	Current									
	Peak Forward Surge		I _{FSM}	400A	8.3ms, half sine					
	Current									
	Maximum		VF	1.15V	I _{FM} =80A					
	Instantaneous									
	Forward Voltage									
	Maximum DC		I _R	5μΑ	T _A = 25°C					
	Reverse Current At			350μA	T _C = 100°C					
	Rated DC Blocking			•	Ŭ					
	Voltage									
	Rating for Fusing		l ² t	664 A ² S	t<8	t<8.3ms				
	Typical Thermal		R _{0JC}	0.8℃/W	No	Note 1				
	Resistance									
	Nate 1, et 0.5" (12.7) lead length (D.C.D. mounted)									

Note 1: at 0.5" (12.7) lead length(P.C.B. mounted)

DR351 THRU DR356

35 Amp Automotive Rectifier 100 to 600 Volts

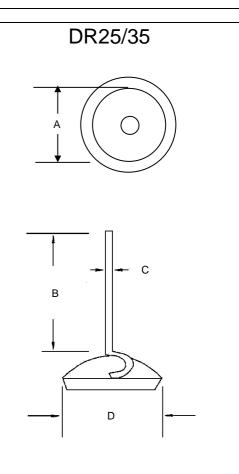

DIMENSIONS										
	INCHES		ММ							
DIM	MIN	MAX	MIN	MAX	NOTE					
Α		5.500		33.00						
В	.710	.780	18.00	20.00						
С	.057	.065	1.45	1.65						
D	.370	.390	9.50	9.90						
				•						

www.mccsemi.com



Micro Commercial Components

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by Micro Commercial Components Corp. are not intended for use in Medical,

Aerospace or Military Applications.

