

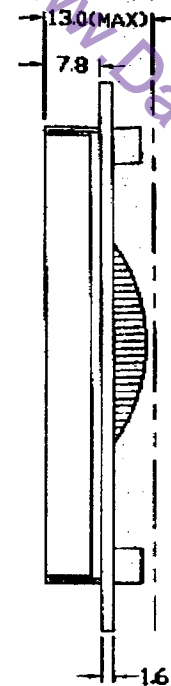


液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

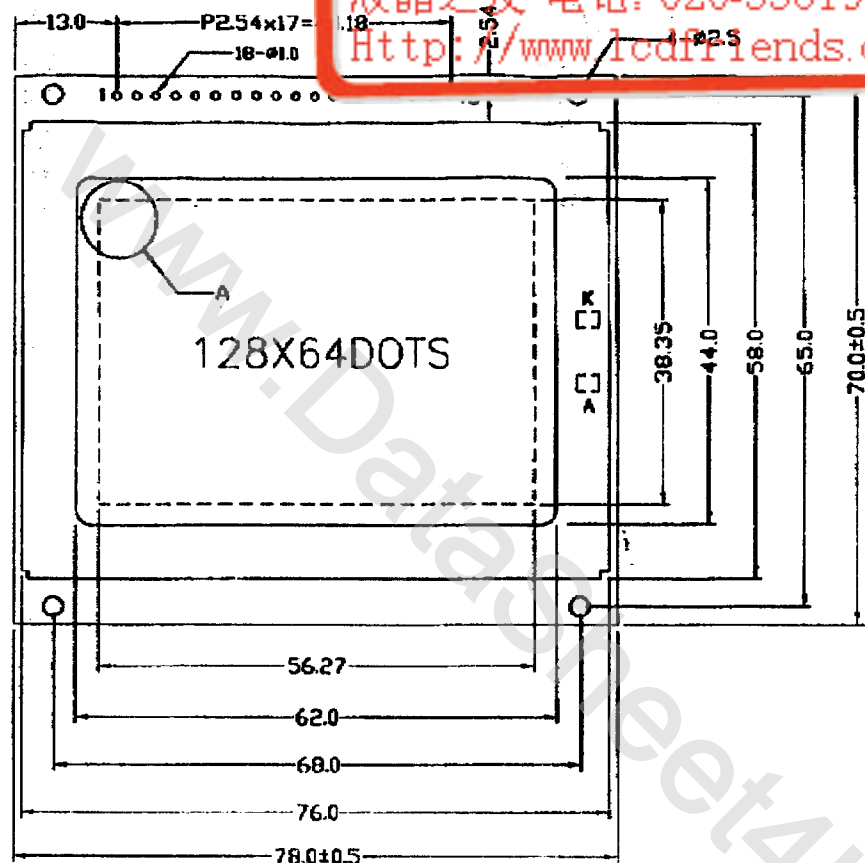

DETAIL A:



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
/CSA/CSB	GND	VCC	VO	D/I	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K	

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW GREEN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSMISSIVE/POSITIVE
- 4.DRIVE METHOD: 1/64 DUTY 1/9 BIAS
- 5.OPERATING TEMP: 0°C~+50°C
- 6.STORAGE TEMP: -20°C~+60°C
- 7.CONTROLLER: S6B0108A01-COCX(KS0108BPCC)
- 8.BACKLIGHT TYPE: LED
- 9.LCD OPERATING VOLTAGE: 12.6V
- 10.BEZEL IS TO BE PAINTED BLACK
- 11.UNMARKED TOLERANCES: ±0.3mm



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 李永强	DATE: 2004-10-28	TITLE: TM12864FBF6	SCALE: 1:1
CHECKED BY: 李永强	DATE: 2004-10-28	DWG NO: G-1	UNIT: mm
APPROVED BY: 李永强	DATE: 2004-10-28	DWG NAME: TM12864FBF6G-1	SHEET NO: 01
CONFIRMED BY: 李永强	DATE: 2004-10-28		