

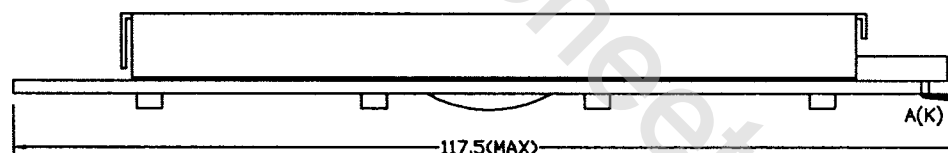


液晶之光 电话: 020-33819057
[Http://www.ledfriends.com](http://www.ledfriends.com)

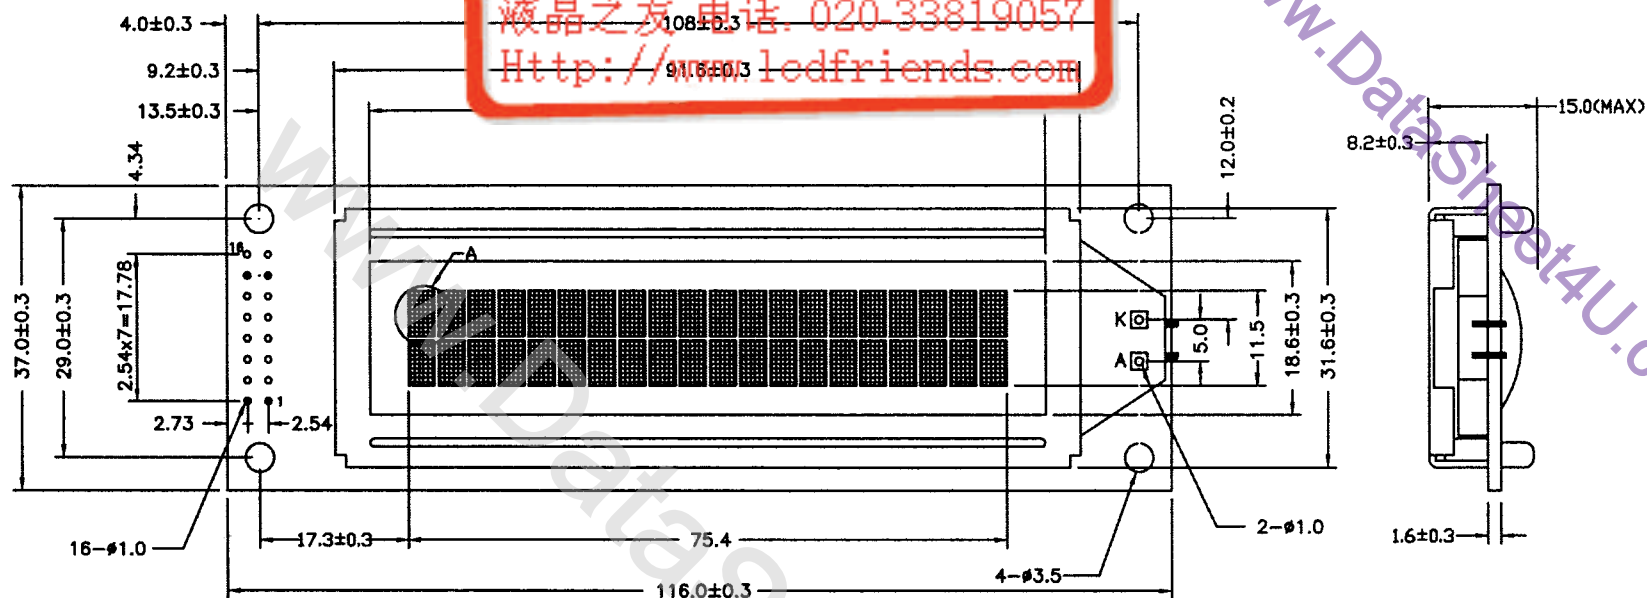

DETAIL A:

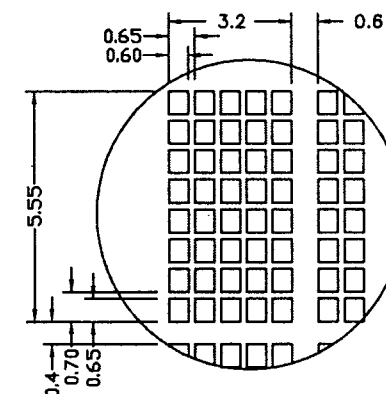

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

- NOTES:
- 1.DISPLAY TYPE: STN/GRAY MODE
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
 - 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 - 5.LCD OPERATING VOLTAGE: 4.7V
 - 6.OPERATING TEMP: -20°C~+70°C
 - 7.STORAGE TEMP: -30°C~+80°C
 - 8.CONTROLLER: S6A0069X01-C0CX
 - 9.BACKLIGHT TYPE: LED(4.2V DC,YELLOW)
 - 10.BEZEL IS TO BE PAINTED BLACK
 - 11.ALL UNMARKED TOLERANCES: ±0.3



TIAN-MA MICROELECTRONICS CO.

22/F., HANDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	BY:	TITLE: TM202JDCW6	
CHECKED BY:	BY:	SCALE	
APPROVED BY:	BY:	DWG NO: G-1	
CONFIRMED BY:	BY:	DWG NAME: TM202JDCW6-1	
			SHEET NO: 0F