

## Features

- +5 dBm Output Level at 2000 MHz
- Channel Step Size : 5000 kHz
- 2<sup>nd</sup> Harmonic : < -30 dBc
- Spurious Level : < -70 dBc
- Lock Time : < 10 ms
- 35 mA Current Consumption

## Description

The plerow<sup>TM</sup> PLL synthesizer module was designed for use in wireless and wireline systems in a wide range of frequency from 50 MHz to 6 GHz. ASB's PLL provides exceptionally low spurious and phase noise performance with fast locking time and low current consumption. All products are available in a surface-mount type package.



## Specifications

Parameter	Unit	Min.	Typical	Max.
Frequency Range	MHz		2000	
Output Power	dBm	4	5	6
Supply Voltage	V	4.7	5.0	5.3
Current Consumption	mA		35	45
Channel Step Size	kHz		5000	
2 <sup>nd</sup> Harmonics	dBc		-40	-30
Spurious Level	dBc		-78	-70
Lock Time	ms		3	10
Reference Frequency	MHz			
Reference Input Level	dBm			
Phase Noise (C / N)				
@ 1 kHz			-80	-75
@ 10 kHz	dBc/Hz		-104	-100
@ 100 kHz			-118	-115
Output Impedance	$\Omega$		50	
Operating Temp. Range	°C	-40	25	85
Package Type & Size	mm	SMT, 19.0W×19.0L×5.8H		

1) Measurement conditions are as follows: T = 25°C, V<sub>CC</sub> = 5 V, Freq. = 2000 MHz, 50 ohm system.


## More Information

Website: [www.asb.co.kr](http://www.asb.co.kr)  
E-mail: [sales@asb.co.kr](mailto:sales@asb.co.kr)

Tel: (82) 42-528-7220  
Fax: (82) 42-528-7222

ASB Inc., 4th Fl. Venture Town  
Bldg., 367-17 Gojeong-Dong,  
Seo-Gu, Daejeon 302-716, Korea

## Outline Drawing

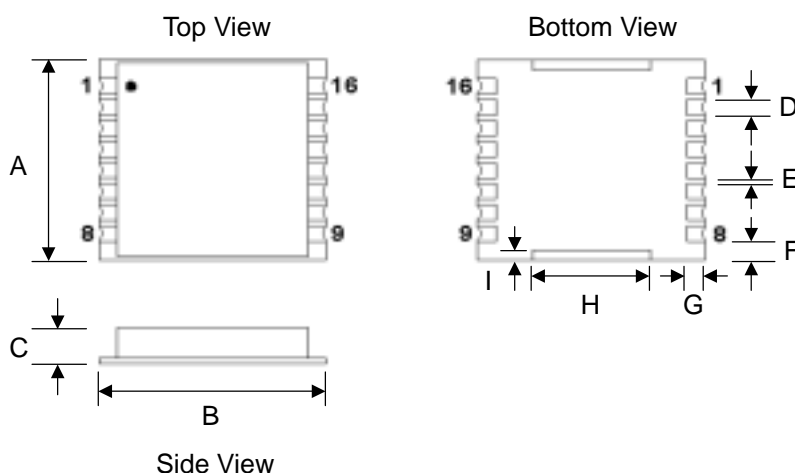

Pin Configuration	
1	Ground
2	Ground
3	Ground
4	Ground
9	VCC (VCO)
13	RF OUT
15	VCP (PLL)
16	LOCK DETECT
Others	Ground

Dimension (mm)	
A	19.0
B	19.0
C	5.8
D	1.5
E	0.5
F	1.75
G	1.35
H	15.0
I	0.9

Tolerance:  $\pm 0.2$