

BL2348 GPON Processor


Part of the Alto processor family, the BL2348 is a low power and cost effective SoC targeting intelligent GPON Gateway service application processing in high performance access networks. The BL2348 incorporates the industry's most advanced interfaces including Gigabit Ethernet, VoIP DSP and PCI, along with unrivaled QoS, security and hardware acceleration. Integrated with the innovative dual core Runner™ network processor, the BL2348 enables unmatched service application flexibility with benchmark performance. Its instruction set has been designed from the ground up and is optimized to accelerate services and networking over a wide range of protocols and traffic management models, while maintaining up to 1Gbps routing throughput.

With industry-standard operating systems and software toolchains, BL2348 also integrates a MIPS32 for demanding application processing. An on-board DSP enables toll quality voice of simple, complex, and wideband CODECs, with a proven and comprehensive telephony feature set. BroadLight's GPON RG solution also includes the GateMakerPro software package allowing developers to implement production grade products quickly and with low-risk.

Decoupling the data, control, and voice planes, the SoC architecture maximizes throughput performance while maintaining all host and peripheral application tasks. The architecture enables new data path functionality to be added to the Runner™ network processor, guaranteeing versatility, scalability and a long product life cycle.

FEATURES

- ▶ Single chip solution for GPON residential gateway
- ▶ Flexible high performance network processor
- ▶ TCP/IP/UDP acceleration engine enables wire-speed throughput
- ▶ Hardware security engine enables high-performance VPN tunneling, IPSec encryption/decryption, authentication
- ▶ PCI bus interface to support 4 external peripheral components such as 802.11b/g/n
- ▶ Single low-cost clock source 19.44 MHz crystal reduces overall system cost and simplifies design
- ▶ Single low cost DDR2 memory
- ▶ GateMaker software suite is a proven and comprehensive package enabling quick and low-risk development
- ▶ RTOS platform independent with complete toolchain
- ▶ ANSI C source code for configuring, provisioning, performance and fault monitoring of all device resources
- ▶ Industry standard development and debugging environment

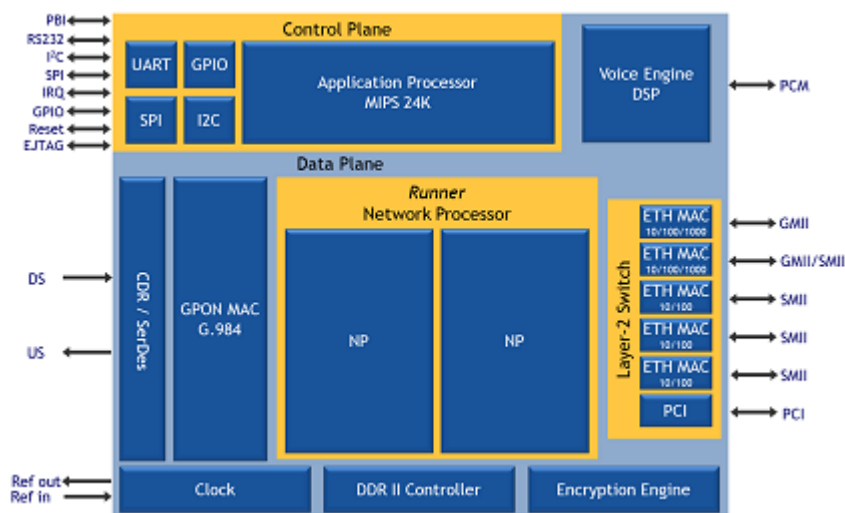

BL2348 SPECIFICATIONS

Dual Core Runner™ Network Processor

- ▶ Performance optimized for CPE service networking
- ▶ Flexible filtering, classification, remarking and packet modification
- ▶ Advanced traffic management and QoS
- ▶ NAT, Firewall, TCP/IP/UDP accelerators
- ▶ Comprehensive and simultaneous IPv6 and IPv4 support
- ▶ IPSec, SSL, DES, 3DES, AES, SHA1, MD5

Gig Class Performance

- ▶ Up to 2 Gbps full duplex Layer-2
- ▶ Up to 1Gbps full duplex Layer-3/4 with NAT/FW and PPPoE
- ▶ 16K session with NAT/FW
- ▶ No performance degradation over multiple sessions

CPU


- ▶ MIPS32 24K RISC core with MMU
- ▶ 4-way, 16 KB instruction and 16 KB data cache

Integrated I/Os

- ▶ 5 Configurable Ethernet MACs: 2GbE or 4FE+1GbE
- ▶ 32 bit/33 MHz PCI Host Rev 2.3
- ▶ PCM highway
- ▶ 16 bit/66 MHz local bus
- ▶ UART, SPI, I²C
- ▶ GPIOs

VoIP DSP

- ▶ Up to 4 voice ports
- ▶ G.711, G.722, G.723.1, G.726, G.729A/B, G.722.2
- ▶ G.168 echo cancellation
- ▶ T.38 fax relay
- ▶ Tone and comfort noise generator
- ▶ Voice activity detection
- ▶ Comprehensive telephony features

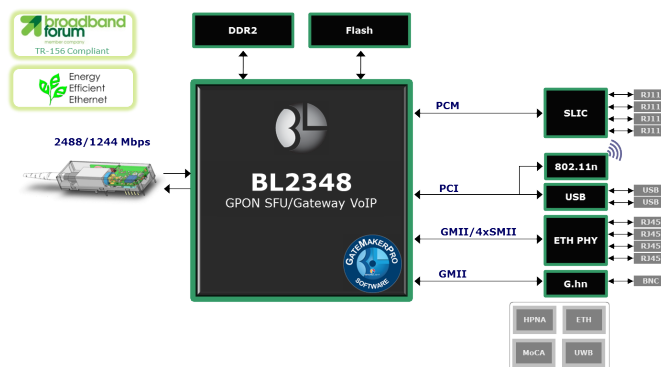

Low Power

- ▶ Intelligent power management
- ▶ 0.9 W typical

Physical

- ▶ 19x19 mm BGA-441
- ▶ Industrial grade -40°C to +85°C

For more information visit our website at: **www.broadlight.com**

USA	2901 Tasman Drive, Suite 218, Santa Clara, CA 95054 USA, Tel: +1-408-982-4215, Fax: +1-408-982-4220
Taiwan	7th Fl. No. 50, Lane 10, Kee Hu Road, Nei Hu District, Taipei, Taiwan 114, Tel: +886-2-2659-6768
Korea	Cylux Building West, Room 921, 716 Suseo-Dong, Gangnam-Gu, Seoul, Korea, Tel/Fax: +82-2-2149-8400
China	258 Yuyuan Road, Room 1109, Shanghai, 200050 China, Tel: +86-21-6125 2135, Fax: +86-21-6125-0510
Israel	7 Sapir Street, Herzliya Pituah, 46852 Israel, Tel: +972-9-959-3666, Fax: +972-9-959-3665