

CM1000, 1500, 2500, 3500 SERIES

HIGH CURRENT SILICON BRIDGE RECTIFIERS


VOLTAGE - 50 to 800 Volts CURRENT - 10 to 35 Amperes

CM-25

CM-25W

FEATURES

- Electrically Isolated Metal Case for Maximum Heat Dissipation
- Surge Overload Ratings to 400 Amperes
- These bridges are on the U/L Recognized Products List for currents of 10, 25 and 35 amperes

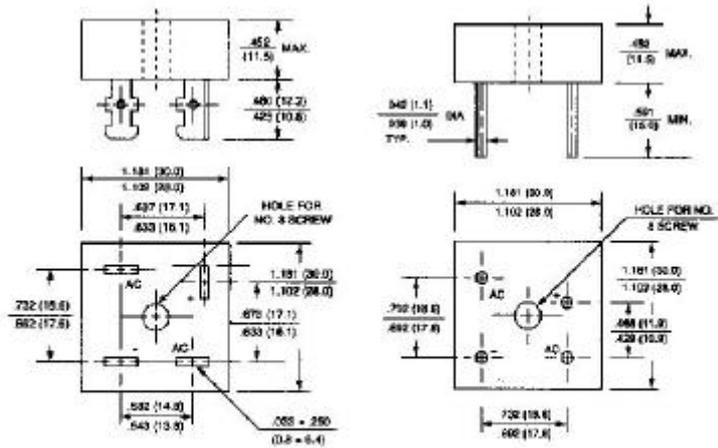

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: Metal, electrically isolated
 Terminals: Plated .25" FASTON
 or wire Lead 40 mils
 Weight: 1 ounce, 30 grams
 Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

		-00	-01	-02	-04	-06	-08	UNITS
Max Recurrent Peak Reverse Voltage		50	100	200	400	600	800	V
Max RMS Input Voltage		35	70	140	280	420	560	V
Max DC Blocking Voltage		50	100	200	400	600	800	V
Max Average Forward Current* for Resistive Load at TC=55	CM10 CM15 CM25 CM35			10 15 25 35				A A A A
Non-repetitive Peak Forward Surge Current at Rated Load	CM10 CM15 CM25 CM35			200 300 300 400				A A A A
Max Forward Voltage per Bridge Element at Specified Current	CM10 5A CM15 I _F 7.5A CM25 12.5A CM35 17.5A			1.2				V
Max Reverse Leakage Current at Rated DC Blocking Voltage				10				A
I ² t Rating for fusing (t < 8.3ms)	CM10 CM15 / CM35 CM25			374 / 664				A ² s

Typical Thermal Resistance (Fig. 3) R_{JC}	2.5	/W
Operating Temperature Range T_J	-55 to +150	
Storage Temperature Range T_{STG}		

NOTES:

* Unit mounted on metal heat-sink

RATING AND CHARACTERISTIC CURVES CM1000 THRU CM3500

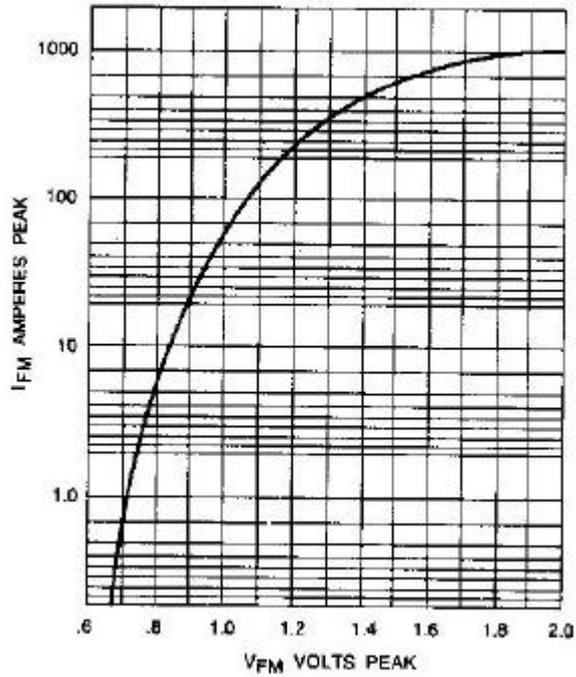


Fig. 1-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS AT $T_J=25$

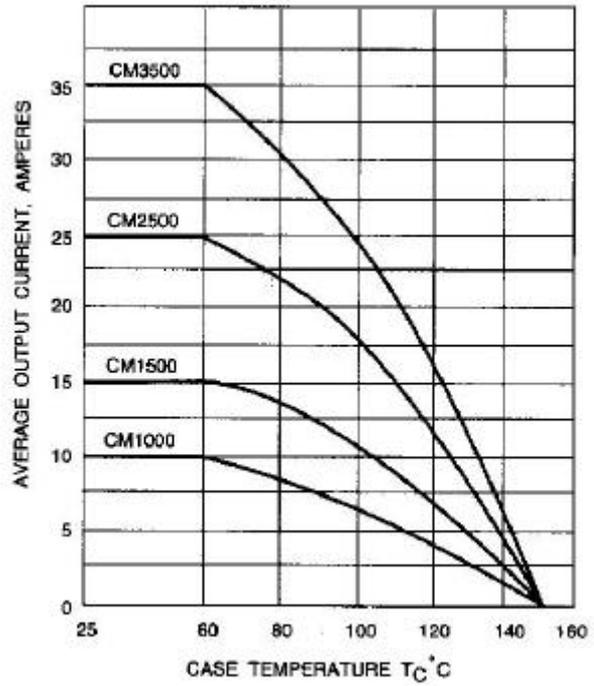


Fig. 2-OUTPUT CURRENT VS. CASE TEMPERATURE RESISTIVE OR INDUCTIVE LOAD $T_J=150$

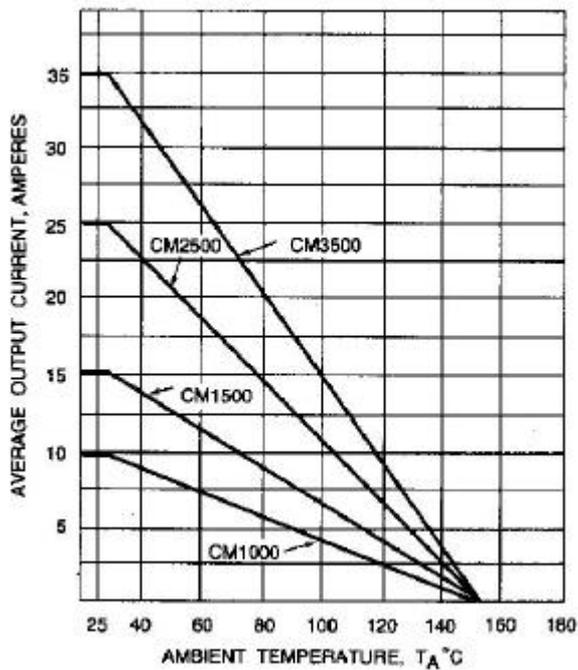


Fig. 3-OUTPUT CURRENT VS. AMBIENT TEMPERATURE RESISTIVE OR INDUCTIVE LOAD BRIDGE MOUNTED ON A8"×8" ALUMINUM PLATE 25" THICK

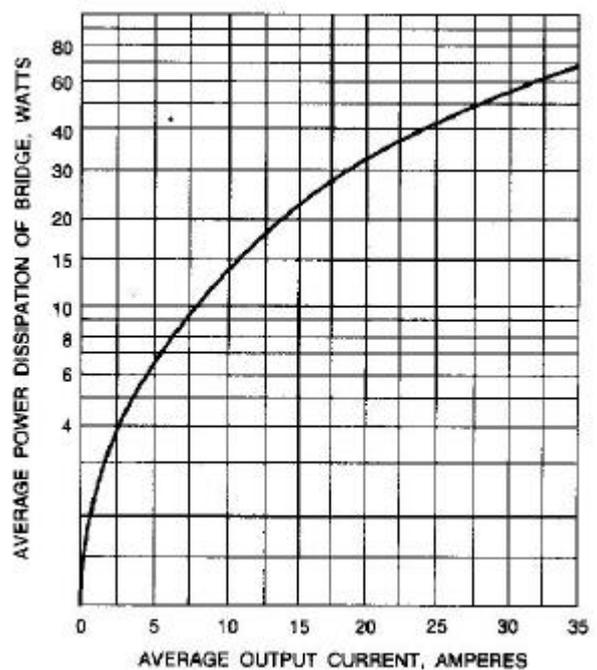


Fig. 4-POWER DISSIPATION VS. AVERAGE OUTPUT CURRENT RESISTIVE OR INDUCTIVE LOAD, $T_J=150$