

FTA series(40,50,60A)

FTA -50 -683 -□

① ② ③ ④

① Model Name

② Rated Current

③ Line to ground capacitor code: See table 1.1.

table 1.1 Line to ground capacitor code

Code	Leakage Current (Input 250/500V 60Hz) (335 only 250/400V 60Hz)	Line to ground capacitor (nominal value)
223	1.0mA/2.0mA max	22,000pF
683	2.5mA/5.0mA max	68,000pF
104	3.5mA/7.0mA max	100,000pF
335	160mA/250mA max	3.3μF

* When the line to ground capacitor code is different, the attenuation characteristic is different.

④ Option

H: Ultra high-attenuation type

"335" is not applied.

G: With switch of line to ground capacitor

Only "335" is applied.

* Leakage current 160mA/250mA max when the switch state is ON (switched to "I"). 10 μA/16μA max when the switch state is OFF (switched to "O").

Features of FTA series

Book type (Space-saving type)

- 1-stage filter General-purpose High-attenuation (150kHz - 1MHz)
- Selectable leakage current value, Ultra high attenuation type "335" for EU (Wye type with neutral earth system), With switch of line to ground capacitor "-G"

Specifications

No.	Items	FTA-40-683	FTA-50-683	FTA-60-683
1	Rated Voltage[V]	AC Three Phase 500 (voltage range: 528 max) *1		
2	Rated Current[A]	40	50	60
3	Test Voltage (Terminal-Mounting Plate)	2,500 VAC (Cutoff Current = 100mA), 1minute at room temperature and humidity *2		
4	Isolation Resistance (Terminal-Mounting Plate)	500 VDC 100MΩ min at room temperature and humidity *3		
5	Leakage current 250/500V 60Hz	2.5mA/5.0mA max		
6	DC resistance	8.5mΩ max	6mΩ max	4.5mΩ max
7	Safety agency approval temperatures	-25 to +85°C (Refer to Derating Curve)		
8	Operating temperature	-40 to +85°C (Refer to Derating Curve)		
9	Operating humidity	20 to 95%RH (Non condensing)		
10	Storage temperature/humidity	-40 to +85°C/20 to 95%RH (Non condensing)		
11	Vibration	10 to 55Hz, 19.6m/s ² (2G), 3min. Period, 1hour each X, Y and Z axis		
12	Impact	196.1m/s ² (20G), 11ms Once each X, Y and Z axis		
13	Safety agency approvals	UL1283, CSA C22.2 No.8 (C-UL), DIN EN60939 VDE0565 Teil3-1, ENEC		
14	Case size (without projection)	65×84×153 mm (W×H×D) (Option: -G refer to external view) [2.56×3.31×6.02 inches] (W×H×D)		
15	Weight	1.2kg max		


*1 Only "FTA-□-□-335" and "FTA-□-□-335-G", Three Phase Δ-connection: 400 (440 max), Y-connection: 500 (528 max)

*2 Only "FTA-□-□-335" and "FTA-□-□-335-G", 2,800VDC (Cutoff Current = 10mA), 1minute at room temperature and humidity.


*3 Only "FTA-□-□-335" and "FTA-□-□-335-G", insulation resistance specification is deleted.

Circuit Diagram


(1) Line to ground capacitor code : 223, 683, 104

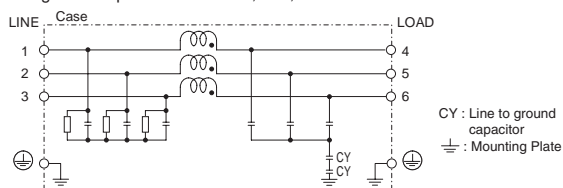


(2) Line to ground capacitor code : 335

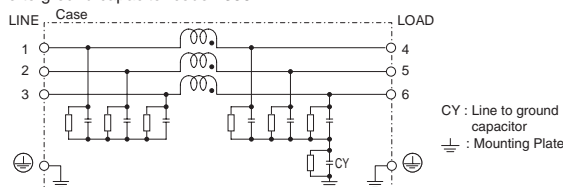

Derating Curve

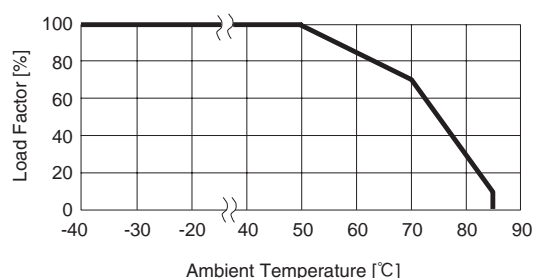


(3) FTA-□-□-335-G

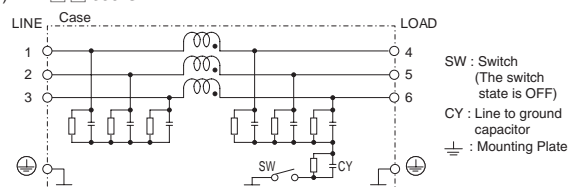

External view

Standard Type

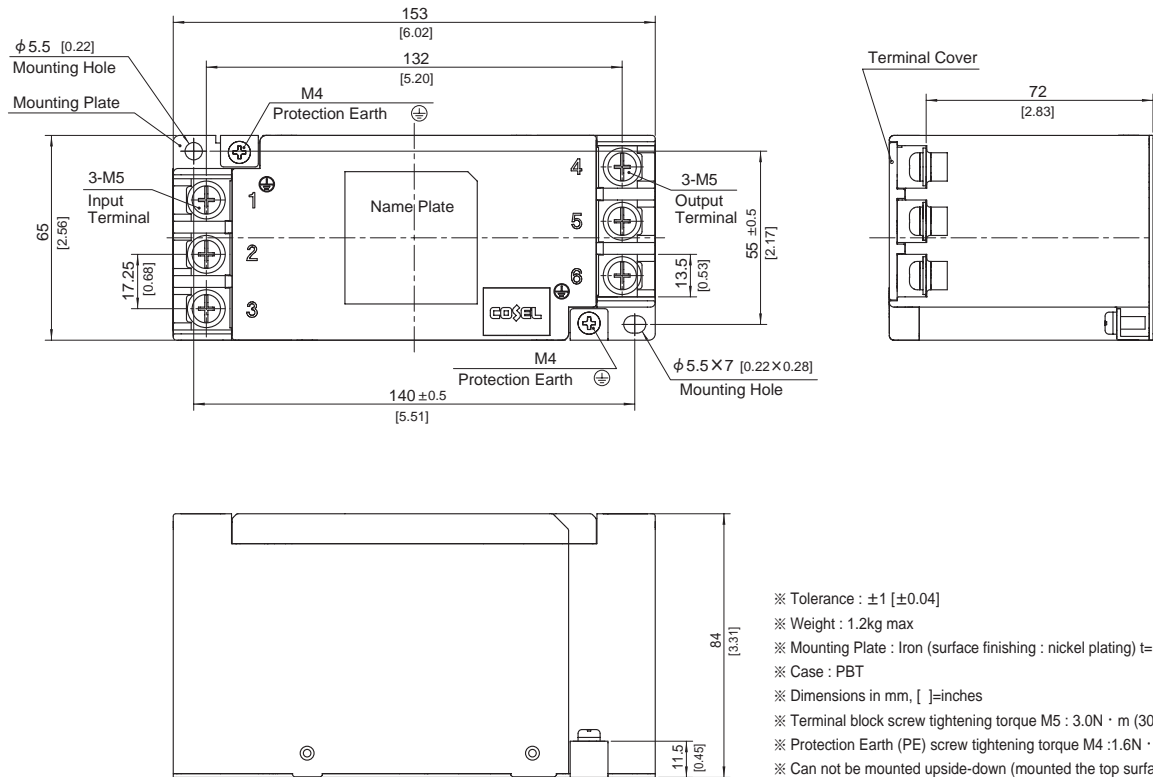

With switch of line to ground capacitor ON/OFF

