

GF10A THRU GF10Y

FEATURES

- * Lead free product , compliance to RoHs
- * GPRC (glass passivated rectifier chip) inside
- * Glass passivated cavity-free junction
- * Ideal for surface mount automotive applications
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

APPLICATION

- * General purpose rectification of power supplies and inverters.
- * Surge absorption.

MECHANICAL DATA

Case : DO-214AC molded plastic

Terminals : Tin Plated, solderable per MIL-STD-750, Method 2026.

Polarity : Color band denotes cathode end

Weight : 0.064 gram

PACKING

7" (178mm ± 2mm) reel :

- * 1,800 pieces per reel
- * 4 reels per box
- * 6 boxes per carton

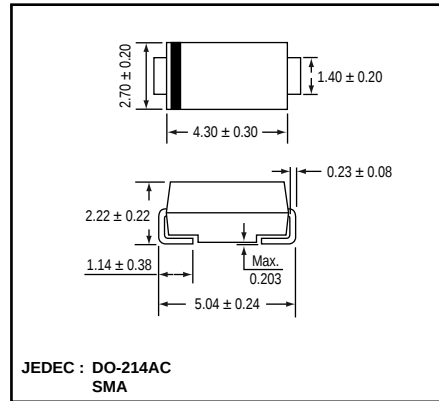
13" (330mm ± 2mm) reel :

- * 7,500 pieces per reel
- * 2 reels per box
- * 5 boxes per carton


OUTLINE DIMENSIONS

Case : DO-214AC

Unit : mm



MARKING

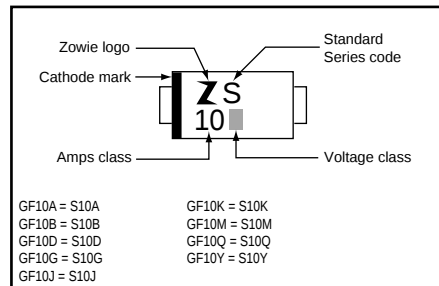






Absolute Maximum Ratings (Ta = 25 °C)

ITEM	Symbol	Rating									Unit
		GF10A	GF10B	GF10D	GF10G	GF10J	GF10K	GF10M	GF10Q	GF10Y	
Repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	1200	1600	V
Average forward current	IF(AV)	1.0									A
Peak forward surge current (8.3ms single half sine-wave)	IFSM	30									
Operating junction and storage temperature Range	Tj , TSTG	-65 to +175									°C

Electrical characteristics (Ta = 25 °C)

ITEM	Symbol	Conditions	Type	Min.	Typ.	Max.	Unit
Forward voltage	VF	IF = 1.0A	GF10A / GF10M	-	0.94	1.00	V
			GF10Q / GF10Y	-	0.98	1.25	
Repetitive peak reverse current	IRRM	VR = Max. VRRM , Ta = 25 °C		-	0.08	5	uA
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz		-	12	-	pF
Thermal resistance	Rth(JA)	Junction to ambient *		-	75	-	°C/W
	Rth(JL)	Junction to lead *		-	27	-	

* Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2 x 0.2" (5.0mm x 5.0mm) copper pad areas.

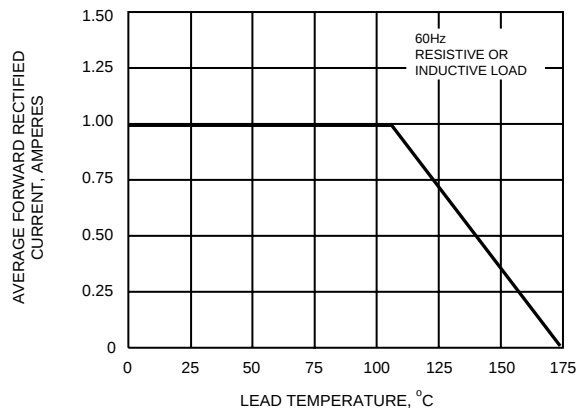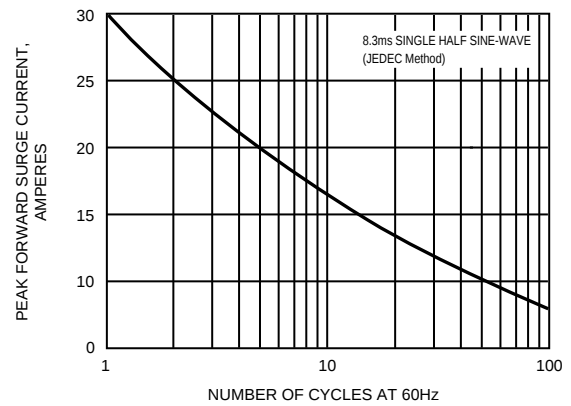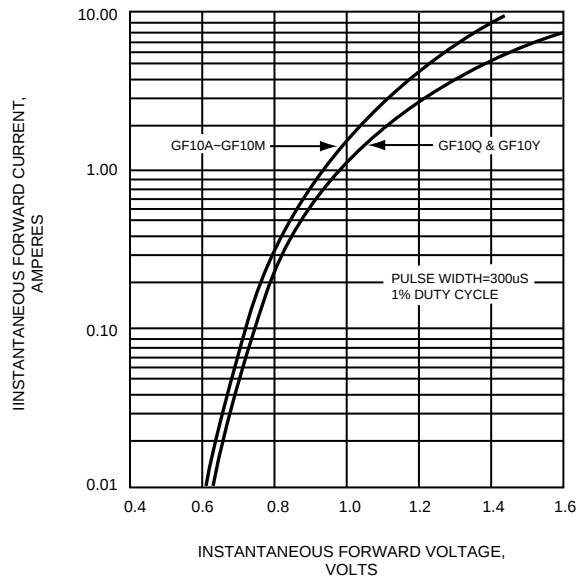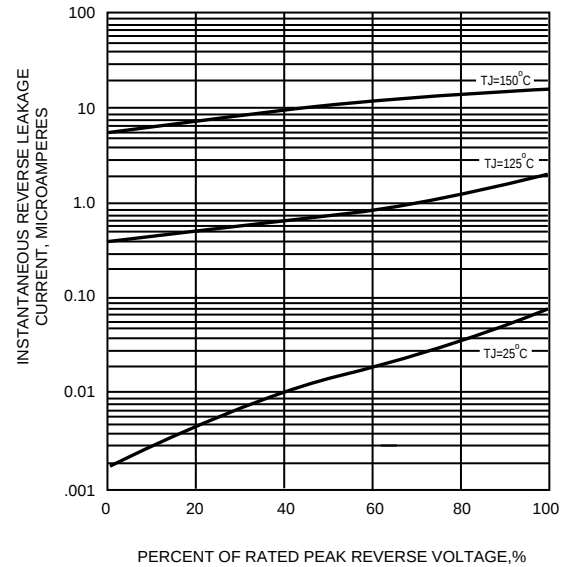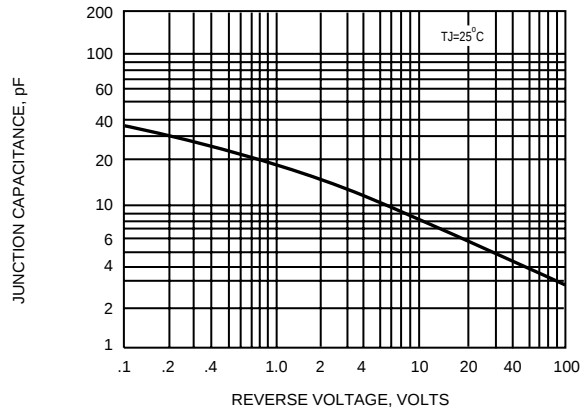FIG.1 - FORWARD CURRENT DERATING CURVE

FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.4 - TYPICAL REVERSE CHARACTERISTICS

FIG.5 - TYPICAL JUNCTION CAPACITANCE

FIG.6 - TYPICAL TRANSIENT THERMAL IMPEDANCE
