

Silicon Schottky Diode, 400A

Features

- Guard Ring Protection
- Low forward voltage drop
- High surge current capability
- Up to 100V V_{RRM}



TWIN TOWER PACKAGE

Maximum Ratings ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	MBR40045CT (R)	MBR40060CT (R)	MBR40080CT (R)	MBR400100C T(R)	Units
Repetitive peak reverse voltage	V_{RRM}		45	60	80	100	V
RMS reverse voltage	V_{RMS}		32	42	56	70	V
DC blocking voltage	V_{DC}		45	60	80	100	V
Average forward current	$I_{F(AV)}$	$T_C \leq 125^\circ\text{C}$	400	400	400	400	A
Non-repetitive forward surge current, half sine-wave	I_{FSM}	$T_C = 25^\circ\text{C}$ $t_p = 8.3 \text{ ms}$	3000	3000	3000	3000	A


Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	MBR40045CT (R)	MBR40060CT (R)	MBR40080CT (R)	MBR400100C T(R)	Units
DC forward voltage	V_F	$I_F = 200 \text{ A}$ $T_J = 25^\circ\text{C}$	0.68	0.68	0.68	0.68	V
DC reverse current	I_R	$V_R = 20 \text{ V}$ $T_J = 25^\circ\text{C}$	5	5	5	5	mA
		$V_R = 20 \text{ V}$ $T_J = 125^\circ\text{C}$	200	200	200	200	

Thermal Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol		MBR40045CT (R)	MBR40060CT (R)	MBR40080CT (R)	MBR400100C T(R)	Units
Thermal resistance junction to case	R_{thJ-C}		0.35	0.35	0.35	0.35	$^\circ\text{C/W}$
Operating, storage temperature range	T_J, T_{stg}		- 40 to +175	- 40 to +175	- 40 to +175	- 40 to +175	$^\circ\text{C}$

Package Outline

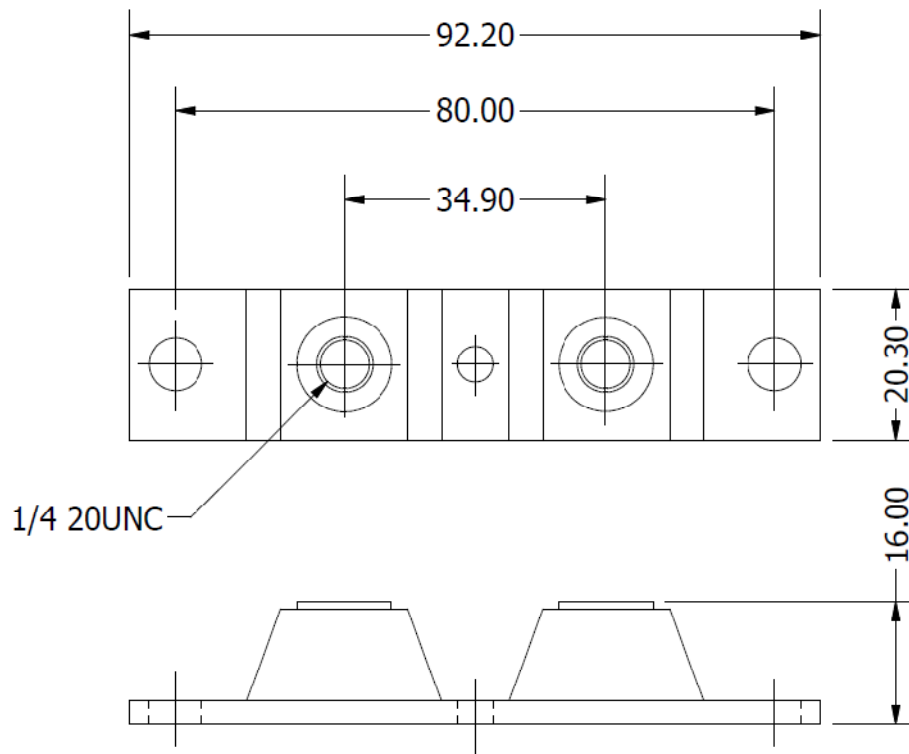

ALL DIMENSIONS IN MM

Ordering Table

<i>MBR</i>	<i>400</i>	<i>45</i>	<i>CT</i>
1	2	3	4

1 – Device Type

> MBR = Schottky Barrier Diode Module

2 – Current Rating = $I_{F(AV)}$

3 – Voltage = V_{RRM}

4 – Polarity

> CT = Normal (Cathode to Base)

> CTR = Reverse (Anode to Base)