


PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
30V	1.75m Ω	148A




Features

- Pb-Free, Halogen Free and RoHS compliant.
- Low $R_{DS(on)}$ to Minimize Conduction Losses.
- Ohmic Region Good $R_{DS(on)}$ Ratio.
- Optimized Gate Charge to Minimize Switching Losses.

Applications

- Protection Circuits Applications.
- Computer for DC to DC Converters Applications.



G. GATE
D. DRAIN
S. SOURCE

100% UIS Tested
100% Rg Tested

ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current ⁴	$T_C = 25\text{ }^{\circ}\text{C}$	I_D	148	A
	$T_C = 100\text{ }^{\circ}\text{C}$		93	
Pulsed Drain Current ¹		I_{DM}	280	
Continuous Drain Current	$T_A = 25\text{ }^{\circ}\text{C}$	I_D	44	
	$T_A = 70\text{ }^{\circ}\text{C}$		35	
Avalanche Current		I_{AS}	49	
Avalanche Energy	$L = 0.1\text{mH}$	E_{AS}	120	mJ
Power Dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	P_D	69	W
	$T_C = 100\text{ }^{\circ}\text{C}$		28	
Power Dissipation ³	$T_A = 25\text{ }^{\circ}\text{C}$	P_D	6.2	W
	$T_A = 70\text{ }^{\circ}\text{C}$		4	
Operating Junction & Storage Temperature Range		T_j, T_{stg}	-55 to 150	$^{\circ}\text{C}$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE		SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Ambient ²	$t \leq 10s$	$R_{\theta JA}$		20	°C / W
Junction-to-Ambient ²	Steady-State	$R_{\theta JA}$		50	
Junction-to-Case	Steady-State	$R_{\theta JC}$		1.8	

¹Pulse width limited by maximum junction temperature.²The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.³The Power dissipation is based on $R_{\theta JA}$ $t \leq 10s$ value.⁴The maximum current rating is package limited.ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	30			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1.3	1.9	2.3	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 100	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 24V, V_{GS} = 0V$			1	μA
		$V_{DS} = 20V, V_{GS} = 0V, T_J = 55\text{ }^{\circ}C$			10	
Drain-Source On-State Resistance ¹	$R_{DS(ON)}$	$V_{GS} = 4.5V, I_D = 13A$		2.2	2.9	m Ω
		$V_{GS} = 10V, I_D = 13A$		1.3	1.75	
Forward Transconductance ¹	g_{fs}	$V_{DS} = 5V, I_D = 13A$		96		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 15V, f = 1MHz$		3262		pF
Output Capacitance	C_{oss}			1239		
Reverse Transfer Capacitance	C_{rss}			66		
Gate Resistance	R_g	$V_{GS} = 0V, V_{DS} = 0V, f = 1MHz$		0.9		Ω
Total Gate Charge ²	Q_g	$V_{DS} = 15V, V_{GS} = 10V, I_D = 13A$	$V_{GS} = 10V$	60		nC
			$V_{GS} = 4.5V$	30		
Gate-Source Charge ²	Q_{gs}			8.5		
Gate-Drain Charge ²	Q_{gd}			12		
Turn-On Delay Time ²	$t_{d(on)}$	$V_{DS} = 15V, I_D \cong 13A, V_{GS} = 10V, R_{GEN} = 6\Omega$		22		nS
Rise Time ²	t_r			65		
Turn-Off Delay Time ²	$t_{d(off)}$			79		
Fall Time ²	t_f			87		

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_J = 25 °C)


Continuous Current ³	I _S			58	A
Forward Voltage ¹	V _{SD}	I _F = 13A, V _{GS} = 0V		1.2	V
Reverse Recovery Time	t _{rr}	I _F = 13A, dI _F /dt = 100A / μS	48		nS
Reverse Recovery Charge	Q _{rr}		56		nC

¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.


²Independent of operating temperature.

³The maximum current rating is package limited.


Output Characteristics

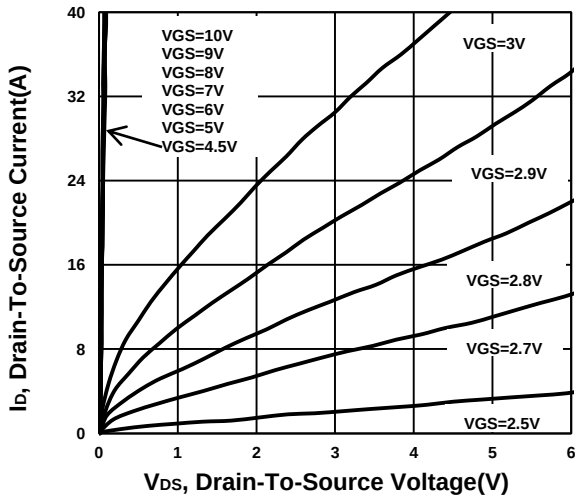


Transfer Characteristics

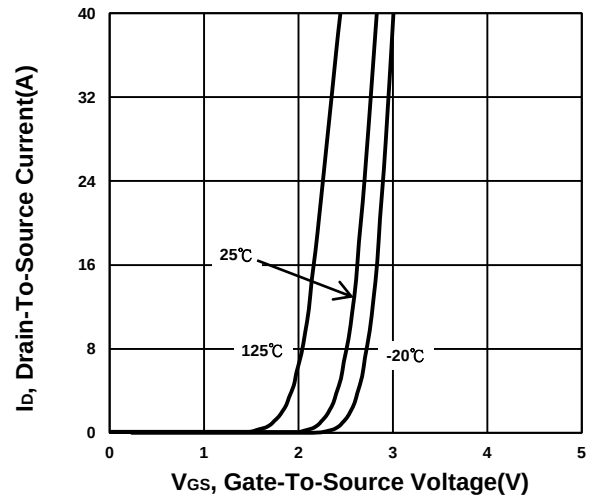


On-Resistance VS Gate-To-Source Voltage

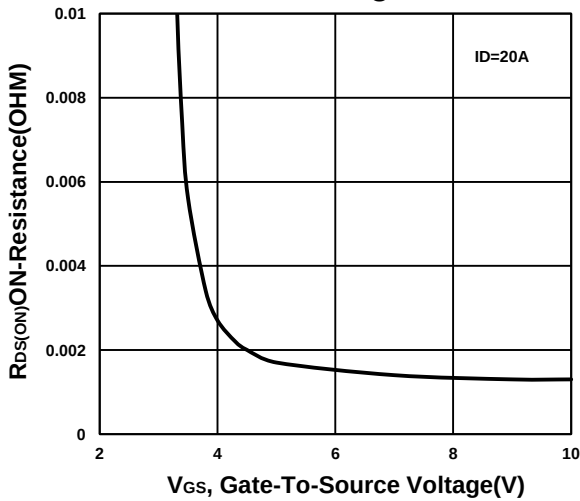


On-Resistance VS Drain Current

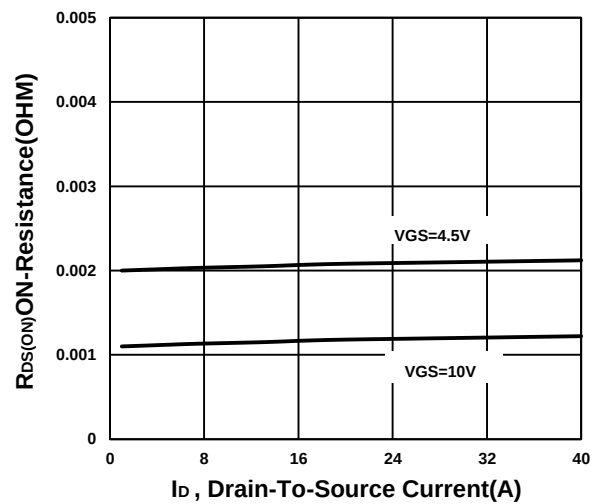


On-Resistance VS Temperature

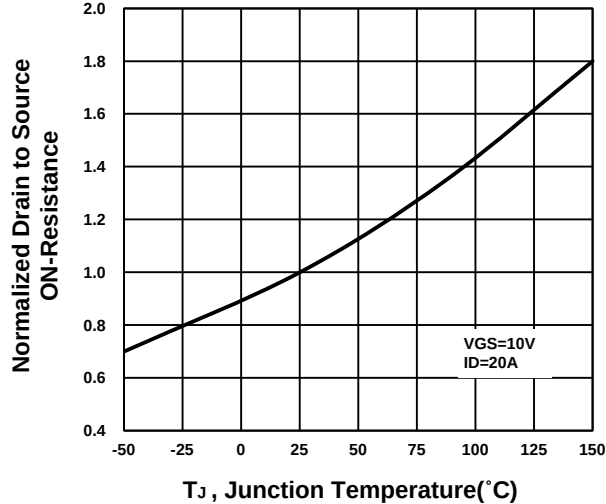


Capacitance Characteristic

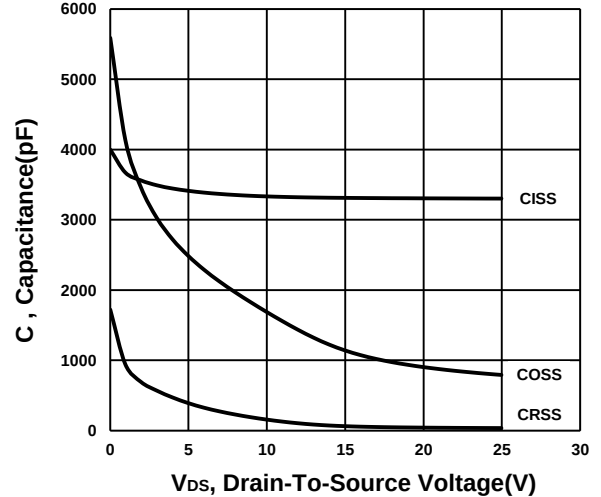


Gate charge Characteristics

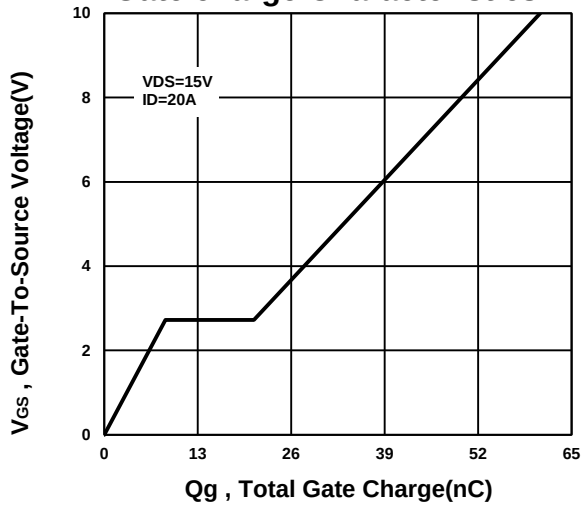


Source-Drain Diode Forward Voltage

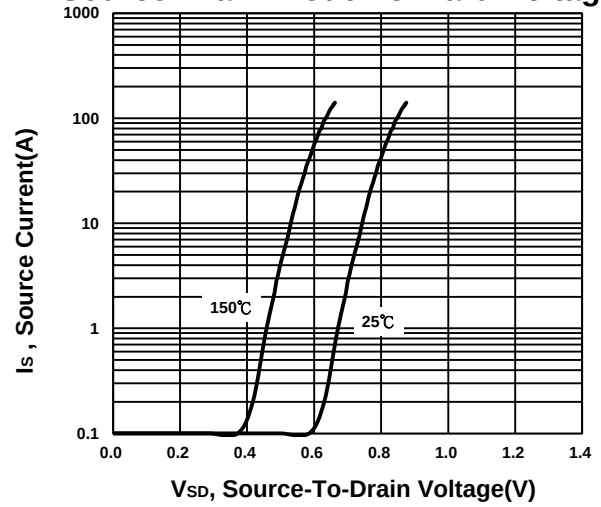


Safe Operating Area

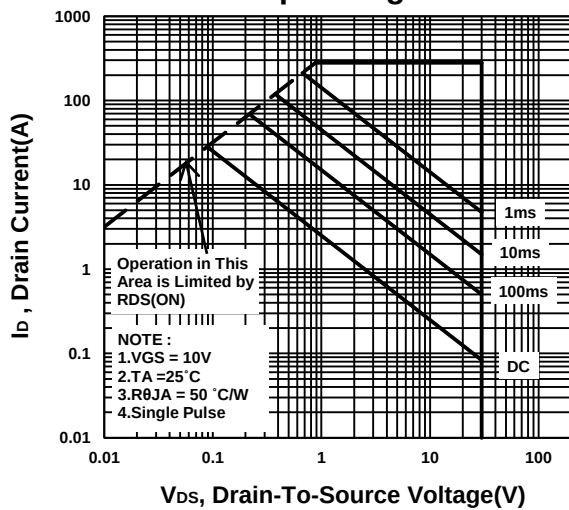


Single Pulse Maximum Power Dissipation

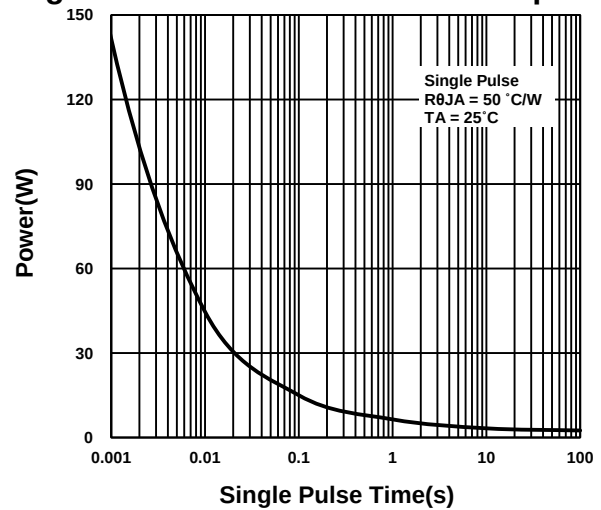


Transient Thermal Response Curve

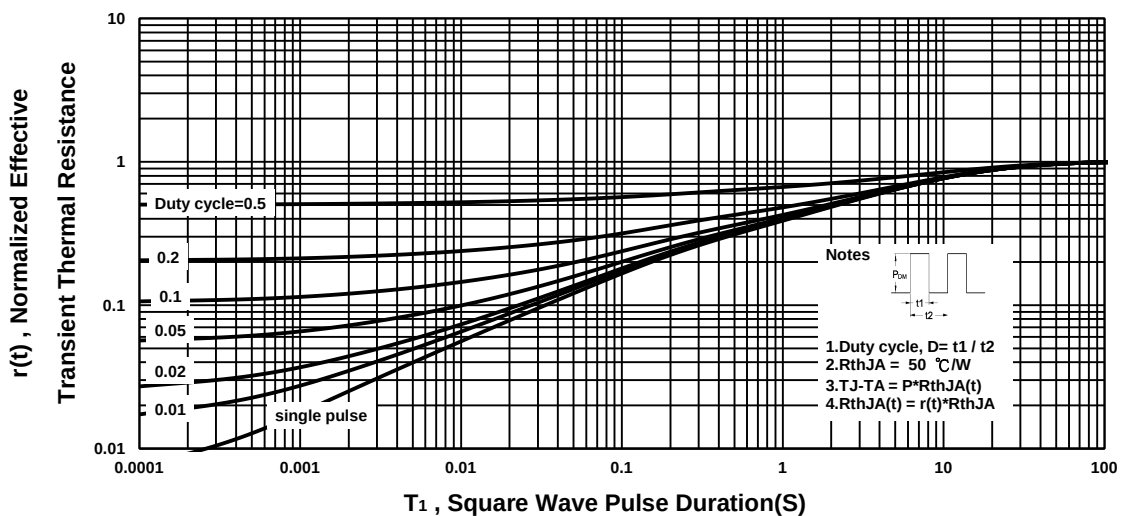

Safe Operating Area

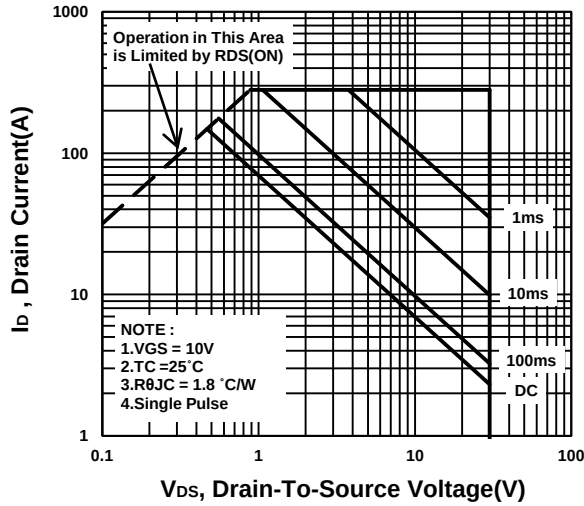

Single Pulse Maximum Power Dissipation

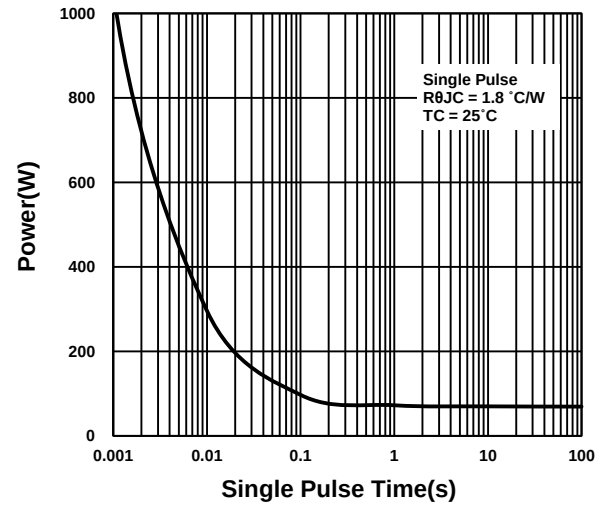

Transient Thermal Response Curve

