

SHINDENGEN

Schottky Rectifiers (SBD)

Dual

S10SC4M

40V 10A

FEATURES

T_j150

P_{RRSM} avalanche guaranteed

APPLICATION


Switching power supply

DC/DC converter

Home Appliances, Office Equipment

Telecommunication

OUTLINE DIMENSIONS

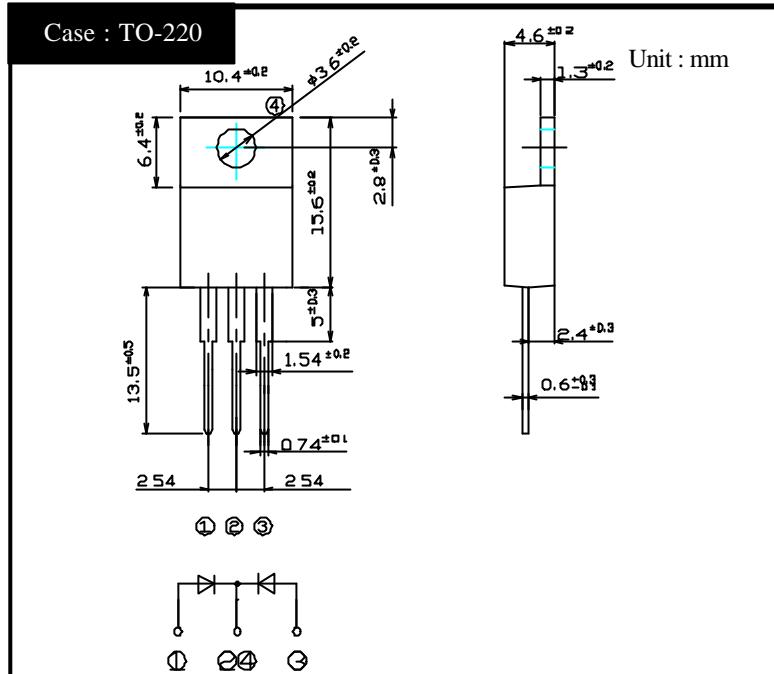

RATINGS

Absolute Maximum Ratings (If not specified T_c=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40 ~ 150	
Operating Junction Temperature	T _j		150	
Maximum Reverse Voltage	V _{RM}		40	V
Repetitive Peak Surge Reverse Voltage	V _{RRSM}	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	I _o	50Hz sine wave, R-load, Rating for each diode I _o /2, T _c =125	10	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =125	100	A
Repetitive Peak Surge Reverse Power	P _{RRSM}	Pulse width 10 μs, Rating of per diode, T _j =25	330	W
Mounting Torque	T _{OR}	(Recommended torque 0.3N·m)	0.5	N·m

Electrical Characteristics (If not specified T_c=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =5A, Pulse measurement, Rating of per diode	Max.0.55	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.3.5	mA
Junction Capacitance	C _j	f=1MHz, V _R =10V, Rating of per diode	Typ.180	pF
Thermal Resistance	j _C	junction to case	Max.3.0	/W


S10SC4M

Forward Voltage

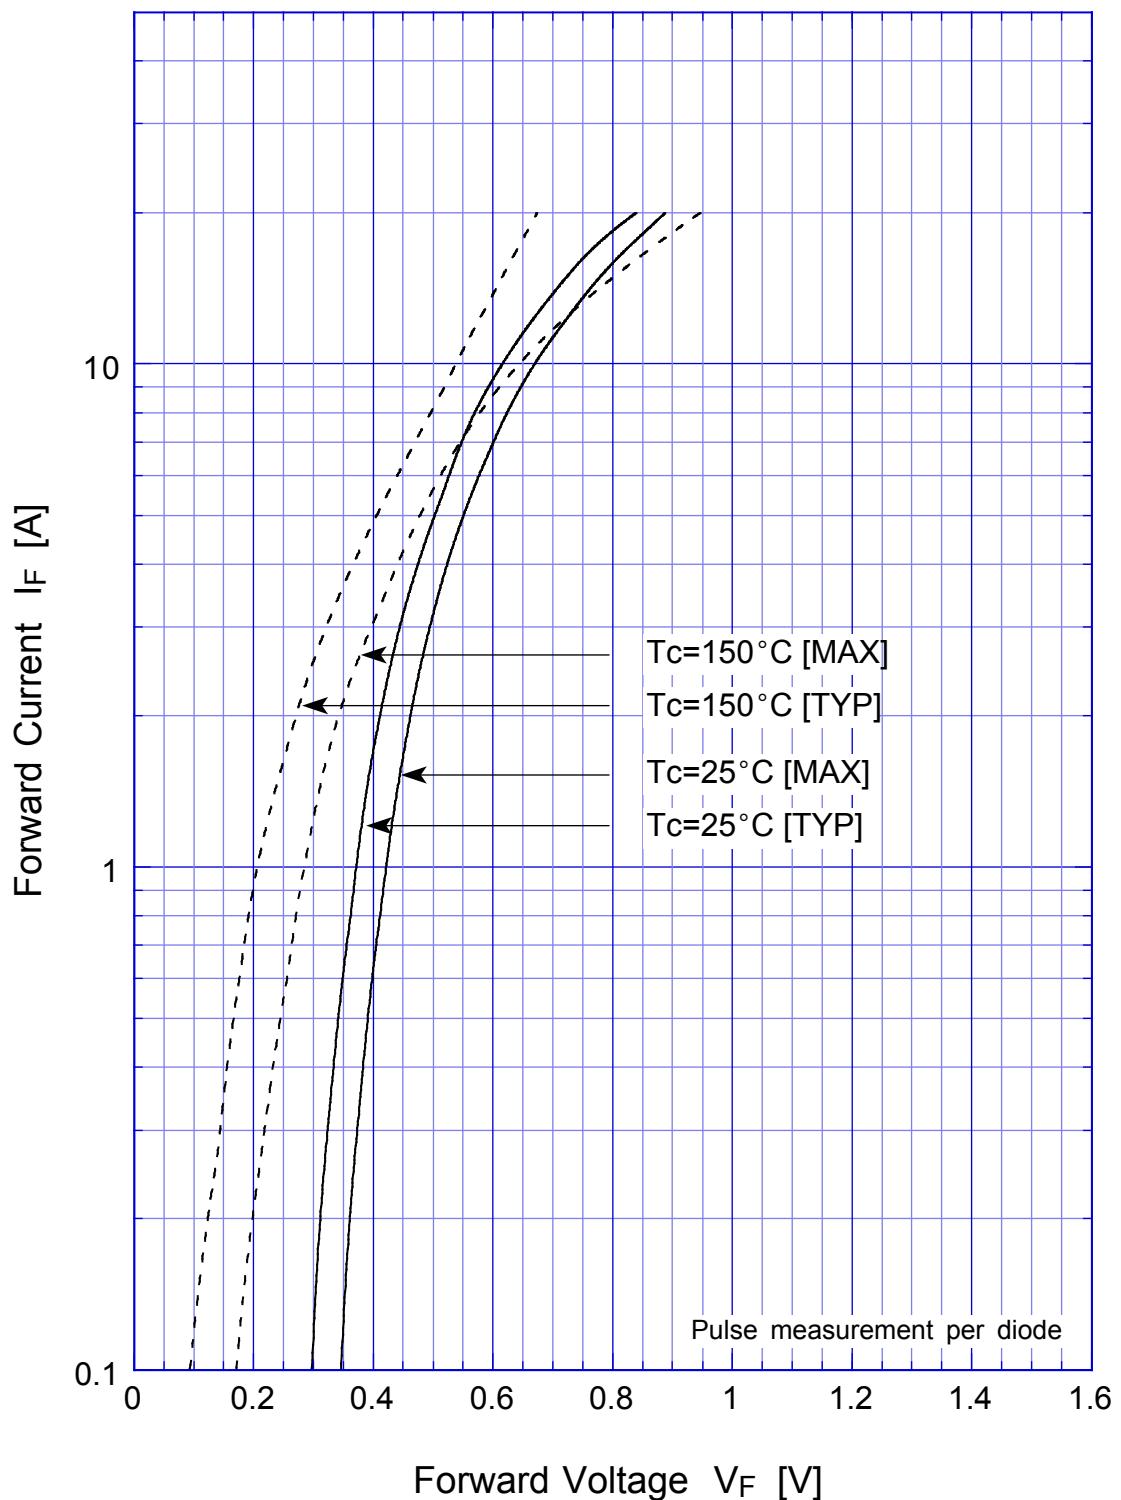


S10SC4M

Junction Capacitance

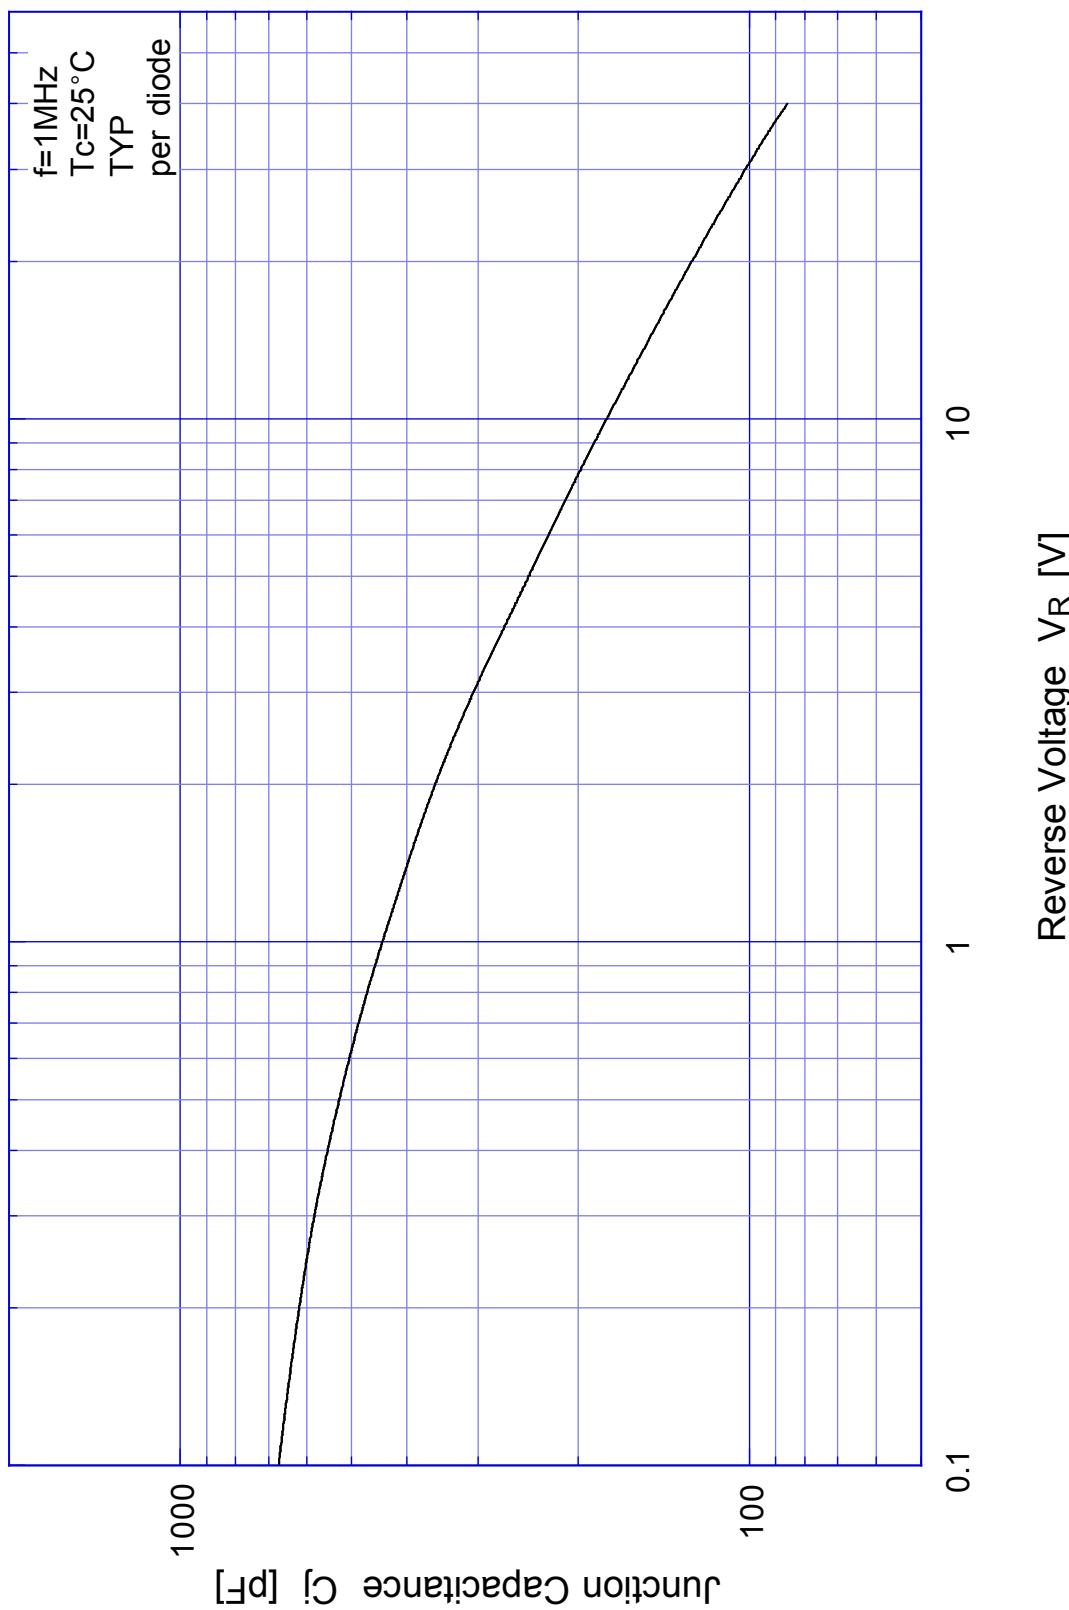


S10SC4M

Reverse Current

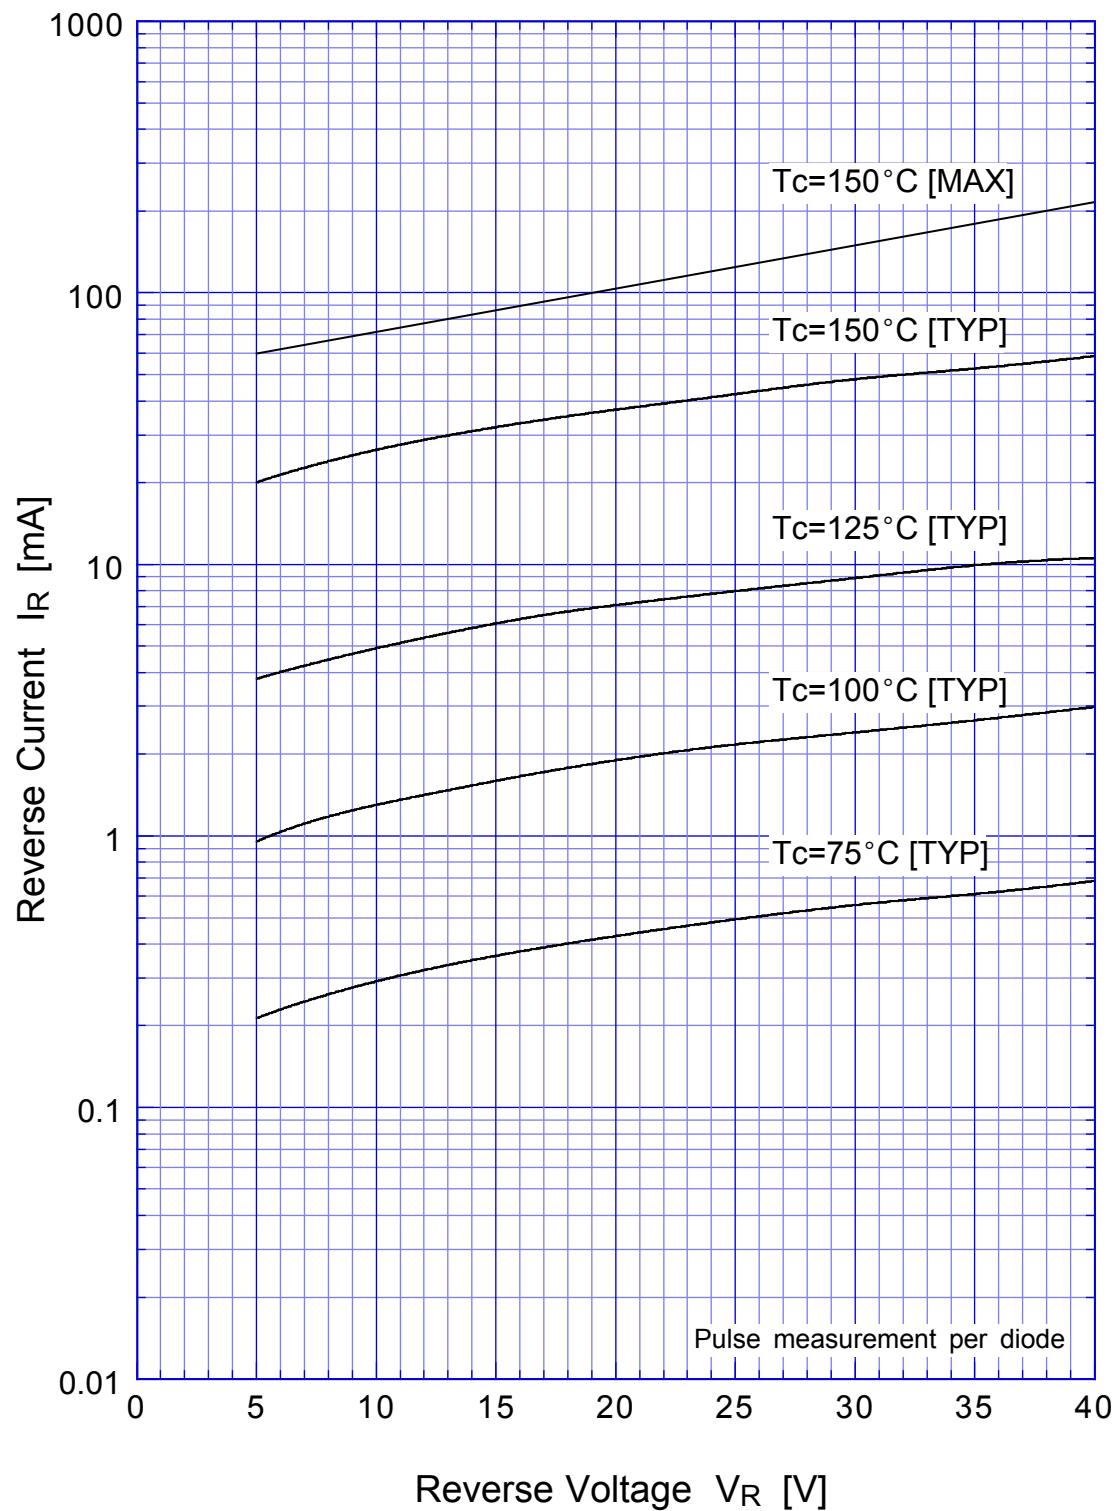


S10SC4M



Reverse Power Dissipation


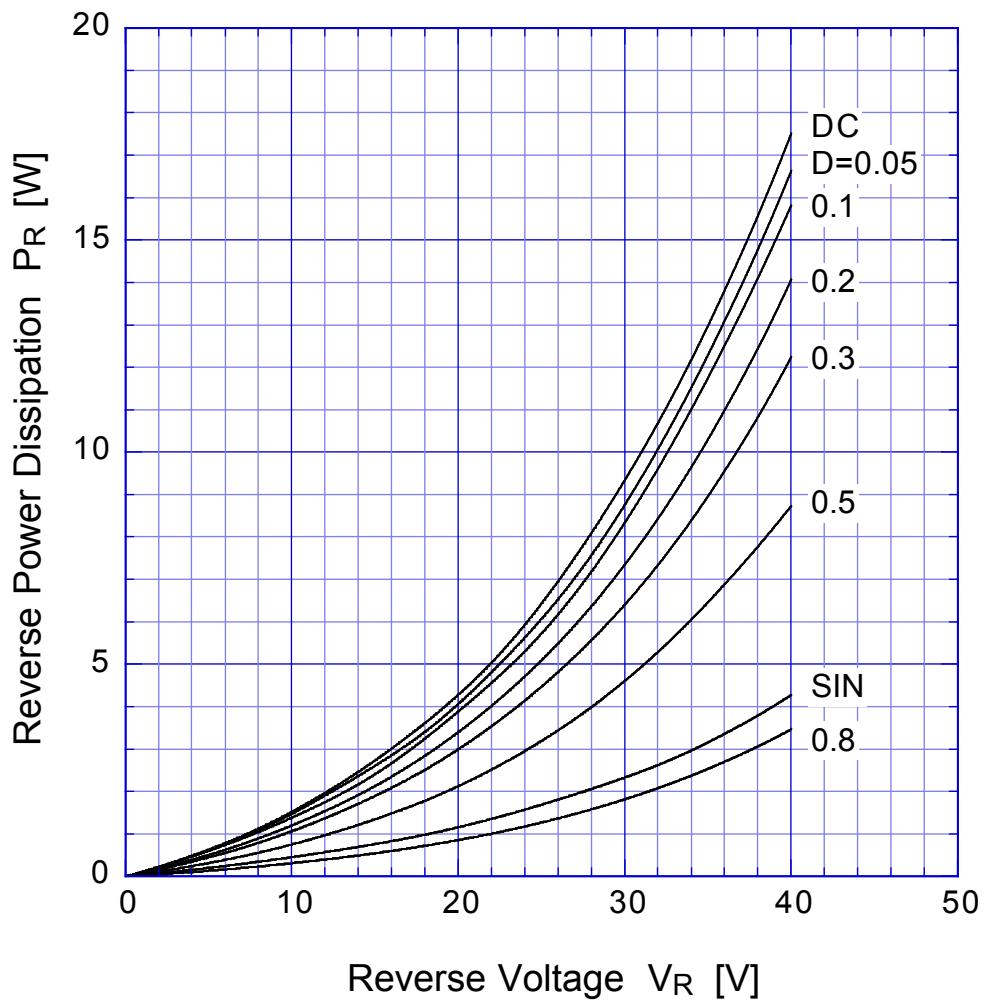


$T_j = 150^\circ\text{C}$

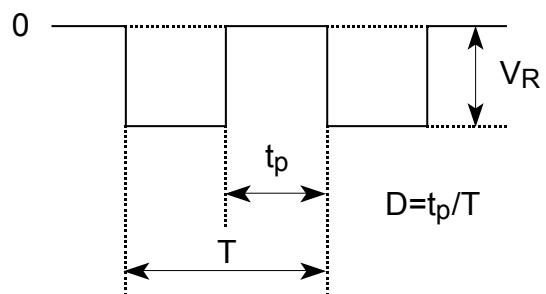


S10SC4M Forward Power Dissipation

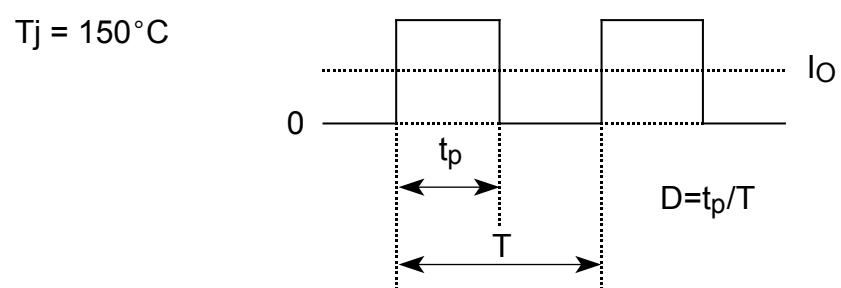
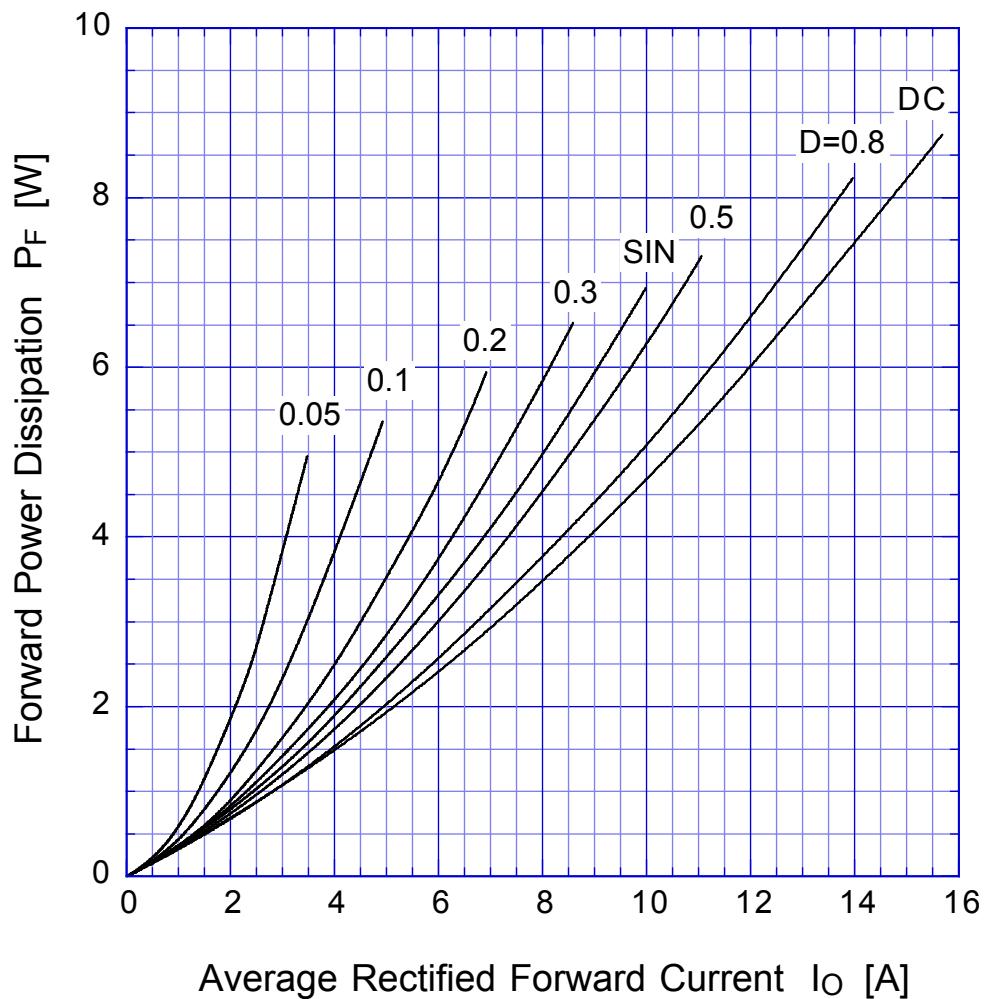


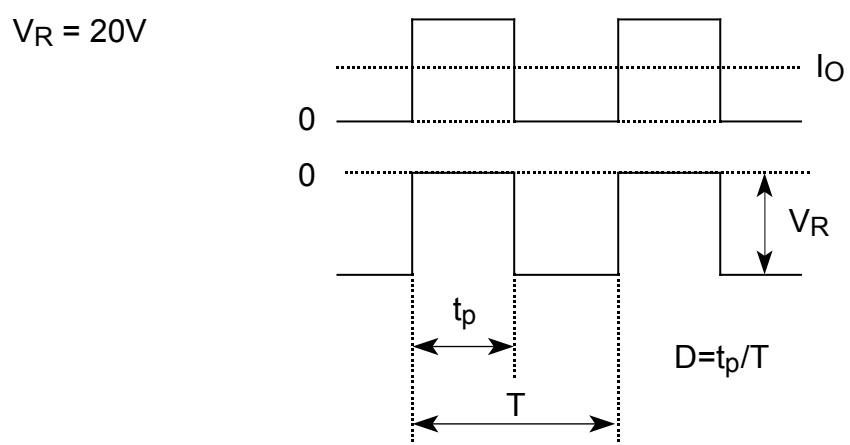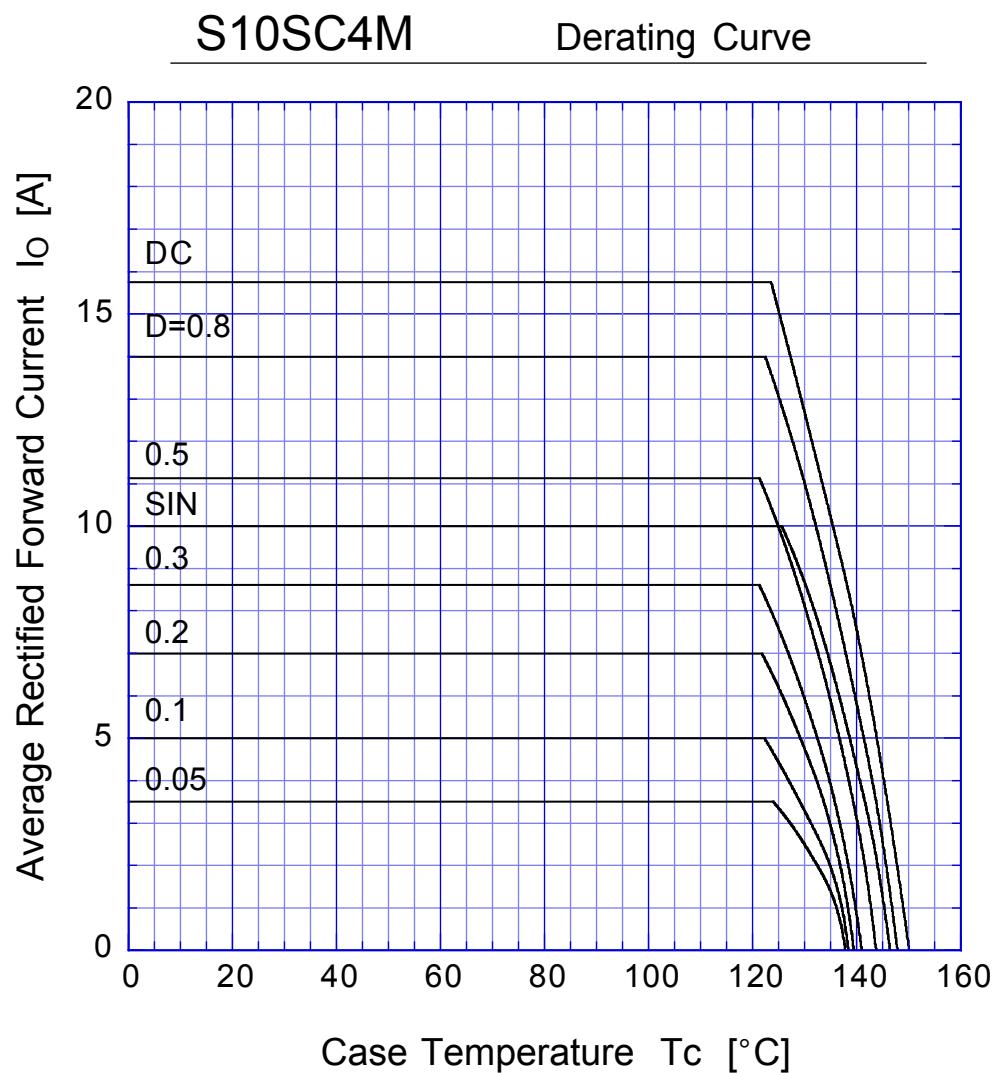

S10SC4M Peak Surge Forward Capability

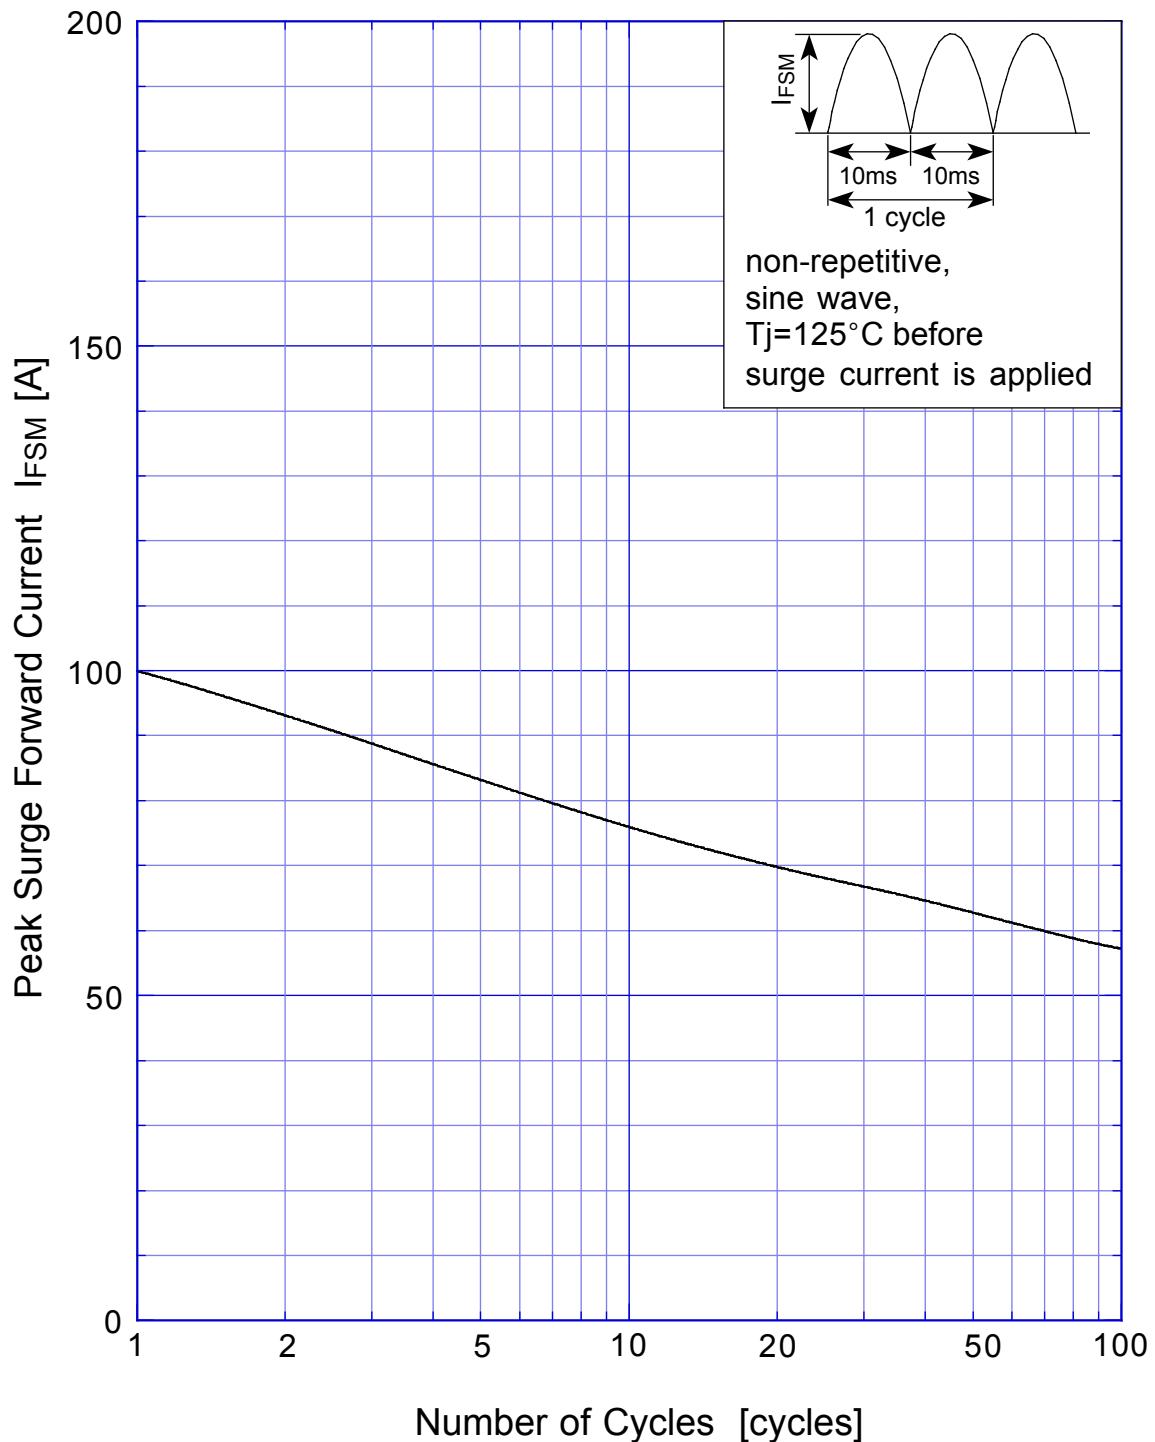

SBD Repetitive Surge Reverse Power Derating Curve

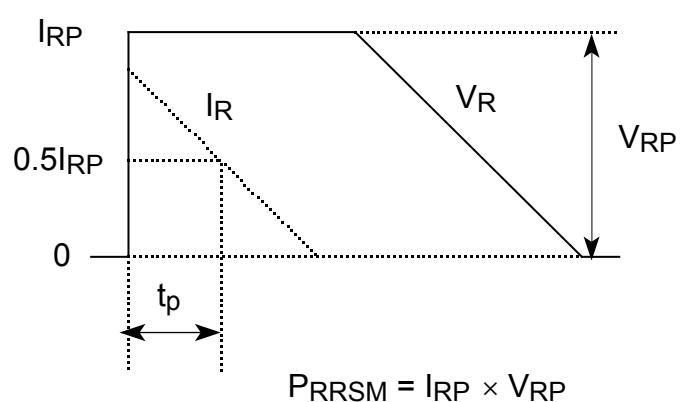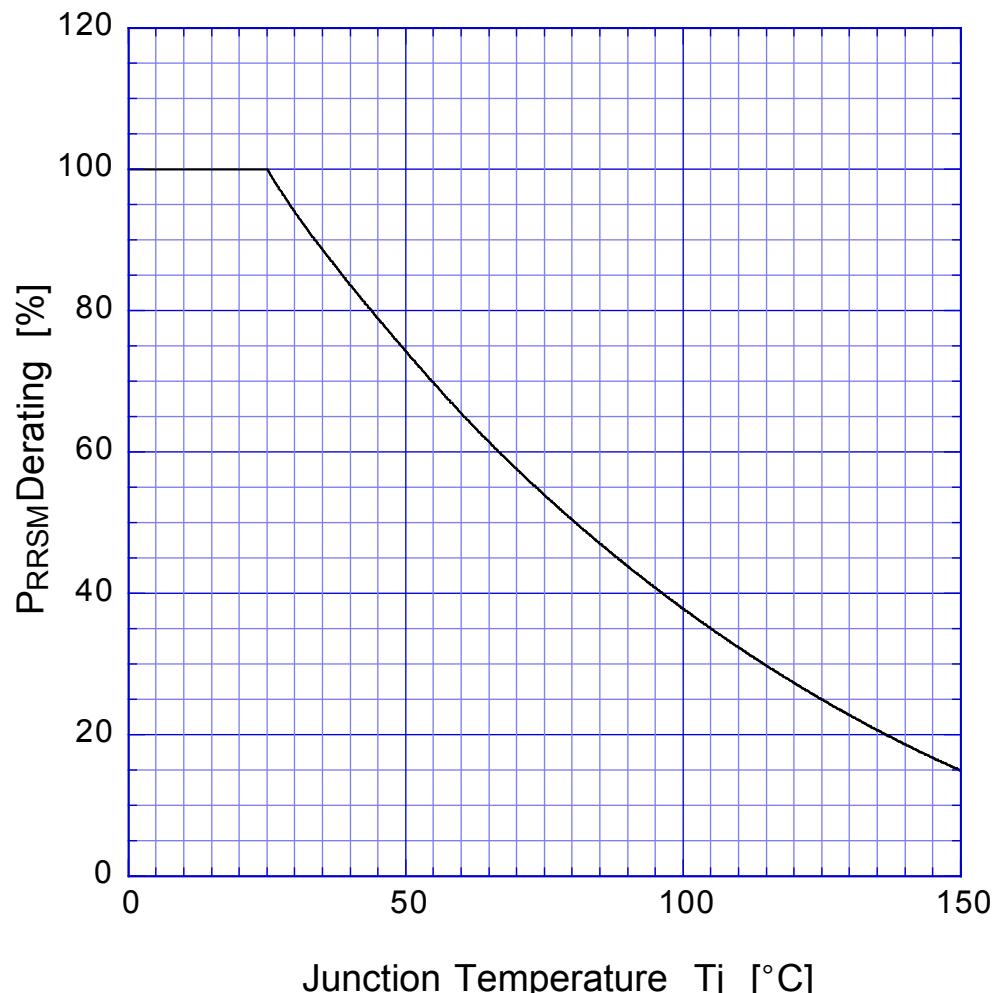

SBD Repetitive Surge Reverse Power Capability

