


Datasheet of SAW Device

SAW Dual Filter

for Band34/39 / Unbalanced / LH /1511

Murata PN: SAWFD1G90KC0F0A

■ Feature > 1in2out Dual



Note : Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only. Please also read caution at the end of this document.



SAWFD1G90KC0F0A (Band34/39 / Unbalanced / LH / 1511)

Revision No.	Date	Discription
SAWFD1G90KC0F0A_rev. A	Mar-15-2013	■ Initial Release

- Operating temperature	:-30 to +85 deg.C
- Storage temperature	:-40 to +85 deg.C

- Storage temperature

- Input Power

- D.C. Volatage between the terminals

- Minimum Resistance betweem the terminals

- RoHS compliance

: 3V (25+/-2 deg.C) : 10M ohm

:+13 dBm 2000 h


: Yes

mnKata Innovator in Electronics

SAWFD1G90KC0F0A (Band34/39 / Unbalanced / LH / 1511)

Package Dimensions & Recommended Land Pattern

unit: mm

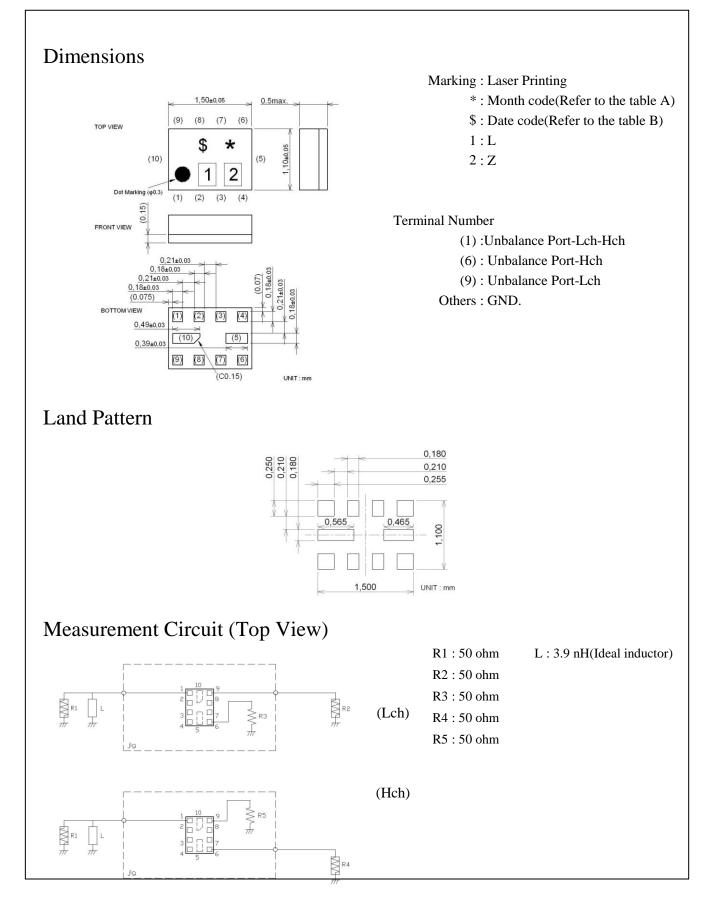



SAWFD1G90KC0F0A (Band34/39 / Unbalanced / LH / 1511)

Electrical Characteristic < Low Freq. Filter >

Ţ	v Freq. Filt				Cha	to +85 d	stics	TT '4	
Lov			min. typ.		max.	Unit	Note		
Center Frequency						1900		MHz	
Insertion Loss	1880.	to	1920.	MHz		1.5	2.2	dB	
	1880.	to	1920.	MHz		1.5	2.0	dB	+23 to +27deg.C
Ripple Deviation	1880.	to	1920.	MHz		0.3	1.2	dB	
	1880.	to	1920.	MHz		0.3	1.0	dB	+23 to +27deg.C
VSWR	1880.	to	1920.	MHz		1.3	1.8		
	1880.	to	1920.	MHz		1.3	1.7		+23 to +27deg.C
Absolute Attenuation	1.	to	1570.	MHz	30	37		dB	
	1570.	to	1610.	MHz	35	38		dB	
	1610.	to	1830.	MHz	30	39		dB	
	1830.	to	1850.	MHz	25	41		dB	
	2000.	to	2400.	MHz	30	37		dB	
	2400.	to	2500.	MHz	35	42		dB	
	2500.	to	4000.	MHz	30	41		dB	
	4000.	to	6000.	MHz	20	34		dB	
					l	l	l		

* Typical value at 25±2deg.C



SAWFD1G90KC0F0A(Band34/39 / Unbalanced / LH / 1511)Electrical Characteristic< High Freq. Filter >


						to +85 d			N
Hıg	High Freq. Filter							Unit	Note
Center Frequency					min.	typ. 2017.5	max.	MHz	
Insertion Loss	2010.	to	2025.	MHz		1.9	2.3	dB	
Insertion Loss	2010.	to	2025.	MHz		1.9	2.1	dB	+23 to +27deg.C
Ripple Deviation	2010.	to	2025.	MHz		0.3	0.8	dB	125 to 12/deg.e
Reppie Deviation	2010.	to	2025.	MHz		0.3	0.6	dB	+23 to +27deg.C
VSWR	2010.	to	2025.	MHz		1.3	1.8		
	2010.	to	2025.	MHz		1.3	1.6		+23 to +27deg.C
Absolute Attenuation	1.	to	1570.	MHz	35	38		dB	
	1570.	to	1610.	MHz	35	38		dB	
	1610.	to	1930.	MHz	35	38		dB	
	1930.	to	1980.	MHz	10	22		dB	
	1930.	to	1980.	MHz	15	22		dB	+23 to +27deg.C
	2050.	to	2075.	MHz	3.5	16.0		dB	
	2050.	to	2075.	MHz	10	16		dB	+23 to +27deg.C
	2075.	to	2400.	MHz	27	33		dB	
	2400.	to	2500.	MHz	35	41		dB	
	2500.	to	3500.	MHz	35	42		dB	
	3500.	to	6000.	MHz	35	46		dB	


* Typical value at 25±2deg.C



SAWFD1G90KC0F0A (Band34/39 / Unbalanced / LH / 1511)

Electrical Characteristic < Low Freq. Filter >

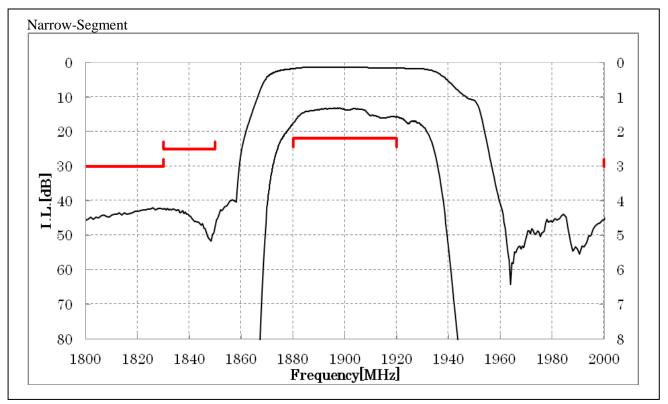


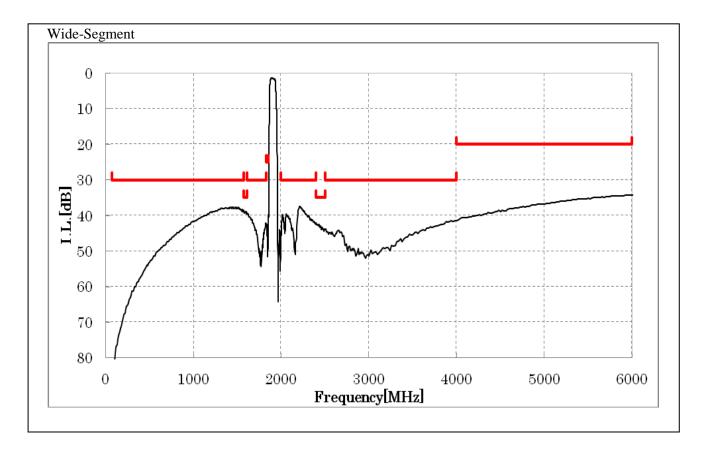




SAWFD1G90KC0F0A (Band34/39 / Unbalanced / LH / 1511)

Electrical Characteristic < High Freq. Filter >

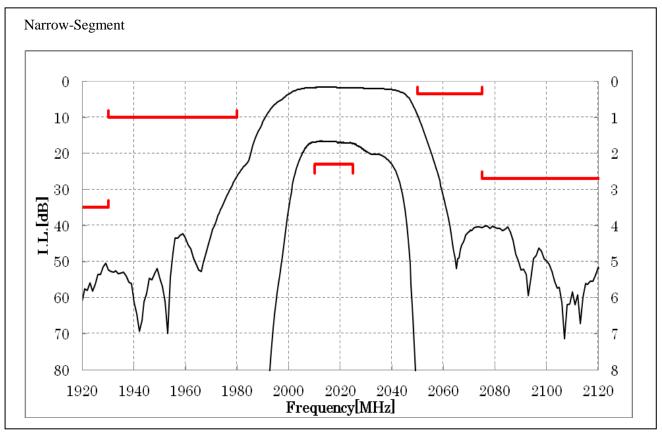

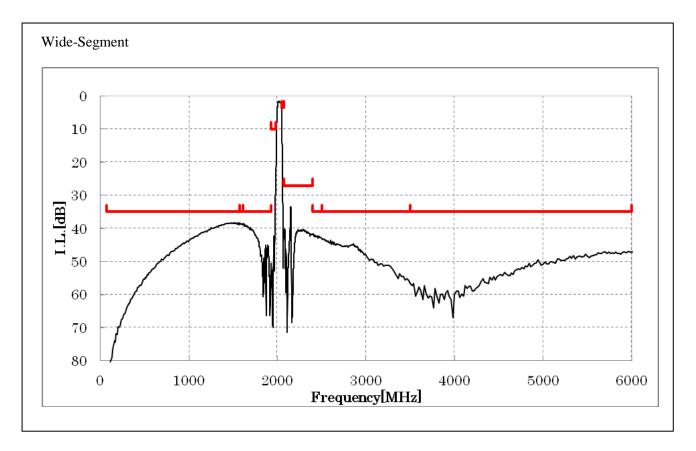





$SAWFD1G90KC0F0A \quad (Band 34/39 / Unbalanced / LH / 1511)$

Dimensions of Tape & Reel unit: mm


Carrier Tape

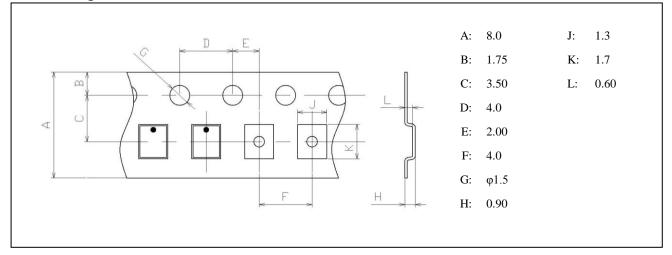

Tape

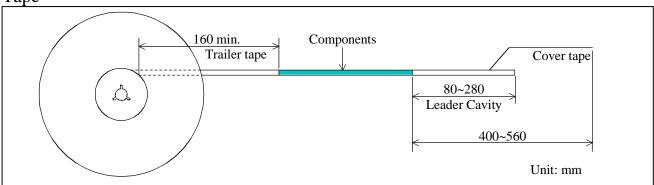

Reel

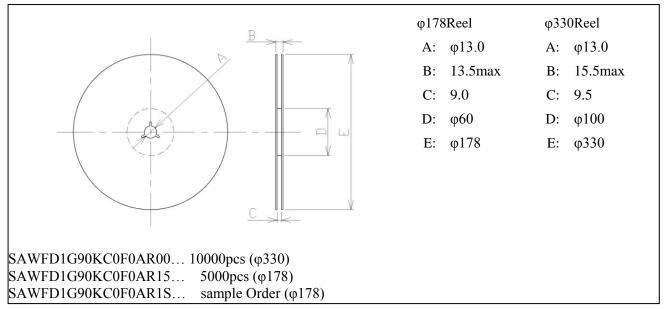



SAWFD1G90KC0F0A (Band34/39 / Unbalanced / LH / 1511)

Marking Code

Table	A٠	Month	Code
I auto	11.	wionui	Couc

1 4	able A. Wohlin Code												
Г	2009	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	2013 2017	Α	В	С	D	Е	F	G	н	J	К	L	М
F	2010	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	2014 2018	N	Ρ	Q	R	S	Т	U	V	W	Х	Y	Z
	2011	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	2015 2019	а	b	ы	d	e	f	g	h	j	k	l	m
Γ	2012	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	2016 2020	n	p	G	r	4	t	u	V	ω	x	y	3

Table B: Date Code

1st	date	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	
А	code	В	С	D	E	F	G	Н	J	K	
11th	date	12th	13th	14th	15th	16th	17th	18th	19th	20th	
L	code	М	Ν	Р	Q	R	S	Т	U	V	
21st	date	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
W	code	Х	Y	Ζ	а	b	C	d	е	f	g

Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product.

All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.



$SAWFD1G90KC0F0A \quad (Band 34/39 / Unbalanced / LH / 1511)$

Important Notice (2/2)

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment

- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use. Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

• the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,

•deviation or lapse in function of engineering sample,

•improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.