

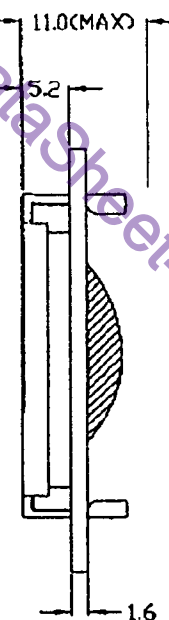


液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

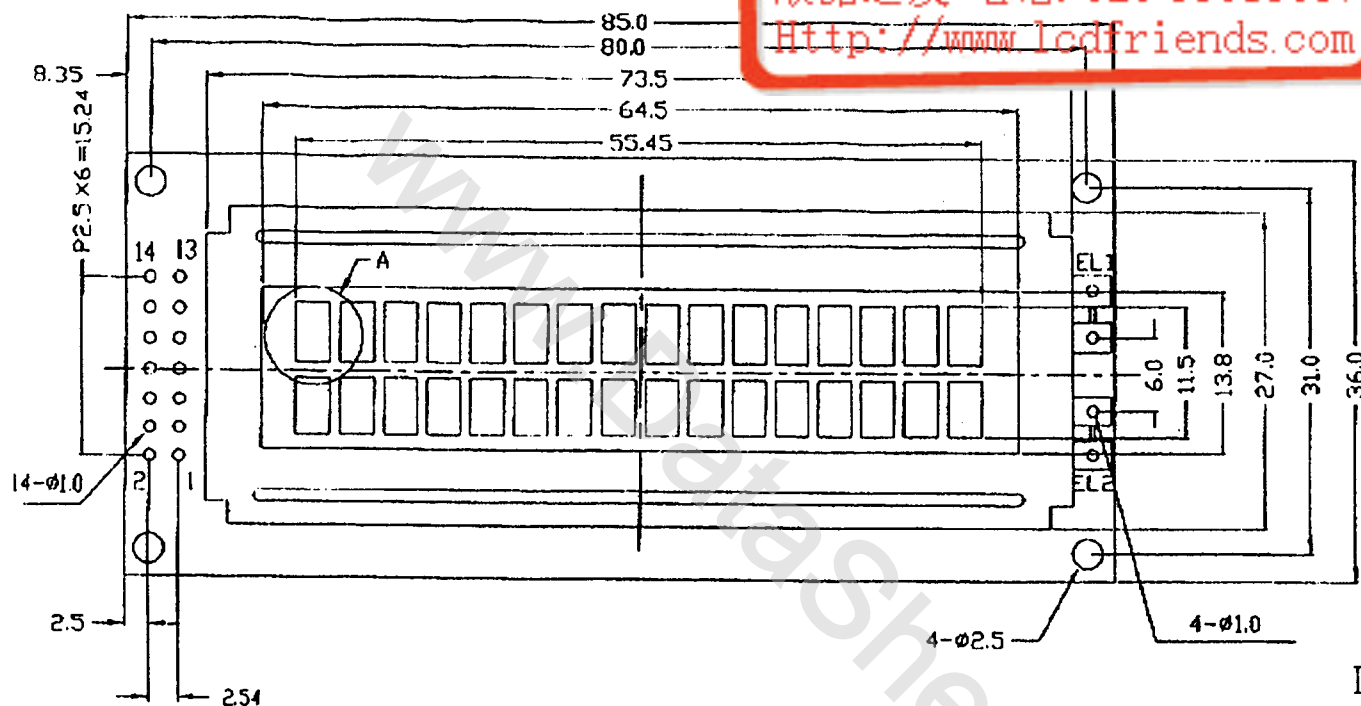

DETAIL A:



1	2	3	4	5	6	7	8	9	10	11	12	13	14
VSS	VDD	VD	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

NOTES:

1. DISPLAY TYPE: STN/GREY MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 4.7V
6. OPERATING TEMP: 0°C~+50°C
7. STORAGE TEMP: -20°C~60°C
8. CONTROLLER: S6A0069X01-C0CX
9. EL BACKLIGHT
10. BEZEL IS TO BE PAINTED BLACK
11. UNMARKED TOLERANCE: ±0.3



TIAN-MA MICROELECTRONICS CO.

22/F., HANGDI Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 赵建祥	TITLE: TM162JDB6-1	SCALE
CHECKED BY: 潘永强	DWG NO: G-1	UNIT: mm
APPROVED BY: 张永强	DWG NAME: TM162JDB6-KG-SHEET NO: 0P	
CONFIRMED BY: 张永强		