


液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

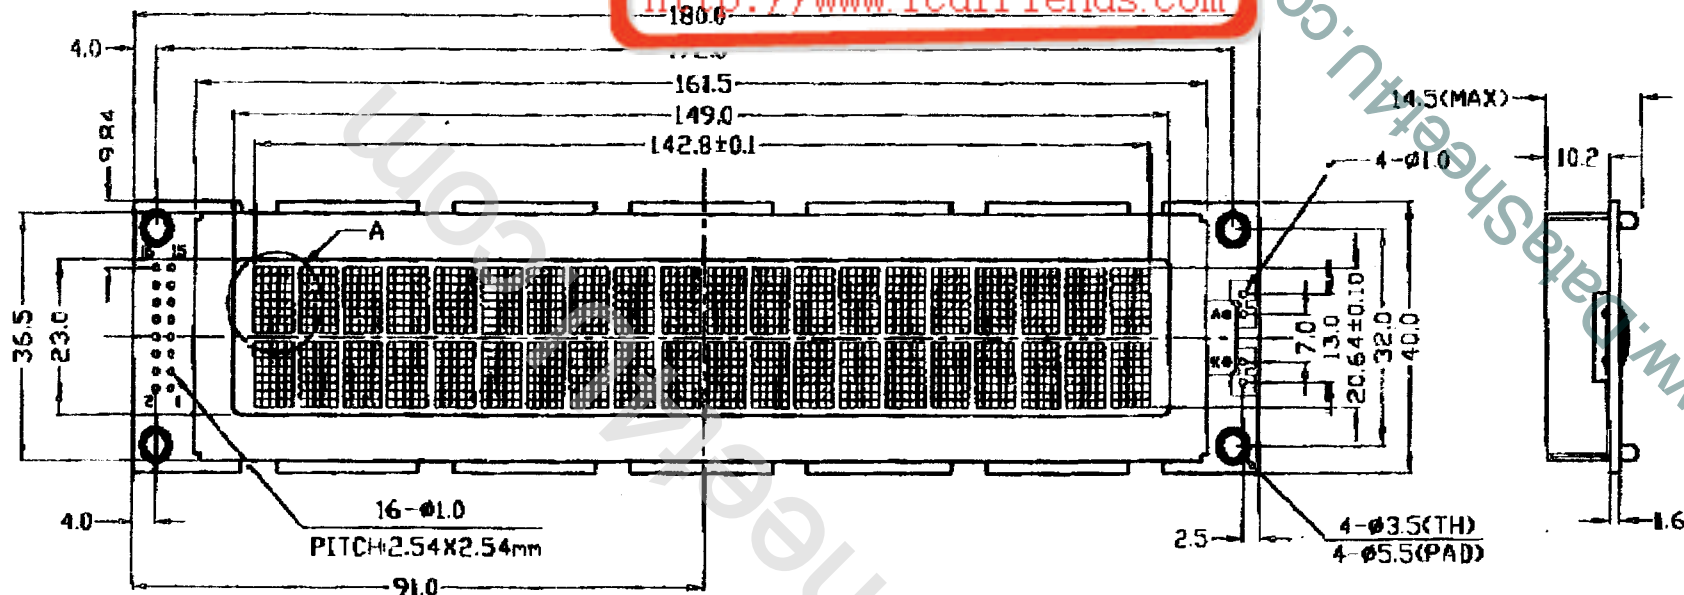


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	Vdd	Vo	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES

- 1.DISPLAY TYPE: STN/YELLOW-GREEN MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANFLECTIVE/POSITIVE
- 4.OPERATING TEMP: 0°C--+50°C
- 5.STORAGE TEMP: -20°C--+60°C
- 6.LCD OPERATING VOLTAGE: 4.8V
- 7.DRIVE METHOD: DUTY 1/16 BIAS 1/5
- 8.CONTROLLER: SPLC780A1-01C-C
- 9.ALL UNMARKED TOLERANCES: ±0.3mm
- 10.BACKLIGHT: LED
- 11.BEZEL IS TO BE PAINTED BLACK

DETAIL A:

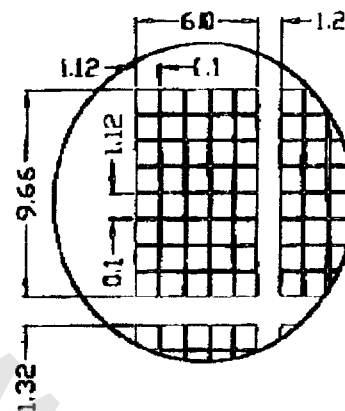

TIAN-MA MICROELECTRONICS CO.

22/F., HANGUO Building, Shenzhen Road, Central, Shenzhen, China

DRAWN BY: <i>[Signature]</i>	TITLE: TM202MBC6	SCALE:
CHECKED BY: <i>[Signature]</i>	DWG NO: G-3	UNIT: mm
APPROVED BY: <i>[Signature]</i>	DWG NAME: TM202MBC-3	SHIPS NO: 07
CONFIRMED BY: <i>[Signature]</i>		