


液晶之友 电话: 020-33819057

Http://www.lcdfriends.com

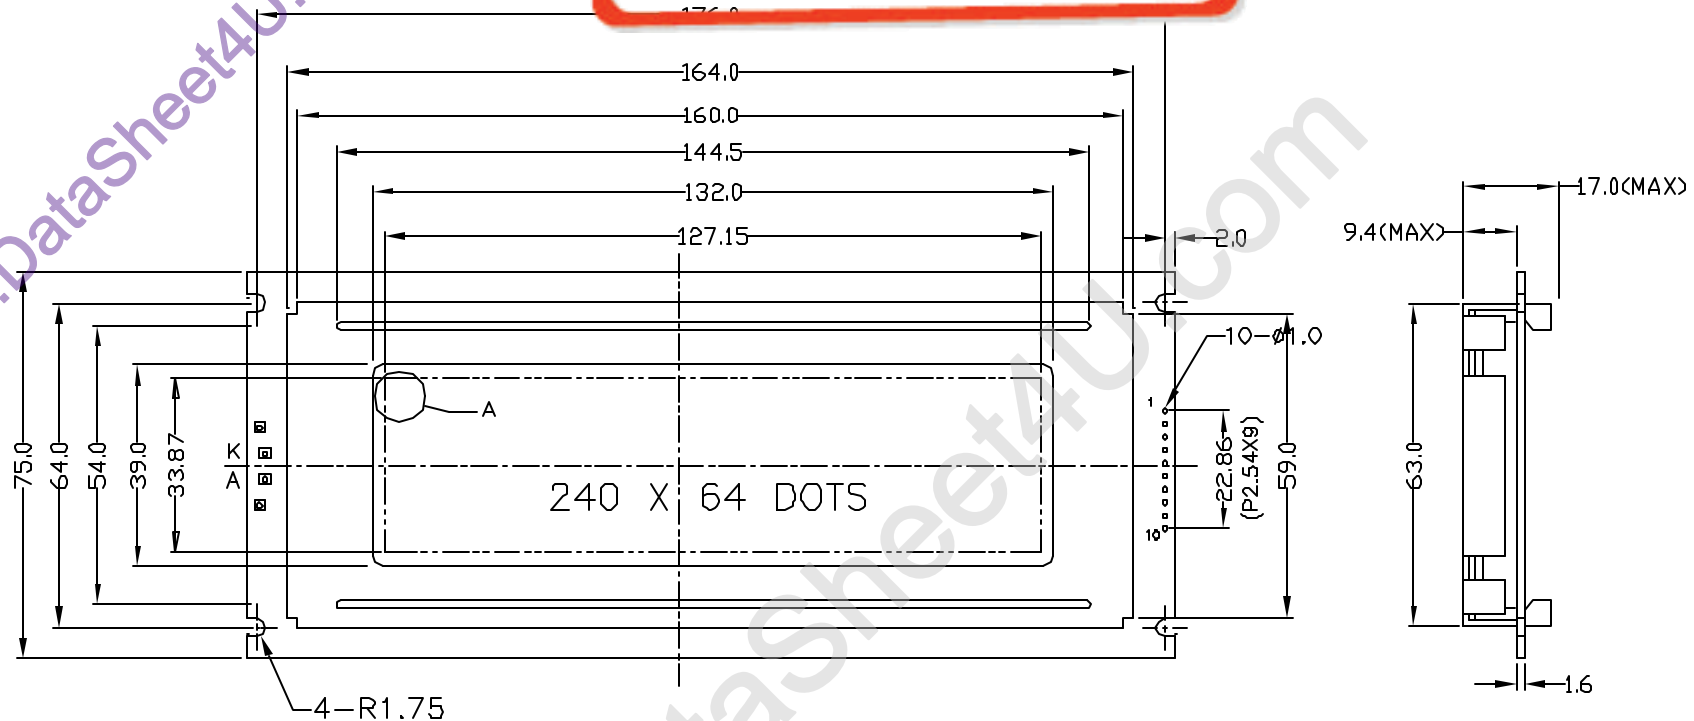


#### NOTES:

- 1.DISPLAY TYPE STN/GREY MODE
- 2.VIEWING DIRECTION: 6'00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP.: 0°C--+50°C
- 5.STORAGE TEMP.: -20°C--+60°C
- 6.DRIVE VOLTAGE(VDD): 5.0V
- 7.CONTROLLER: S6B2086X01-T0RA
- 8.LCD OPERATING VOLTAGE:12.0V
- 9.LCD DRIVE METHOD: DUTY=1/64 BIAS=1/9
- 10.ALL UNMARKED TOLERANCES:±0.2
- 11.BACKLIGHT TYPE: LED<4.2V DC,YELLOW-GREEN>
- 12.BEZEL IS TO BE PAINTED BLACK
- 13.BUILT-IN TEMPERATURE COMPENSATION CIRCUIT
- 14.CURRENT LIMIT RESISTOR FOR LED: 2.2ohm, 1W

|    |     |
|----|-----|
| 1  | D1  |
| 2  | FLM |
| 3  | M   |
| 4  | CL1 |
| 5  | CL2 |
| 6  | NC  |
| 7  | VDD |
| 8  | VSS |
| 9  | VEE |
| 10 | NC  |

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

|               |                         |          |
|---------------|-------------------------|----------|
| DRAWN BY:     | TITLE: TM24064NDC       | SCALE    |
| CHECKED BY:   | DWG NO: G-1             |          |
| APPROVED BY:  | DWG NAME: TM24064NDCG-1 | UNIT: mm |
| CONFIRMED BY: | SHEET NO: 01            |          |