


液晶之友 电话: 020-33819057  
Http://www.lcdfriends.com

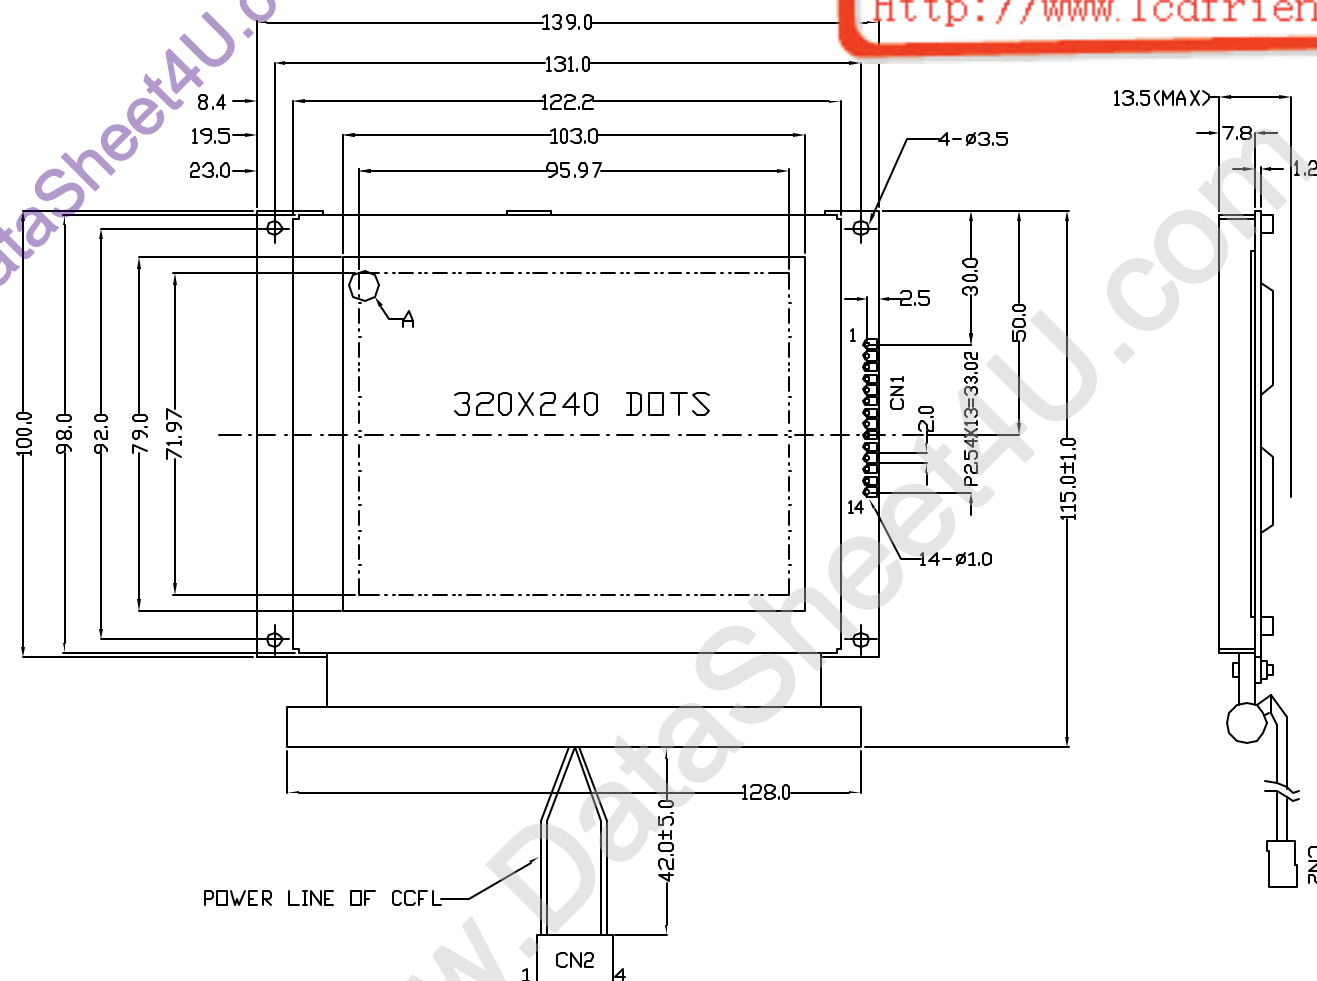

CN1

|    |      |
|----|------|
| 1  | FLM  |
| 2  | LP   |
| 3  | CP   |
| 4  | M    |
| 5  | VADJ |
| 6  | VCC  |
| 7  | VSS  |
| 8  | VEE  |
| 9  | D0   |
| 10 | D1   |
| 11 | D2   |
| 12 | D3   |
| 13 | Doff |
| 14 | NC   |


CN2

|   |        |
|---|--------|
| 1 | FL     |
| 2 | NC     |
| 3 | NC     |
| 4 | FL GND |

NOTES:

1. DISPLAY TYPE: FSTN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. OPERATING TEMP.: 0°C-50°C
5. STORAGE TEMP.: -20°C-60°C
6. LCD OPERATING VOLTAGE: 25.4V
7. DRIVE METHOD: 1/240 DUTY 1/16 BIAS
8. DRIVER: S6B0086X01-QORJ(KS0086)
9. BACKLIGHT: CCFL
10. ALL UNMARKED TOLERANCES: ±0.3mm
11. BEZEL IS TO BE PAINTED WITH ZINC(WHITE)
12. BACKLIGHT CONNECTOR(CN2): IL-G-4S-S3C2 JAE

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

22/F., HANGOU Building, Shennan Road, Central, Shenzhen, China

|               |                           |          |
|---------------|---------------------------|----------|
| DRAWN BY:     | TITLE: TM320240BCD        |          |
| CHECKED BY:   |                           |          |
| APPROVED BY:  |                           |          |
| CONFIRMED BY: |                           |          |
|               | DWG NO: G-2               | SCALE:   |
|               | DWG NAME: TM320240BCD-G-2 | UNIT: mm |
|               | SHEET NO: 07              |          |