



## VC670M-TO46GL

- Red VCSEL
- 670 nm, 1 mW
- Multi Mode
- TO-46 Can
- Glass Lens, 2° Viewing Angle



### Description

**VC670M-TO46GL** is a multi mode red VCSEL emitting at typically 670 nm with rated output power of 1.0 mW cw, mounted into a standard TO-46 package and sealed with a flat window cap. The VCSEL works under low forward current and voltage.

### Maximum Ratings

Parameter	Symbol	Values		Unit
		Min.	Max.	
Forward Current	$I_F$		8	mA
Reverse Voltage (@ 10 $\mu$ A)	$V_F$		5	V
Operating Temperature	$T_{CASE}$	- 20	+ 50	°C
Storage Temperature	$T_{STG}$	- 40	+ 85	°C
Lead Solder Temperature *	$T_{SLD}$		+ 260	°C

\* must be completed within 10 seconds

### Laser Characteristics $(T_{CASE}=25^{\circ}\text{C})$



Parameter	Symbol	Min.	Values		Unit
			Typ.	Max.	
Emission Wavelength	$\lambda_{Peak}$	660	670	690	nm
Spectral Width	$\Delta\lambda$			0.85	nm
Optical Output Power	$P_O$		1.0		mW
Threshold Current	$I_{TH}$		2.0	3.5	mA
Operating Current	$I_F$		5		mA
Operating Voltage	$V_F$		2.1	2.5	V
Beam Divergence (Full Width)	$\Theta$		2		deg
Slope Efficiency	$\eta$	0.2	0.3		mW/mA
Dynamic Resistance	$R_D$		60	90	$\Omega$

### Thermal Characteristics

Parameter	Symbol	Min.	Values Typ.	Max.	Test Conditions	Unit
Max. Operating Temperature Optical Output Power	$P_{T=50^{\circ}\text{C}}$		0.5		$T_C=50^{\circ}\text{C}$ , 5mA	mW
$I_{TH}$ Temperature Variation	$\Delta I_{TH}$		1.5		$T_C=-20$ to $50^{\circ}\text{C}$	mA
$\eta$ Temperature Variation	$\Delta\eta / \Delta T$		-0.8		$T_C=-20$ to $50^{\circ}\text{C}$ , 5mA	%/°C
$\lambda$ Temperature Variation	$\Delta\lambda / \Delta T$		0.05		$T_C=-20$ to $50^{\circ}\text{C}$ , 5mA	nm/°C




## Typical Performance Curves

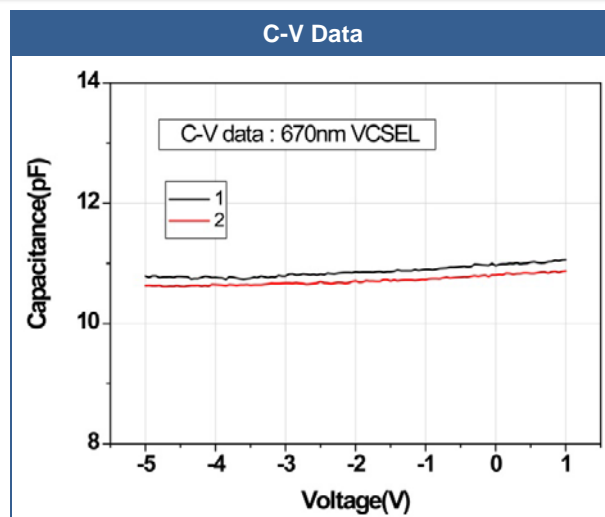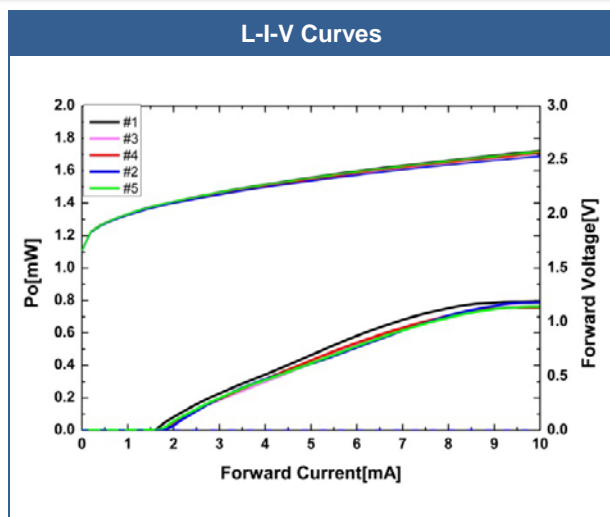

## Outline Dimensions

TO46GL

TO-46 with glass lens

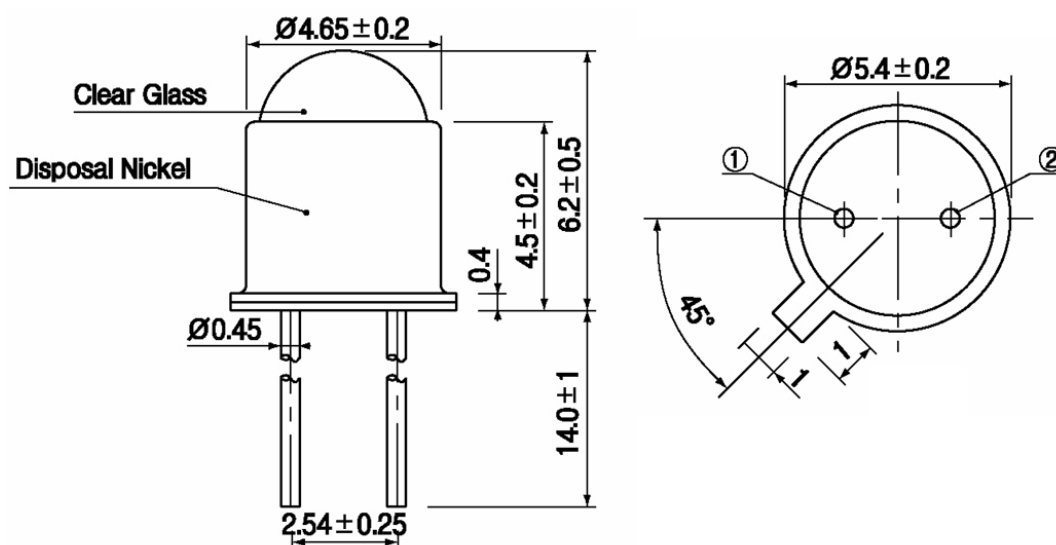

All Dimensions in mm

## Electrical Connection

Lead	Description
PIN 1	VCSEL Anode
PIN 2	VCSEL Cathode





## Precautions

---

### Static Electricity:

VCSELs are **sensitive to electrostatic discharge (ESD)**. Precautions against ESD must be taken when handling or operating these VCSELs. Surge voltage or electrostatic discharge can result in complete failure of the device.



### Safety Advice:

This VCSEL emits concentrated red light which can be **hazardous to the human eye and skin**. This diode is classified as CLASS 2 laser product according to **IEC 60825-1** and **21 CFR Part 1040.10** Safety Standards.

### Operation:

**Do only operate VCSELs with a current source.**

Running these LEDs from a voltage source will result in complete failure of the device.

Current of a LED is an exponential function of the voltage across it. Usage of current regulated drive circuits is mandatory.