


- ▼ Simple Drive Requirement
- ▼ Low On-resistance
- ▼ Fast Switching Performance
- ▼ RoHS Compliant & Halogen-Free




N-CH	BV_{DSS}	40V
	$R_{DS(ON)}$	28m Ω
	I_D	6A
P-CH	BV_{DSS}	-40V
	$R_{DS(ON)}$	42m Ω
	I_D	-5A

Description

XP4525 series are innovated design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The SO-8 package is widely preferred for all commercial-industrial surface mount applications using infrared reflow technique and suited for voltage conversion or switch applications.

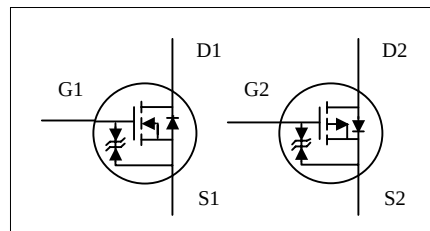

Absolute Maximum Ratings@ $T_J=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Rating		Units
		N-channel	P-channel	
V_{DS}	Drain-Source Voltage	40	-40	V
V_{GS}	Gate-Source Voltage	± 16	± 16	V
$I_D@T_A=25^\circ\text{C}$	Drain Current, $V_{GS} @ 10V^3$	6.0	-5.0	A
$I_D@T_A=70^\circ\text{C}$	Drain Current, $V_{GS} @ 10V^3$	5.0	-4.0	A
I_{DM}	Pulsed Drain Current ¹	30	-30	A
$P_D@T_A=25^\circ\text{C}$	Total Power Dissipation	2.0		W
	Linear Derating Factor	0.016		W/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150		$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150		$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Value	Unit
Rthj-a	Maximum Thermal Resistance, Junction-ambient ³	62.5	$^\circ\text{C}/\text{W}$

N-CH Electrical Characteristics@ $T_j=25^{\circ}\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	40	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	-	0.04	-	$V/^{\circ}\text{C}$
$R_{DS(ON)}$	Static Drain-Source On-Resistance ²	$V_{GS}=10V, I_D=6A$	-	-	28	$m\Omega$
		$V_{GS}=4.5V, I_D=4A$	-	-	32	$m\Omega$
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	1	-	3	V
g_{fs}	Forward Transconductance	$V_{DS}=10V, I_D=6A$	-	6	-	S
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=40V, V_{GS}=0V$	-	-	1	μA
	Drain-Source Leakage Current ($T_j=70^{\circ}\text{C}$)	$V_{DS}=32V, V_{GS}=0V$	-	-	25	μA
I_{GSS}	Gate-Source Leakage	$V_{GS}=\pm 16V, V_{DS}=0V$	-	-	± 30	μA
Q_g	Total Gate Charge	$I_D=6A$	-	8	13	nC
Q_{gs}	Gate-Source Charge	$V_{DS}=20V$	-	1.5	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{GS}=4.5V$	-	4	-	nC
$t_{d(on)}$	Turn-on Delay Time	$V_{DS}=20V$	-	7	-	ns
t_r	Rise Time	$I_D=6A$	-	20	-	ns
$t_{d(off)}$	Turn-off Delay Time	$R_G=3\Omega, V_{GS}=10V$	-	20	-	ns
t_f	Fall Time	$R_D=3.3\Omega$	-	4	-	ns
C_{iss}	Input Capacitance	$V_{GS}=0V$	-	580	930	pF
C_{oss}	Output Capacitance	$V_{DS}=25V$	-	100	-	pF
C_{rss}	Reverse Transfer Capacitance	$f=1.0\text{MHz}$	-	70	-	pF
R_g	Gate Resistance	$f=1.0\text{MHz}$	-	2	3	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ²	$I_S=1.1A, V_{GS}=0V$	-	-	1.8	V
t_{rr}	Reverse Recovery Time	$I_S=6A, V_{GS}=0V$	-	20	-	ns
Q_{rr}	Reverse Recovery Charge	$dI/dt=100A/\mu s$	-	12	-	nC

P-CH Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250uA	-40	-	-	V
ΔBV _{DSS} /ΔT _j	Breakdown Voltage Temperature Coefficient	Reference to 25 °C, I _D =-1mA	-	-0.02	-	V/°C
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V _{GS} =-10V, I _D =-5A	-	-	42	mΩ
		V _{GS} =-4.5V, I _D =-3A	-	-	60	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250uA	-0.8	-	-2.5	V
g _{fs}	Forward Transconductance	V _{DS} =-10V, I _D =-5A	-	5	-	S
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-40V, V _{GS} =0V	-	-	-1	uA
	Drain-Source Leakage Current (T _j =70°C)	V _{DS} =-32V, V _{GS} =0V	-	-	-25	uA
I _{GSS}	Gate-Source Leakage	V _{GS} =±16V, V _{DS} =0V	-	-	±30	uA
Q _g	Total Gate Charge	I _D =-5A	-	9	24	nC
Q _{gs}	Gate-Source Charge	V _{DS} =-20V	-	2	-	nC
Q _{gd}	Gate-Drain ("Miller") Charge	V _{GS} =-4.5V	-	5	-	nC
t _{d(on)}	Turn-on Delay Time	V _{DS} =-20V	-	8.5	-	ns
t _r	Rise Time	I _D =-5A	-	15	-	ns
t _{d(off)}	Turn-off Delay Time	R _G =3Ω, V _{GS} =-10V	-	27	-	ns
t _f	Fall Time	R _D =4Ω	-	25	-	ns
C _{iss}	Input Capacitance	V _{GS} =0V	-	770	1230	pF
C _{oss}	Output Capacitance	V _{DS} =-20V	-	165	-	pF
C _{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	115	-	pF
R _g	Gate Resistance	f=1.0MHz	-	6	9	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V _{SD}	Forward On Voltage ²	I _S =-1.1A, V _{GS} =0V	-	-	-1.8	V
t _{rr}	Reverse Recovery Time	I _S =-5A, V _{GS} =0V	-	20	-	ns
Q _{rr}	Reverse Recovery Charge	dI/dt=-100A/μs	-	16	-	nC

Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in² copper pad of FR4 board , t ≤10sec ; 135°C/W when mounted on min. copper pad.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

XSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

XSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

N-Channel

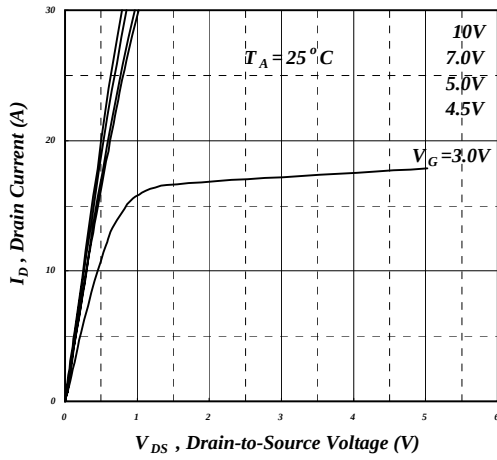


Fig 1. Typical Output Characteristics

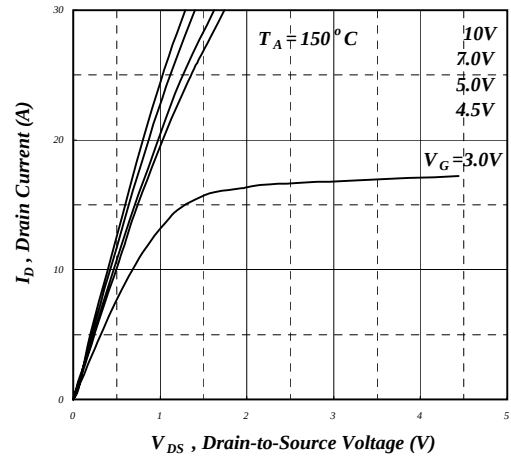


Fig 2. Typical Output Characteristics



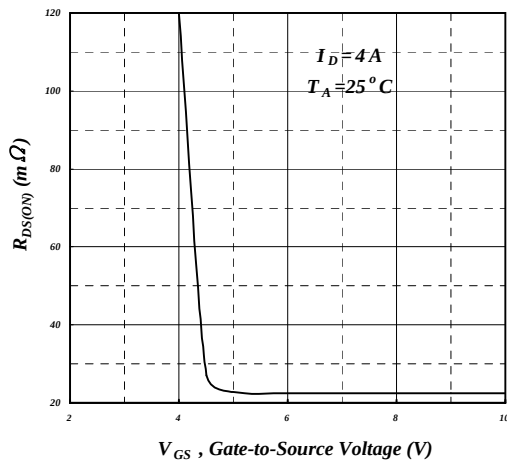



Fig 3. On-Resistance v.s. Gate Voltage

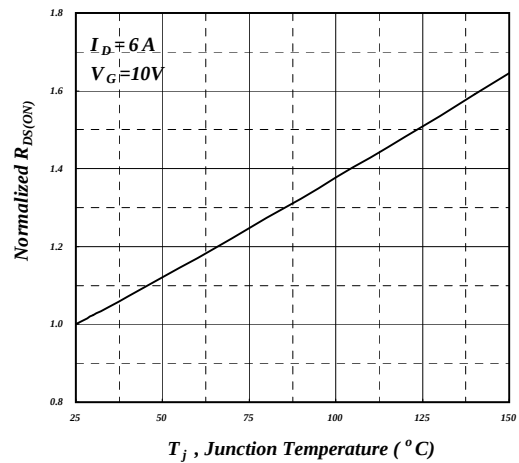

**Fig 4. Normalized On-Resistance
v.s. Junction Temperature**

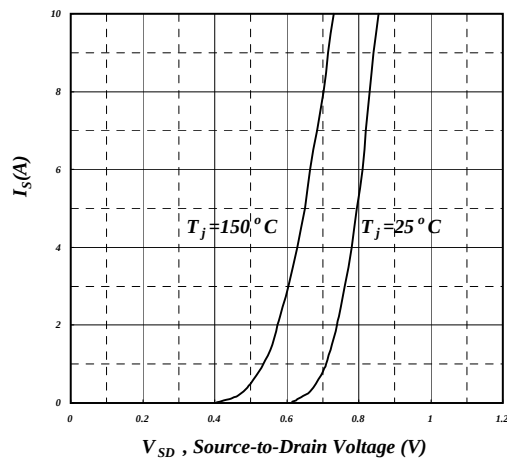

**Fig 5. Forward Characteristic of
Reverse Diode**

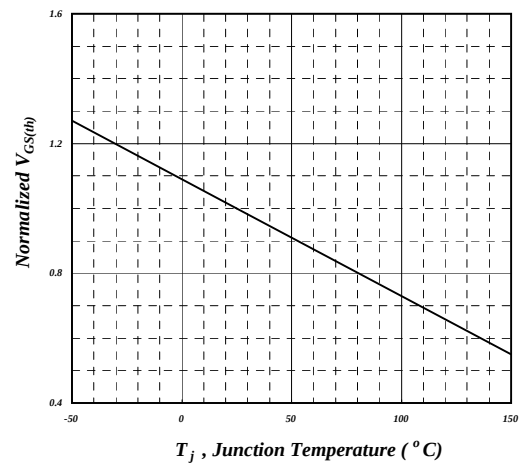

**Fig 6. Gate Threshold Voltage v.s.
Junction Temperature**

N-Channel

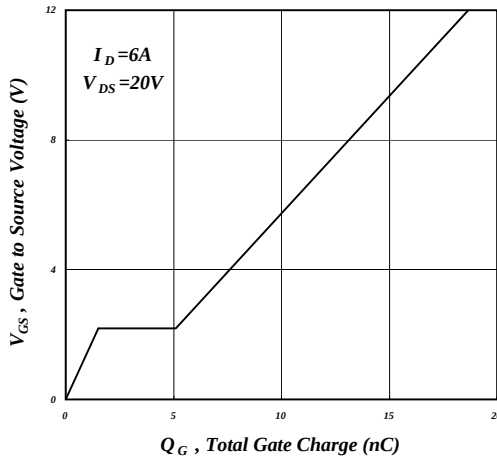


Fig 7. Gate Charge Characteristics

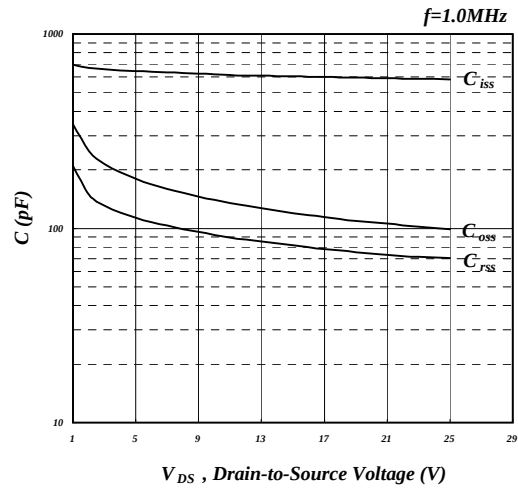


Fig 8. Typical Capacitance Characteristics

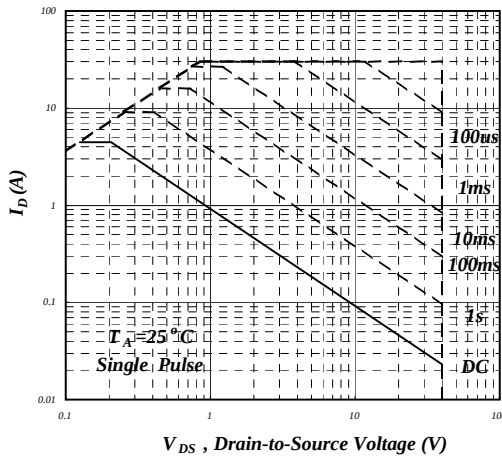


Fig 9. Maximum Safe Operating Area

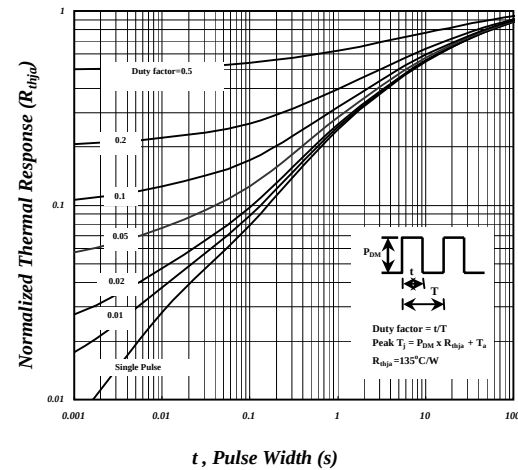


Fig 10. Effective Transient Thermal Impedance

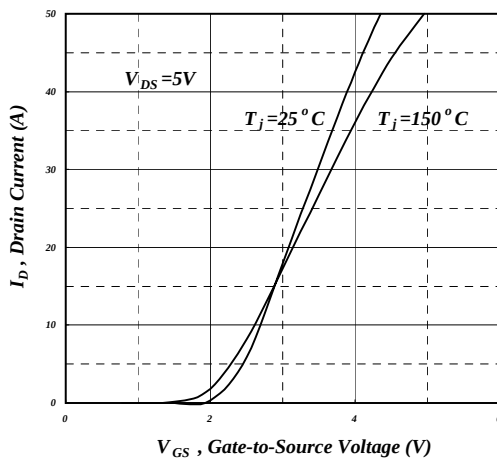


Fig 11. Transfer Characteristics

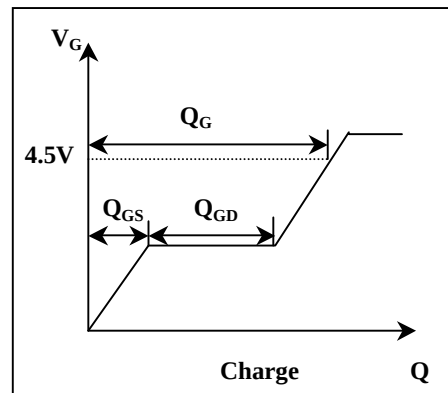


Fig 12. Gate Charge Waveform

P-Channel

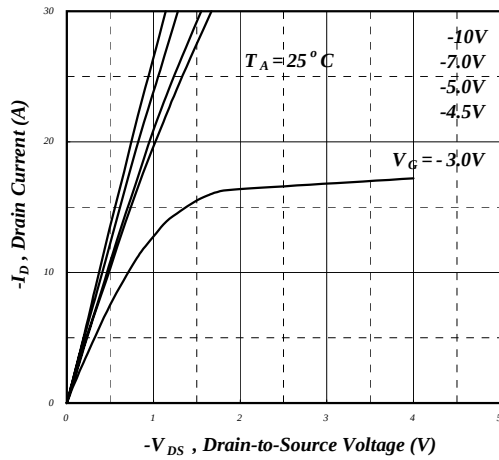


Fig 1. Typical Output Characteristics

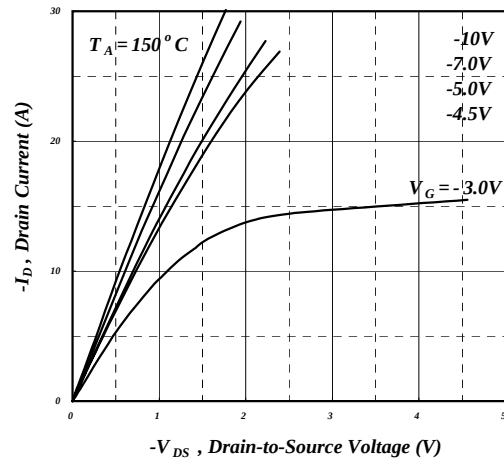


Fig 2. Typical Output Characteristics



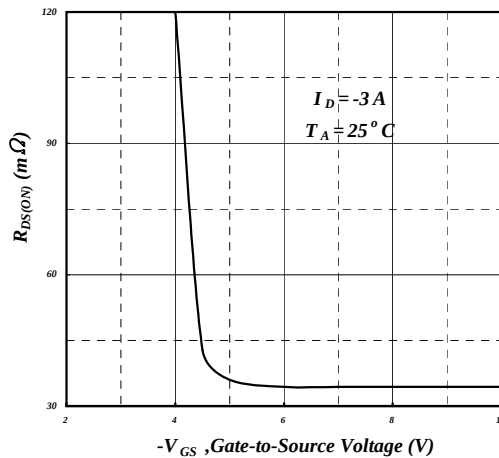



Fig 3. On-Resistance v.s. Gate Voltage

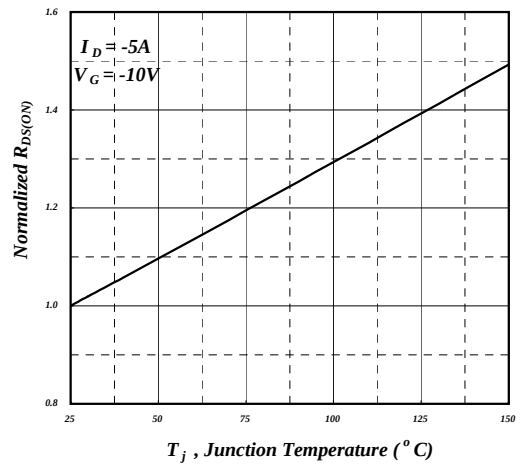

**Fig 4. Normalized On-Resistance
v.s. Junction Temperature**

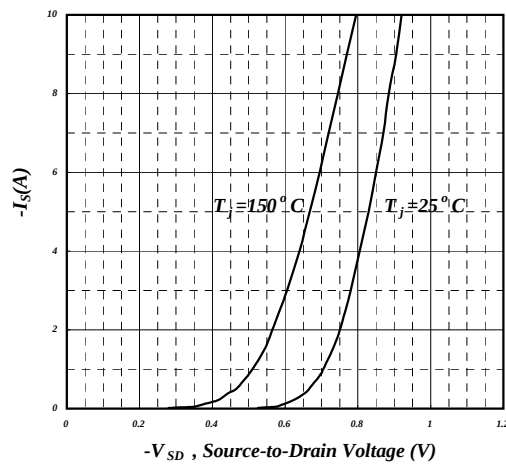

**Fig 5. Forward Characteristic of
Reverse Diode**

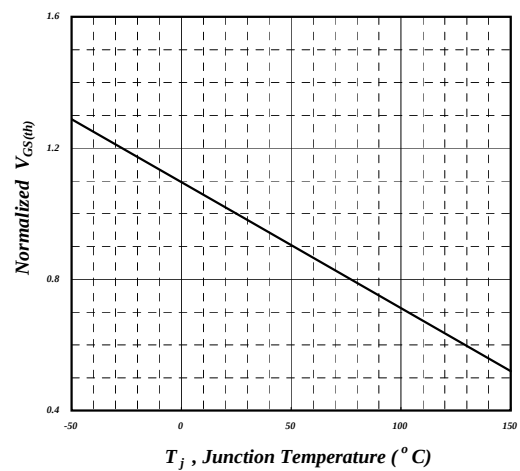

**Fig 6. Gate Threshold Voltage v.s.
Junction Temperature**

P-Channel

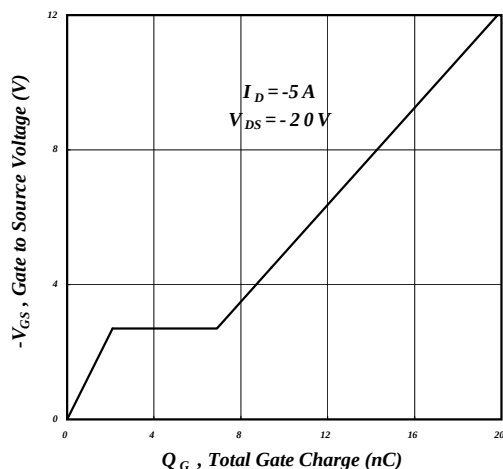


Fig 7. Gate Charge Characteristics

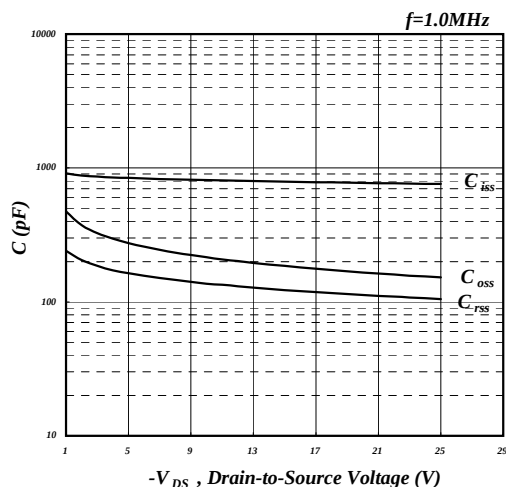


Fig 8. Typical Capacitance Characteristics

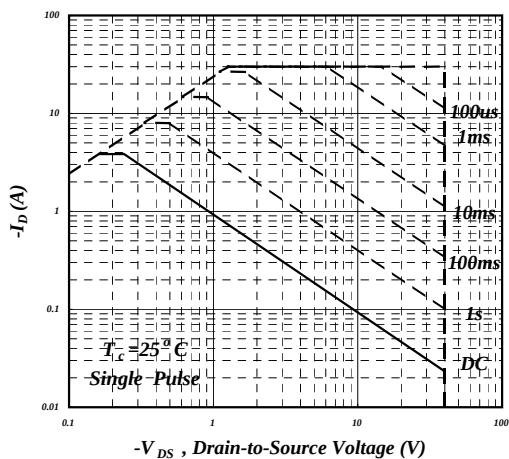


Fig 9. Maximum Safe Operating Area

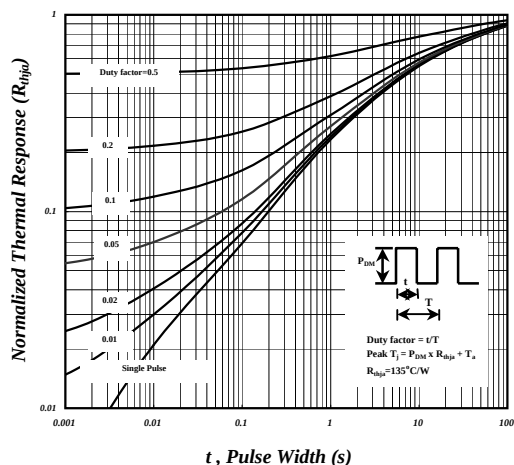


Fig 10. Effective Transient Thermal Impedance

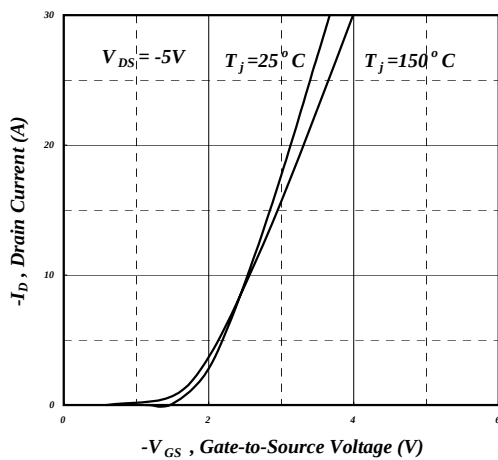


Fig 11. Transfer Characteristics





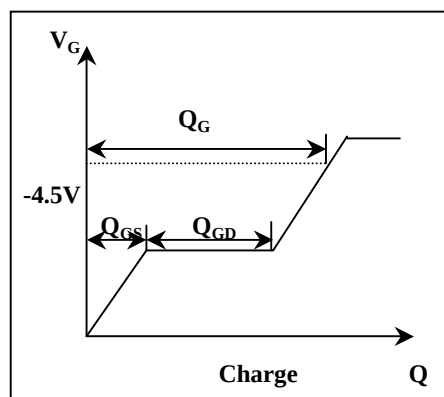


Fig 12. Gate Charge Waveform

MARKING INFORMATION

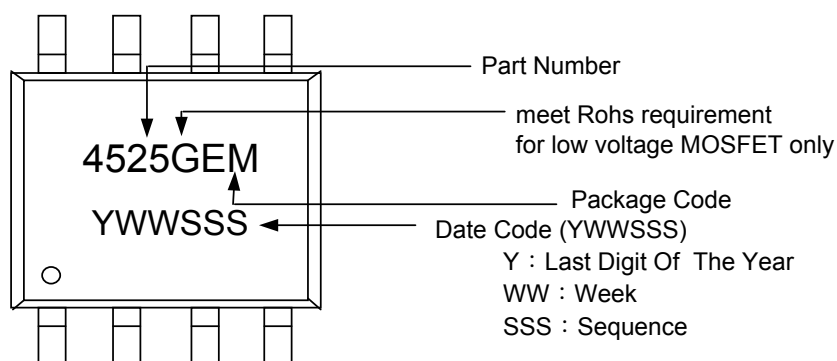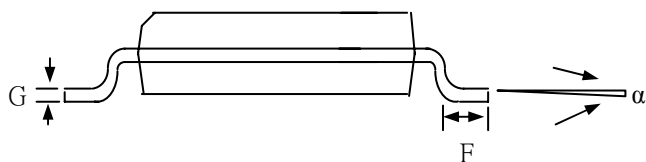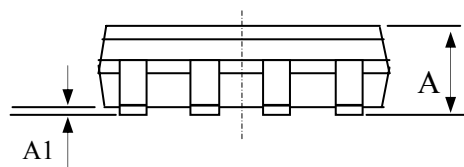

Package Outline : SO-8

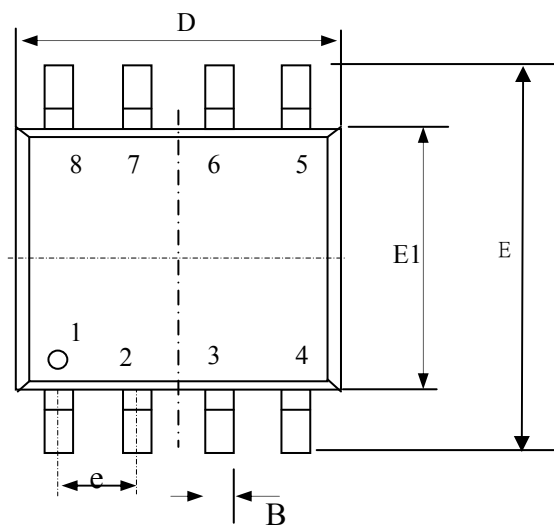

SYMBOLS	Millimeters		
	MIN	NOM	MAX
A	1.35	1.55	1.75
A1	0.05	0.15	0.25
B	0.30	0.41	0.51
D	4.80	5.05	5.30
E	5.79	6.00	6.20
E1	3.70	3.90	4.10
e	1.27 TYP		
G	0.17	0.21	0.25
F	0.38	0.83	1.27
α	0°	4°	8°

- 1.All Dimension Are In Millimeters.
- 2.Dimension Does Not Include Mold Protrusions.

SO-8 FOOTPRINT :